



HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT

NO:-PW-SD-CB/Tender/NIT/2020-Vol-XI- 1080 Dated- 23/05/2025
To


The Executive Engineer (IT) Cell,
HP. PWD, Nirman Bhawan, Nigam Vihar,
HP. PWD, Shimla -2.

Subject: - Regarding publication of Tender notice on departmental website.
Sir,

With reference to the notification issued by the Secretary (PW) to the Government of Himachal Pradesh No. PBW(B)A(3)1/2024 dated-03/01/2024 & further corrigendum on dated- 08/01/2025. Enclosed please find herewith the copy of tender notice for the publishing on departmental website.

Certified that the work mentioned in the Tender Notice are urgent in nature.

Encl:-As above.



Executive Engineer,
Spiti B&R Division,
HP. PWD, KAZI

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
*NOTICE INVITING TENDER***

Scaled rate/percentage rate tenders are hereby invited by the Executive Engineer, Spiti B&R Division, HP.PWD; Kaza on behalf of the Governor of Himachal Pradesh for the below noted works from eligible Contractors registered in H.P.P.W.D. in appropriate class so as to reach in this office on or before **31/05/2025 up to 3.00 PM.** and the same shall be opened on the same day at **3.30 PM.** in the presence of the Contractors or their authorized representatives who may be present. The tender forms can be had from this office against cash payment (Non Refundable) on **30/05/2025.**

The tender shall accompany with earnest Money which should be in the shape of NSC/Time Deposit/Saving Bank account in the Post Office/bank in H.P. duly pledged in the favour of undersigned. Conditional tenders, telegraphic and tender without earnest money will not be entertained. The Executive Engineer, Spiti B&R Division, HP.PWD; Kaza reserves the right to accept or reject the tenders. The tender shall remain valid for 120 days from the date of opening of the tenders.

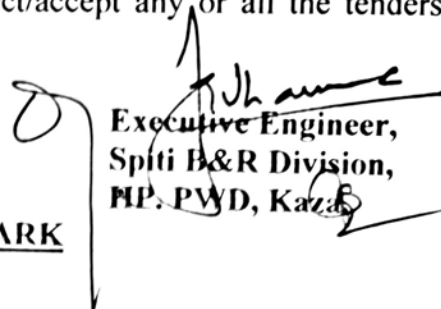
Sr.No	Name of Work	Estimated Cost	Earnest Money	Time Allowed
1	A/R&M/O Executive Engineer Residence at Kaza Distt. Lahaul & Spiti (H.P). (SH: - Providing & Fixing fly proof wire gauze to window and Floor Tiles in Toilet thereof.	70013	2000	One Month
2	A/R&M/O Executive Engineer Residence at Kaza Distt. Lahaul & Spiti (H.P). (SH: - Repair to plaster, painting, Distempering. Providing and Fixing various Sanitary & Water Supply Fixture, Demolition & Dismantling of floors and fixing new Tiles).	90474	2000	One Months
3	Restoration of snow damages of various road under Hurling Sub Division. (SH:- Hiring of JCB/ loader cum –excavator for removal of snow damages /slips.	99200	2000	15 Days
4	Restoration of snow damages of various road under Gulling section Sub division Sichling . (SH:- Hiring of JCB/ loader cum –excavator for removal of snow damages /slips.	99200	2000	15 Days


**Executive Engineer,
Spiti B&R Division,
HP. PWD, Kaza.**

TERMS AND CONDITIONS:-

1. The Contractor/Firm shall have his/their PAN, GST No. & copy of the same be attached with the application.
2. The intending Contractor/Firm Should have attached copy of registration/renewal, copy of registration under EPF & miscellaneous provision Act-1952 with application.
3. The intending Contractors are requested to see the site of the work before submitting the tender.

4. Tender forms for two works only shall be issued to each Contractor who has no previous pending works.
5. The Executive Engineer reserves the right to reject/accept any or all the tenders without assessing any reasons.


Executive Engineer,
Spiti B&R Division,
HP. PWD, Kaza

HIMSUCHANA AVAM JANSAMPARK

DRAFT SCHEDULE OF QUANTITY

Name of work:- A/R & M/O Executive Engineer Residence at Kaza, Distt. Lahaul Spiti (H.P.) SH:- Providing & fixing fly proof wire gauze to windows and Floor Tiles in Toilet thereof.

Estimated Cost:-	70013
Earnest Money:-	1500
Time:-	One Month

Sr. No.	Description of Item	Qty	Unit	Rate	In Figure	Amount
1	Providing and fixing wire gauge shutters using stainless steel grade 304 wire directions for doors, windows and clerestory windows with necessary screws : 35 mm thick shutter with ISI marked M.S. pressed butt hinges bright finished of required size as per HP.PWD. Specification 1990 (One thousand Nine hundred Ninety) Volume-1 (One), including carriage of all labour equipment and material to various locations through all modes of transportation in all leads and lifts, including all incidental charges.	1.62	P.Sqm	5748.06	Rupees Five Thousand Seven Hundred & Fourty Eight - Paise Six Only	9312
2	Providing and fixing Ist quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete. Size of Tile 600x1200 mm. as per HP.PWD. Specification 1990 (One thousand Nine hundred Ninety) Volume-1 (One), including carriage of all labour equipment and material to various locations through all modes of transportation in all leads and lifts, including all incidental charges.	44.92	P.Sqm	1351.32	Rupees One Thousand Three Hundred & Fifty One - Paise Thirty Two Only	60701
Total:-						70013

Sr.No 22 For the year 2025-26

In Words:-

Rupees Seventy Thousand & Thirteen Only

Draft Schedule of Quantity approved for Rs.

70013 / Only

H. R. P. W. D.
Executive Engineer,
 Spiti B&R Division,
 H.R.P.W.D; Kaza.

DRAFT SCHEDULE OF QUANTITY

Estimated Cost:-	90474
Earnest Money:-	2000
Time:-	One Month

Name of work:- A/R & M/O Executive Engineer Residence at Kaza, Distt. Lahaul Spiti (H.P.) SH:- Repairs to plaster, Painting, Distemping, Providing and Fixing Various Sanitary and Water Supply Fixture, Demodulation and Dismantling of floors and Fixing New Tiles thereof

Sl. No.	Description of Item	Qty	Unit	Rate	In Figure	Amount
1	Dismantling W.C. Pan of all sizes including disposal of dismantled MATERIALS i/c malba all complete as per directions of Engineer-in-Charge.	2.00	Each.	117.97	Rupees One Hundred & Seventeen - Paise Ninety Seven Only	236
2	Demolishing cement concrete manually/C.C. Block Masonry by mechanical means including disposal of MATERIAL within 50 metres lead as per direction of Engineer-in-charge. Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	1.88	Per Cum	2053.87	Rupees Two Thousand & Fifty Three - Paise Eighty Seven Only	3861
3	Dismantling tile work in floors/walls and roofs laid in cement mortar including stacking MATERIAL within 50 metres lead.	44.81	P. Sqm.	65.77	Rupees Sixty Five - Paise Seventy Seven Only	2947
4	Repairs to plaster of thickness 12 mm to 20 mm in patches of area 2.5 sq.meters and under, including cutting the patch in proper shape, raking out joints and preparing and plastering the surface of the walls complete. including disposal of rubbish to the dumping ground, all complete as per direction of Engineer-in-Charge. With cement mortar 1:4 (1 cement : 4 fine sand)	26.95	P. Sqm.	519.47	Rupees Five Hundred & Nineteen - Paise Fourty Seven Only	14000
5	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (within all lead and lift including dressing of sides and ramming of bottoms, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. upto 1.5 m height in 50% soil and 50% ordinary rock	5.94	CUM	384.11	Rupees Three Hundred & Eighty Four - Paise Eleven Only	2282
6	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:4:8 (1 Cement : 4 coarse sand) : 8 graded stone aggregate 40 mm nominal size)	0.66	CUM	9164.28	Rupees Nine Thousand One Hundred & Sixty Four - Paise Twenty Eight Only	6048
					Rupees only	0

	Providing 40x5 mm flat iron hold fast 40 cm long including fixing to frame with 10 mm diameter bolts, nuts and wooden plugs and embedding in cement concrete block 30x10x15cm 1:3:6 mix (1 cement : 3 coarse sand : 6 graded stone aggregate 20mm nominal size).	12.00	NOS.	221.40	Rupees Two Hundred & Twenty One - Paise Forty Only	2657
8	Providing and fixing aluminium sliding door bolts, ISI marked anodised (anodic coating not less than grade AC 10 as per IS : 1868), transparent or dyed to required colour or shade, with nuts and screws etc. complete :				Rupees only	0
a)	300x16 mm	4.00	NOS.	277.17	Rupees Two Hundred & Seventy Seven - Paise Seventeen Only	1109
9	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete :				Rupees only	0
b)	150x10 mm	6.00	NOS.	121.79	Rupees One Hundred & Twenty One - Paise Seventy Nine Only	731
10	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete :				Rupees only	0
b)	100mm	3.00	NOS.	111.10	Rupees One Hundred & Eleven - Paise Ten Only	333
11	Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia & length (hold fast lugs or dash fastener shall be paid for separately). Second class Pipe wood.	0.08	P.Cum	125147.50	Rupees One Lakh Twenty Five Thousand One Hundred & Fourty Seven - Paise Fifty Only	10012
12	Providing and fixing panelled or panelled and glazed shutters for doors, windows and clerestory windows fixing with butt hinges of required size with necessary screws, excluding panelling which will be paid for separately, all complete as per direction of Engineer-in-charge. (Note:- Butt hinges and necessary screws shall be paid separately)Second class teak wood 35 mm thick shutters Second class teak wood 30 mm thick shutters	1.62	P.Sqm	4934.54	Rupees Four Thousand Nine Hundred & Thirty Four - Paise Fifty Four Only	7994

Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including grouting the joints with white cement and matching pigments etc., complete. Size of Tile 600x600 mm.

14	Finishing with Deluxe Multi surface paint system for interiors and exteriors using Primer as per manufacturers specifications : Painting wood work with Deluxe Multi Surface Paint of required shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @0.75 ltr/10 sqm of approved brand and manufacture	1.62	Square meter	145.11	Rupees One Hundred & Forty Five - Paise Eleven	235
15	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	13.84	Square meter	171.82	Rupees One Hundred & Seventy One - Paise Eighty Two Only	2378
16	Disiempering with dry distemper of approved brand and manufacture (two or more coats) of required shade on new work, over and including water thinnable priming coat to give an even shade.	13.84	Square meter	131.84	Rupees One Hundred & Thirty One - Paise Eighty Four Only	1825
17	Excavation trench of required width of pipes cables etc. Pipes, cables etc, not exceeding 80 mm dia.	20.00	mnt	243.06	Rupees Two Hundred & Forty Three - Paise Six Only	4861
18	Providing and fixing white vitreous china pedestal type water closet (European type) with seat and lid, 10 litre low level white vitreous china flushing cistern & C.P. flush bend with fittings & C.I. brackets, 40 mm flush bend, overflow arrangement with specials of standard make and mosquito proof coupling of approved municipal design complete, including painting of fittings and brackets, cutting and making good the walls and floors wherever required :	1.00	each	8968.77	Rupees Eight Thousand Nine Hundred & Sixty Eight - Paise Seventy Seven Only	8969
Total:-						90474

Sr.No 31 For the year 2025-26
In Words:- Rupees Ninety Thousand Four Hundred & Seventy Four Only
Draft Schedule of Quantity approved for Rs. **90474** / Only

Handwritten signature
Executive Engineer,
Spiti B&R Division,
H.P.B.W.D, Kaza.

Draft Schedule of Quantity.

Draft Schedule of Quantity.				Estimated cost:-	99200	
				Earnest money:-	2000	
				Time Limit:-	15Days	
Name of work:- Restoration of snow damages of various road under Sub division Hurling. (SH:- Hiring of JCB/ loader cum -excavator for removal of snow Damages/slips.						
Sno	Description of items.	Quantity.	Unit.	Rates.		Amount.
				In figure.	In words.	
1	2	3	4	5	6	7
1	Hiring of Hydraulic, excavator cum loader for removal of snow/slips clearance from the road surfaces including all and MORD specification including carriage of all labour equipment and materials to various location of site through all modes of transportations in all leads lifts and all incidental charges .	64	Per Hour.	1550.00	Rupees One Thousand Five Hundred & Fifty Only	99200
<u>TERMS AND CONDITIONS:-</u>						
(a)	Hire charges should include expenses on account of establishment POL Major and minor repairs/over hauling and replacement of tyres and batteries if reqd.					
(b)	Hire charges should also include insurance of machinery/vehicles and establishment and the department shall not be responsible for any fatal/non fatal accidents.					
(c)	Hire charges should also include all local or out side taxes including of road tax entry tax and other taxes if any.					
(d)	Hire charges shall be payable only on signing of contract agreement and bringing the machinery/vehicles to the site as per the direction of Engineer-in-Charge.					
(e)	Minimum work as per PWD norms must be executed by the machinery hired.					
(f)	The bucket and loader capacity of JCB cum excavator should not be less than 0.24cum and one cum. Respectively and BHP is 72.The machinery should be of latest Model not older than 1999.					
(g)	Qty. of excavated/removed/snow material should not be less than 28 Cum/per hour.					
					Total:-	99200

Sr.No 33 For the year 2025-26
 Draft Schedule of Quantity approved for Rs. 99200 / Only
 In word Rupees Ninety Nine Thousand Two Hundred Only

K. H. Kumar
 Executive Engineer,
 Spiti B&R Division,
 H.R.P.W.D; Kaza.

Draft Schedule of Quantity.

Draft Schedule of Quantity.				Estimated cost:-	99200	
				Earnest money:-	2000	
				Time Limit:-	15Days	
Name of work:- Restoration of snow damages of various road under Gulling Section Sub division Sichling. (SH.- Hiring of JCB/loader cum –excavator for removal of snow Damages/slps.						
Sno	Description of items.	Quantity.	Unit.	Rates.		Amount.
				In figure.	In words.	
1	2	3	4	5	6	7
1	Hiring of Hydraulic, excavator cum loader for removal of snow/slps clearance from the road surfaces including all and MORD specification including carriage of all labour equipment and materials to various location of site through all modes of transportations in all leads lifts and all incidental charges.	64	Per Hour.	1550.00	Rupees One Thousand Five Hundred & Fifty Only	99200
TERMS AND CONDITIONS:-						
(a)	Hire charges should include expenses on account of establishment POL Major and minor repairs/over hauling and replacement of tyres and batteries if reqd.					
(b)	Hire charges should also include insurance of machinery/vehicles and establishment and the department shall not be responsible for any fatal/non fatal accidents.					
(c)	Hire charges should also include all local or out side taxes including of road tax entry tax and other taxes if any.					
(d)	Hire charges shall be payable only on signing of contract agreement and bringing the machinery/vehicles to the site as per the direction of Engineer-in-Charge.					
(e)	Minimum work as per PWD norms must be executed by the machinery hired.					
(f)	The bucket and loader capacity of JCB cum excavator should not be less than 0.24cum and one cum. Respectively and BHP is 72.The machinery should be of latest Model not older than 1999.					
(g)	Qty. of excavated/removed/snow material should not be less than 28 Cum/per hour.					
					Total:-	99200

Sr.No 32 For the year 2025-26

Draft Schedule of Quantity approved for Rs. 99200 / Only
In word Rupees Ninety Nine Thousand Two Hundred Only

H.P.P.W.D. Kaza.
Executive Engineer,
Spiti B&R Division,
H.P.P.W.D. Kaza.