

H.P.PWD TENDERS

Scaled percentage rate tenders on form No. 8 are invited by the Executive Engineer, Kotkhai Division, HPPWD, Kotkhai for the following works from the approved and eligible contractors enlisted in HP.PWD, so as to reach in his office on or before 14-07-2025 upto 11:00 A.M. and will be opened on the same day at 11:30 A.M. in the presence of the intending contractors or their authorized representatives. The tender forms can be had from his office against cash payment on 11-07-2025 upto 11:00 A.M. to 4:00 P.M. The earnest money in the shape of National Saving Certificate / Time deposit account / saving bank account / FDR in any of the Post Office in Himachal Pradesh duly pledged in the name of the undersigned must accompany with each tenders. The tender form will be issued on contractor giving proof of enlistment. GST. Conditional tender and tender received without earnest money will be out rightly rejected. The offer of the tender shall be kept open for 10 days. The Executive Engineer reserves the right to reject any or all the tenders without assigning any reasons.

The draft NIT and other specifications and conditions of the tender can be seen by the contractors in the office of the undersigned on any working day during the office hours.

Sr. No.	Name of works	Estimated cost	Earnest Money	Cost of Form	Eligible Class of Contractor	Time
1.	Restoration of rain damages on various roads under Kalbog Sub-Division (Chamain Section) (SH:- Hiring of Hydraulic excavator cum loader for removal of slips on various roads under Chamain Section)	99,000/-	2,000/-	350/-	Class D & Class C	30 Days
2.	Restoration of rain damages on various roads under Kalbog Sub-Division (Kalbog Section) (SH:- Hiring of Hydraulic excavator cum loader for removal of slips on various roads under Kalbog Section)	99,000/-	2,000/-	350/-	Class D & Class C	30 Days
3.	Restoration of rain damages on various roads under Kalbog Sub-Division (Rawlakai Section) (SH:- Hiring of Hydraulic excavator cum loader for removal of slips on various roads under Rawlakai Section)	99,000/-	2,000/-	350/-	Class D & Class C	30 Days
4.	Restoration of rain damages on various roads under Kalbog Sub-Division (Baghi Section) (SH:- Hiring of Hydraulic excavator cum loader for removal of slips on various roads under Baghi Section)	99,000/-	2,000/-	350/-	Class D & Class C	30 Days

Certified that tender of above works are being called of emergent nature in exigency of public interest.

Terms and Conditions:-


1. The contractor should produce a documents of ownership i.e. R.C. or hiring/release agreement as the case maybe, while bidding for the above tenders. In case of non-submission of the same along with the bid shall be considered unresponsive.
2. The contractor should produce a copy of enlistment / renewal letter at time of application.
3. Executive Engineer reserves the right to reject / cancel any or all the tenders without assigning any reasons.

HIMACHAL PRADESH PUBLIC WORKS DEPARTMENT (B&R) DIVISION KOTKHAJ

100

HIMACHAL PRADESH PUBLIC WORKS DEPARTMENT (B&R) DIVISION KOTKHAJ

4. The contractor / firm shall have his registration and GST No., the copy of same be attached with the application.
5. The earnest money shall be deposited in the shape of FDR duly pledged in favour of Executive Engineer, Dist Kotkhai, HPPWD Kotkhai and cost of tender form for the above works should be submitted with the application. The purchase of tender forms. The applications received without earnest money and cost of tender form shall be similarly rejected.
6. The contractor / firms are requested to insert the percentage rate in words as in figures falling which XES reserve the rights to accept / reject any tender without assigning any reasons at any stage.
7. The tender shall be issued to those contractors who have not more than two works in hand.
8. If any date mentioned above happens to be a holiday, the same will be processed on the next day.


Executive Engineer,
(B&R) Division, HPPWD,
Kotkhai.

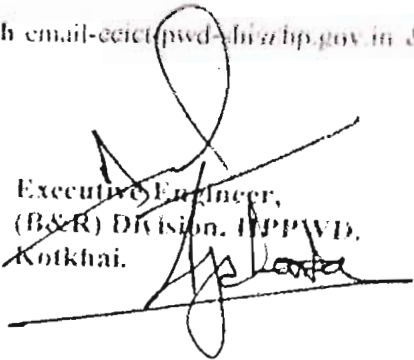
No:- PW-KD-E-Tender/2025-26:-

1749-54

Dated:- 04-7-25.

Copy forwarded to the following for information and necessary action to:-

1. The Chief Engineer (SZ), HPPWD, Nirman Bhawan, Nigam Yihar, Shimla-II.
2. The Superintending Engineer, 14th Circle, HPPWD Rohru.
3. The Executive Engineer (IT) O/o Engineer-in-Chief HPPWD Shimla through email-ecetcpwd-chi@hp.gov.in & ee-pwd-hp@nic.in for uploading the same on HPPWD web portal.
4. All the Assistant Engineer working under this Division.
5. Drawing Branch in this office.
6. Notice Board.


Executive Engineer,
(B&R) Division, HPPWD,
Kotkhai.

D.N.I.T.

2. Bill of Work - Extension of road damages on Agrius road under Kalyan Sub-Station (Haramin Section)
 3. Bill of Hydraulic excavator cum loader for removal of slips on various road under Haramin Section


ES/PA/11/2015/1000000
 DATED: 20/05/2015

12/06/15

Sl.No	Sub-head of item of work	Quantity	Rate in figure	Rate in words	Unit	Amount
1	Hauling of J.C.B. (Excavator-Cum-loader including P.O.L. charge, shifting charge and other ancillary equipment's as required at site of work for removal of slips in all heights in all kind of soil such as kankar, mossam shingle boulders decomposed or soft variety of soil such as spade work, pick work, jumper work, mechanical transportation of necessary. The disposal of this unserviceable material has to be done in the required width of the road to avoid damage to the properties of the people or in case any damage took place, the contractor is liable for it. All salvaged material such as quarried stone shall belong to the department and maximum useful quantity of stones from removal of slips shall have to be neatly stacked along road side on road berms. Minimum 40 cubic meter of earth work shall be done by machine in one hour, otherwise number of hours shall be reduced accordingly. The work shall have to be carried out as per Ministry of Transport as per instructions of the Engineer-in-Charge including all.	90.00	₹ 1,100.00	Rupees one thousand one hundred) only	Per hour	₹ 99,000.00
Total						₹ 99,000.00

D.N.I.T. is hereby recommended for

approval please


 Assistant Engineer,
 B&R Sub-Division,
 H.P.W.D. Kalyan.

Executive Engineer,
 B&R Division H.P.W.D.,
 Kalyan.

NAME OF WORK: Removal of sun damage on various roads under L&P Sub Division (Khalig section)
D.N.I.T.
SL - Lining of Hydraulic excavator cum loader for removal of slips on various roads under Khalig Section

ESTIMATED COST IN RS. 99,000/-
 LABOUR IN RS. 20,000/-

S.No	Sub-Head of Item of work	Quantity	Rate in figures	Rate in words	Unit	Amount
1	Hiring of J.C.B. excavator cum loader including P.O.L. charge, shifting charge and other necessary equipment's as required at site of work for removal of slips in all heights in all kind of soil such as bank, maximum single boulders decomposed or soft variety of soil such as spade work, pick work, jumper work, mechanical transportation of necessary. The disposal of this un-servicable material has to be done in the acquired width of the road to avoid damage to the properties of the people or in case any damage took place the contractor is liable for it. All salvaged material such as quarried stone shall belong to the department and maximum useful quantity of stones from removal of slips shall have to be neatly stacked along road side on road corners. Minimum 40 cubic meter of earth work shall be done by machine in one hour, otherwise number of hours shall be reduced accordingly. The work shall have to be carried out as per Ministry of Transport as per instructions of the Engineer-in-Charge including all.	90.00	₹ 1,100.00	Rupees one thousand one hundred only	hour	₹ 99,000.00
	Total					₹ 99,000.00

EST is hereby recommended for

approval of

[Signature]
 Assistant Engineer,
 L&P Sub-Division,
 K.P.P.W. Sub-Division.

DNT approved for Rs. 99,000/- Rs. Ninety Nine Thousand only

Executive Engineer,
 B&R Division N.P.P.W.D.,
 Kodur.

D.N.I.T.
NAME OF WORK :- Restoration of rain damages on various roads under Kallang Sub Division (Hawalakur Section)
(SIT - Hiring of Hydraulic excavator cum loader for removal of slips on various roads under Hawalakur Section)

ESTIMATED COST Rs. 99,000/-
 EARLIEST COMPLETION BY - 20/05/20

S.No	Sub-Head of Item of work	Quantity	Rate in Figure	Rate in words	Unit	Amount
1	Hiring of J.C.B. (Excavator-Cum-Loader) including P.O.L. charge, shifting charge and other ancillary equipment's as required at site of work for removal of slips in all heights in all kind of soil such as kankar, morum shingle boulders decomposed or soft variety of soil such as spade work, pick work, jumper work, mechanical transportation of necessary. The disposal of this un-serviceable material has to be done in the acquired width of the road to avoid damage to the properties of the people or in case any damage took place, the contractor is liable for it. All salvaged material such as quarried stone shall belong to the department and maximum useful quantity of stones from removal of slips shall have to be neatly stacked along road side on road burns. Minimum 40 cubic meter of earth work shall be done by machine in one hour, otherwise number of hours shall be reduced accordingly. The work shall have to be carried out as per Ministry of Transport as per instructions of the Engineer-in-Charge including all.	90.00	₹ 1,100.00	Rupees one thousand one hundred only	Cumulative	₹ 99,000.00
					Total	₹ 99,000.00

D.N.I.T is hereby recommended for

D.N.I.T approved for Rs. 99,000/- (Rs. Ninety Nine thousand) only

approved by:-

[Signature]

Assistant Engineer,
 R.R. Sub-Division,
 H.P.W. Division,
 Kallang.

Executive Engineer,
 R.R. Division H.P.W.D.,
 Kallang.

8.15
 1/2

D.N.I.T.

STATE OF WORK - Evaluation of road damages on various roads under Kabong Sub-Division (Barth Section)
 Item - Hiring of Hydraulic excavator cum loader for removal of slips on various roads under Barth Section)

ESTIMATED COST Rs. 99,000.00
 REQUEST FOR QUOTE No. - 2009-

Time: 11:00 AM

Sl. No	Sub-Head of Item of work	Quantity	Rate in figure	Rate in words	Unit	Amount
1	Hiring of J.C.M. (Excavator-Cum-Loader including P.O.L. charge, shifting charge and other ancillary equipment's as required at site of work for removal of slips in all heights in all kind of soil such as bankar, moorum, shingle boulders decomposed or soil variety of soil such as spade work, pick work, jumper work, mechanical transportation of necessary. The disposal of this un-serviceable material has to be done in the acquired width of the road to avoid damage to the properties of the people or in case any damage took place, the contractor is liable for it. All salvaged material such as quarried stone shall belong to the department and maximum useful quantity of stones from removal of slips shall have to be neatly stacked along road side on road burns. Minimum 40 cubic meter of earth work shall be done by machine in one hour, otherwise number of hours shall be reduced accordingly. The work shall have to be carried out as per Ministry of Transport as per instructions of the Engineer-in-Charge including all.	90.00	₹ 1,100.00	Ruppes one thousand one hundred) only	hour	₹ 99,000.00
Total						₹ 99,000.00

D.N.I.T is hereby recommended for

approval please

Assistant Engineer,
 B&R Sub-Division,
 H.P.W.D. Kabong.

D.N.I.T approved for Rs. 99,000.00 (Rs. Ninety Nine thousand) only

Executive Engineer,
 B&R Division H.P.W.D.,
 Kottahai