

HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
No.PW-SRDD-CB-CTR-NIT-2025-26-

9309-9331 Dated:- 25-09-2025

To

The Executive Engineer (IT Cell)
H.P.P.W.D. Nigam Vihar Shimla-2.

Subject:- **Notice Inviting Tender for uploading the same on departmental website.**

Enclosed please find herewith Notice Inviting Tender (NIT) of various works in respect of this office for uploading the same on departmental website as per notification Secy. (PW) to the Govt. of Himachal Pradesh letter No. PBW-BFO(2)/3/2024-284016 dated Shimla-2 the 09-09-2025 as the works mentioned in the tender Notice are urgent in nature and in public interest..

Encl:-Copy of NIT

Executive Engineer,
Shimla Rural Division
H.P.P.W.D. Dhamsi
Ph. 0177-2790534

Copy forwarded for the following for information and necessary action to:-

1. The Engineer-in-Chief, HPPWD., Nirman Bhawan, Nigam Vihar, Shimla-2
2. The Chief Engineer, (SZ) HPPWD., Nirman Bhawan, Nigam Vihar, Shimla
3. The Superintending Engineer, 4th Circle, HPPWD., Shimla-3.
4. All the Superintending Engineer, in HPPWD. (SZ)
5. The Deputy Commissioner Shimla Distt. Shimla.
6. The Sub Divisional Magistrate Shimla.
7. All the Executive Engineers in HPPWD, (SZ).
8. All the Assistant Engineer, working under this division.
9. All the heads of the branches in this office.
10. Notice Board.

Executive Engineer,
Shimla Rural Division
H.P.P.W.D. Dhamsi
Ph. 0177-2790534

HIMACHAL PRADESH

PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDER

Sealed percentage tenders on PWD Form 6 & 7/8 are hereby invited by the Executive Engineer Shimla Rural Division H.P.P.W.D. Dhama on behalf of Governor of Himachal Pradesh for the followings works from the eligible contractors enlisted in H.P.PWD. (B&R) whose registration stood renewed as per revised rules and also registered under the Central Goods and Services Tax Act, 2017 so as to reach in this office on before **04.10.2025 up to 11:30 AM** and the same shall be opened on the same day at **12:00 P.M.** in the presence of intending contractors or their authorized representative who may like to be present. The Tenders documents can be had from this office against cash payment (Non-refundable) on **03.10.2025 up to 5.00 PM** and the application for issue of tender form shall be received on **03.10.2025 up to 3:00 PM.**

The amount of earnest money in the shape of NSCs/FDR deposit at call of any of the Post office/Bank duly pledged in favour of Executive Engineer Shimla Rural Division HPPWD Dhama must be accompanied with the application for tender documents. Please not any exemption order of earnest money will be entertained. Conditional tenders and the tenders received without earnest money as mentioned above will similarly be rejected. The offer of the tenders shall be kept open for 75 days. The Executive Engineer reserve right to reject any tender of all tenders without assigning any reasons. If it happens to be a holiday on the day of opening of tenders the same will be opened on next working day at the same time and venue.

Sr. No.	Name of Work	Estimated Cost (In Rs.)	EMD	Time	Cost of Form
1	R/R damages on link road to Airport Km. 0/00 to 1/150(SH:- Construction of Retaining wall at Rd, 0/194.40 to 0/201.90).	486564/-	10000/-	One month	Rs.350/-
2	R/R damages on Badheri Shilly & Jadheni road under Jutogh sub division (SH:- Hiring of JCB for removal of slips).	295650/-	6000/-	One month	Rs.350/-
3	R/R damages on Asia The Down to Chakkar road Km. 0/00 to 1/790 (SH:- C/O R/Wall at Rd. 0/525 to 0/534.70) Balance work.	428789/-	10000/-	One month	Rs.350/-
4	R/R damages on Hiranagar Sharog road Km. 0/00 to 5/00 (SH:- C/O B/Wall & Edging at Rd.3/000 to 3/013.50).	388323/-	8000/-	One month	Rs.350/-
5	A/R & M/O on Hiranagar Sharog road Km. 0/00 to 5/00 (SH:- C/O R/Wall at Rd.3/070 to 3/080).	387971/-	8000/-	One month	Rs.350/-
6	A/R & M/O on Hiranagar Sharog road Km. 0/00 to 5/00 (SH:- C/O R/Wall at Rd.2/930 to 2/938.85).	397859/-	8000/-	One month	Rs.350/-
7	R/R damages on Chailly Khurd road Km. 0/00 to 1/300 (SH:- C/O R/Wall at Rd. 0/460 to 0/465).	195277/-	4000/-	One month	Rs.350/-
8	R/R damages on Chailly Khurd road Km. 0/00 to 1/300 (SH:- C/O R/Wall at Rd. 0/410 to 0/422).	469514/-	9000/-	One month	Rs.350/-
9	A/R & M/O to AE residence building at Shoghi (2216) (SH: Painting, Polishing & distempering etc.).	263724/-	5300/-	One month	Rs.350/-
10	A/R & M/O to non residential building at Shoghi (NR-2059 (SH: Painting, Polishing & distempering etc).	135615/-	2800/-	One month	Rs.350/-
11	A/R & M/O on Shakoh to Hanuman Mandir road Km. 0/00 to 1/250 (SH: C/O wing wall at Rd. 0/150) Balance Work.	431119/-	9000/-	One month	Rs.350/-
12	A/R & M/O of Galog Nehra Okhroo road Km. 0/00 11/135 (SH: C/O R/Wall at RD. 5/770 to 5/785).	491459/-	10000/-	One month	Rs.350/-
13	Special repair to Distt. Court Complex at Chakkar Shimla (SH: Providing & painting, distempering, ACP sheet ceiling, steel work and sanitary instalolation in Distt. Court complex Block A&B).	499708/-	10000/-	One Month	Rs.350/-

14	R/R damages on Anandpur to Tara Devi Temple road km. 0/00 to 2/200 (SH:- Removal of slips at various Rds.).	435367/-	8800/-	One month	Rs.350/-
15	R/R damages on Shoghi Mehli road km. 0/00 to 12/375 (SH:- C/O R/Wall at Rd. 4/390 to 4/402).	315556/-	6400/-	One month	Rs.350/-
16	R/R damages on Taradevi Gamber road km. 0/00 to 11/550 (SH:- C/O Wing Wall at Rd. 2/00) (Balance Work RHS)	205429/-	4200/-	One month	Rs.350/-
17	R/R damages on Shoghi Mehli road km. 0/00 to 12/375 (SH:- C/O edge wall along with parapets at Rd. 9/940 to 9/976).	371540/-	7500/-	One month	Rs.350/-
18	R/R damages on Anandpur to Anji Banari road km. 0/00 to 0/655 (SH:- C/O R/Wall at Rd. 0/646 to 0/653.50).	497453/-	10000/-	One month	Rs.350/-
19	C/O Science and Creativity centre at village Bhog Anandpur Shoghi (C/O Boundary wall a/w Planetarium (Balance Work) Job No. 2.	499270/-	10000/-	One month	Rs.350/-
20	C/O Science and Creativity centre at village Bhog Anandpur Shoghi (C/O Boundary wall a/w Planetarium (Balance Work)	499681/-	10000/-	One month	Rs.350/-
21	C/O Science and Creativity centre at village Bhog Anandpur Shoghi (C/O Septic tank a/w Hostel Block).	417151/-	9000/-	One month	Rs.350/-
22	A/R & M/O PWD Rest House at Tara Devi Shimla (SH: Supplying of drinking water in rest house Taradevi Shgimla).	497000/-	10000/-	One month	Rs.350/-
23	C/O Okhroo Nehra via Keru road Km. 0/00 to 3/00 (SH: C/O R/Wall at Rd. 0/968 to 0/987).	484865/-	10000/-	One month	Rs.350/-
24	C/O Gadheri to Touri road Km. 0/00 to 0/645 (SH: C/O R/Wall at Rd. 0/075 to 0/081.15, 0/115 to 0/124 & 0/124 0/133) (PCC).	299214/-	6000/-	One month	Rs.350/-
25	R/R damages on Bag to Kayalu road km. 0/00 to 10/500 (SH:- C/O B/Wall at Rd. 6/655.70 to 6/664, 6/664 to 6/672.30 & R/Wall at Rd. 6/805 to 6/812, 6/812 to 6/820 & 6/820 to 6/828).	494801/-	10000/-	One month	Rs.350/-
26	R/R damages on Gallu to Palged road Km. 0/00 to 9/600 (SH: Removal of land slide / slips at various Rds between Km. 2/00 to 6/00).	499855/-	10000/-	One month	Rs.350/-
27	R/R damages on Gallu to Palged road Km. 0/00 to 9/600 (SH: Removal of land slide / slips at various Rds between Km. 0/00 to 2/00).	498031/-	10000/-	One month	Rs.350/-
28	R/R damages on Bag to Kayalu road Km. 0/00 to 10/500 (SH: Removal of land slide / slips at various Rds between Km. 0/00 to 10/500).	498550/-	10000/-	One month	Rs.350/-
29	R/R damages on Kadharghat to Palag Serikedi road Km. 0/00 to 7/030 (SH: Removal of slips at various Rds in Km. 0/00 to 2/900).	496052/-	10000/-	One month	Rs.350/-
30	R/R damages on Kadharghat to Palag Serikedi road Km. 0/00 to 7/030 (SH: Removal of slips in Km. 2/900 to 7/030).	496594/-	10000/-	One month	Rs.350/-
31	Restoration of Rain Damages on Airport road km.0/00 to 1/150 (SH:-C/O R-Wall at Rd.0/187.20 to 0/194.40).	493224/-	10000/-	One month	Rs.350/-
32	Restoration of Rain Damages on Airport road km.0/00 to 1/150 (SH:-C/O R-Wall at Rd.0/180 to 0/187.20).	493394/-	10000/-	One month	Rs.350/-
33	A/R & M/O Wellness Center at Nehra Distt. Shimla (SH: P/F Prepainted sheet, roof, rafter, purlins etc.) Job No.3.	499881/-	10000/-	One month	Rs.350/-
34	A/R & M/O Wellness Center at Nehra Distt. Shimla (SH: P/F 19 mm thick commercial board & WS & SI works thereof) Job No. 4.	499947/-	10000/-	One month	Rs.350/-
35	R/R damages on Devidhar Bhajyar road Km. 0/00 to 2/200 (SH: C/O R/Wall at Rd. 1/620 to 1/642) Balance work.	233405/-	5000/-	One month	Rs.350/-
36	R/R damages on Banuti Dayla road Km. 0/00 to 1/00 (SH: C/O wire crate wall at Rd. 0/985 to 1/00) Job No.1.	486723/-	10000/-	One month	Rs.350/-
37	A/R & M/O Ghanahatti Parech road in Km. 0/00 to 1/800 (SH: C/O 2 nd step of b/Wall at Rd. 1/423 to 1/438).	350081/-	7000/-	One month	Rs.350/-
38	R/R damages on Shimla Mandi road Km. 39/200 to 52/300 (SH: Removal of slips/Landslide at various Rds.).	498634/-	10000/-	One month	Rs.350/-
39	R/R damages on Shimla Mandi road Km. 39/200 to 52/300 (SH: Supplying and eaing of stones/Boulders for filling in the washed out portion on Shimla Mandi road in Km. 51/240 to 52/000).	498541/-	10000/-	One month	Rs.350/-
40	Widening /Improvement of Slapper Tattapani Sunni Luhri road Km. 72/000 to 86/000 (SH: C/O R/Wall at Rd. 73/225 to 73/237).	484141/-	10000/-	One month	Rs.350/-
41	R/R damages on Shimla Mandi road Km. 39/200 to 52/300 (SH: C/O B/Wall at Rd. 44/865 to 44/484).	499660/-	10000/-	One month	Rs.350/-

42	R/R damages on Garkhan Bertii road Km. 0/000 to 5/000 (SH: Removal of Landslide at various Rds.).	498912/-	10000/-	One month	Rs.350/-
43	R/R damages on 16 Mile Sedan road Km. 0/00 to 2/660 (SH: C/O R/Wall at Rd. 0/008 to 0/016).	493007/-	10000/-	One month	Rs.350/-
44	R/R damages on 16 Mile Sedan road Km. 0/00 to 2/660 (SH: C/O R/Wall at Rd. 0/000 to 0/008).	493411/-	10000/-	One month	Rs.350/-
45	R/R damages on 16 Mile Sedan road Km. 0/00 to 2/660 (SH: C/O R/Wall at Rd. 0/020 to 0/030).	487603/-	10000/-	One month	Rs.350/-
46	R/R damages on 16 Mile Sedan road Km. 0/00 to 2/660 (SH: C/O R/Wall at Rd. 0/030 to 0/040).	487123/-	10000/-	One month	Rs.350/-
47	A/R & M/O PWD Rest House at Tara Devi Shimla (SH: P/F items in HP.PWD. Rest house.) Job No.I.	472830/-	10000/-	One month	Rs.350/-
48	A/R & M/O PWD Rest House at Tara Devi Shimla (SH: P/F items in HP.PWD. Rest house.) Job No.II.	491400/-	10000/-	One month	Rs.350/-
49	A/R & M/O PWD Rest House at Tara Devi Shimla (SH: Providing water proofing new rest house thereof).	498960/-	10000/-	One month	Rs.350/-
50	R/R damages on Shoghi Mehli road Km. 0/00 to 12/375 (SH: C/O R/Wall along with Toe wall at Rd. 7/210 to 7/222).	490378/-	10000/-	One month	Rs.350/-
51	R/R damages on Shoghi Mehli road Km. 0/00 to 12/375 (SH: C/O R/Wall along with Toe wall at Rd. 7/222 to 7/234).	493264/-	10000/-	One month	Rs.350/-
52	R/R damages on Shoghi Mehli road Km. 0/00 to 12/375 (SH: C/O R/Wall at Rd. 3/910 to 3/925).	293505/-	10000/-	One month	Rs.350/-
53	R/R damages on Shoghi Mehli road Km. 0/00 to 12/375 (SH: C/O R/Wall at Rd. 5/960 to 5/975).	485292/-	10000/-	One month	Rs.350/-
54	R/R damages on Shoghi Mehli road Km. 0/00 to 12/375 (SH: C/O R/Wall at Rd. 7/234 to 7/246.50). Balance work	490156/-	10000/-	One month	Rs.350/-
55	R/R damages on Shoghi Mehli road Km. 0/00 to 12/375 (SH: C/O R/Wall at Rd. 6/330 to 6/342). Balance work	489277/-	10000/-	One month	Rs.350/-
56	R/R damages on Tutikandi Sheelgoun via Kiari road Km. 0/00 to 3/870 (SH: C/O R/Wall at Rd. 2/200 to 2/216).	462556/-	10000/-	One month	Rs.350/-
57	R/R damages on Totu Taradevi bypass road Km. 0/00 to 4/105 (SH: Hiring of JCB for removal of slips at various Rds.).	498225/-	10000/-	One month	Rs.350/-
58	A/R & M/O Shoghi Dhari road Km. 0/00 to 6/150 (SH: C/O B/Wall at Rd. 0/545 to 0/551.59).	277447/-	5600/-	One month	Rs.350/-
59	R/R damages on Shimla Mandi road Km. 39/200 to 52/300 (SH: C/O B/Wall at Rd. 45/075 to 45/090).	383470/-	10000/-	One month	Rs.350/-
60	R/R damages on Basantpur Naltu road Km. 0/000 to 7/000 (SH: C/O R/Wall at Rd. 6/685 to 6/707).	495910/-	10000/-	One month	Rs.350/-
61	R/R damages on Okhroo Nehra via Keru road Km. 0/000 to 2/000 (SH: C/O R/Wall in between Km. 1/690 to 1/700).	344722/-	7000/-	One month	Rs.350/-
62	C/O Okhroo Nehra via Keru road Km. 0/000 to 2/000 (SH: C/O B/Wall at Rd. 0/790 to 0/830).	396821/-	8000/-	One month	Rs.350/-
63	C/O Okhroo Nehra via Keru road Km. 0/000 to 2/000 (SH: C/O Protection wall and Pucca path to village path between Rd. 1/480 to 1/496.50 and C/O both side wing wall at Rd. 0/495 & catch pit at Rd. 0/690) Balance work.	499655/-	10000/-	One month	Rs.350/-
64	R/R damages on Ghanahatti Nehra Bhukoo road Km. 0/00 to 8/00 (SH: C/O B/Wall at Rd. 5/720 to 5/738).	495970/-	10000/-	One month	Rs.350/-
65	R/R damages on Ghanahatti Nehra Bhukoo road Km. 0/00 to 8/00 (SH: C/O B/Wall at Rd. 5/570 to 5/580).	369801/-	7000/-	One month	Rs.350/-
66	R/R damages on Gharog Nalta road Km. 0/00 to 7/00 (SH: C/O R/Wall at Rd. 1/730 to 1/738.90).	494984/-	10000/-	One month	Rs.350/-
67	Improvement of curves on Galog Nehra Okhroo road Km. 0/00 to 12/00 (SH: Curve cutting in various Rds. 8/940 to 9/015 & 9/100 to 9/160).	489482/-	10000/-	One month	Rs.350/-
68	R/R damages on Ghanahatti Nehra Bhukoo road Km. 0/00 to 8/00 (SH: C/O R/Wall at Rd. 5/735 to 5/751).	458295/-	10000/-	One month	Rs.350/-
69	R/R damages on various roads under sub division Dhami (SH: Removal of slips, cleaning of drains, dressing of berms at various Rds.).	493016/-	10000/-	One month	Rs.350/-

70	C/O Devidhar Ambri Sheedal road Km. 0/000 to 3/510 (SH: C/O R/Wall at Rd. 2/586 to 2/592.50 & 2/592.50 to 2/599).	195981/-	4000/-	One month	Rs.350/-
71	C/O link road from Daud to Neen Km. 0/000 to 1/00 (SH: Formation cutting 5/7 mtr. at Rd. 0/360 to 0/400 and 0/535 to 0/580).	199010/-	4000/-	One month	Rs.350/-
72	C/O road from Jalog Gadheri to village Kandharti Ojdu Shaw Seri Km. 0/00 to 1/330 (SH: C/O R/Wall at Rd. 0/260 to 0/274.10).	440073/-	10000/-	One month	Rs.350/-
73	C/O road from Jalog Gadheri to village Kandharti Ojdu Shaw Seri Km. 0/00 to 1/330 (SH: C/O R/Wall at Rd. 0/244.90 to 0/259).	439313/-	10000/-	One month	Rs.350/-
74	C/O road from Jalog Himri to village Jhuntu Km. 0/00 to 1/150 (SH: C/O R/Wall at Rd. 0/515 to 0/529.10) Under BASP Head.	439693/-	10000/-	One month	Rs.350/-
75	C/O road from Jalog Himri to village Jhuntu Km. 0/00 to 1/150 (SH: C/O R/Wall at Rd. 0/500 to 0/514.10) Under BASP Head.	440073/-	10000/-	One month	Rs.350/-
76	R/R damages on Shimla Nalagarh road Km. 7/00 to 22/00 (SH: C/O B/Wall at Rd. 12/050 to 12/062).	292308/-	6000/-	One Month	Rs. 350/-
77	R/R damages on link road Hiranagar to Upperli Fathechi road Km. 0/00 to 0/780 (SH: C/O B/Wall in between Km. 0/260 to 0/275).	387120/-	8000/-	One month	Rs.350/-
78	R/R damages on link road Hiranagar to Upperli Fathechi road Km. 0/00 to 0/780 (SH: C/O R/Wall in between Km. 0/735 to 0/0748).	499549/-	10000/-	One month	Rs.350/-
79	R/R damages on Shoghi Salana Sari road Km. 0/00 to 12/200 (SH: Removal of slips at various Rds.).	495850/-	10000/-	One month	Rs.350/-
80	R/R damages on various roads under Shoghi sub division (SH: Removal of slips at various roads & various Rds.).	479155/-	10000/-	One month	Rs.350/-
81	C/O Devidhar Ambri Sheedal road Km. 0/000 to 3/510 (SH: C/O Wire crate R/Wall at Rd. 3/150 to 3/165).	463823/-	10000/-	One month	Rs.350/-
82	R/R damages on Chaba Makarcha road Km. 0/00 to 1/500 (SH: C/O R/Wall at Rd. 0/570 to 0/585).	250164/-	7600/-	One month	Rs.350/-
83	Balance work G.M.S. building Anu Tehsil Sunni, Distt. Shimla H.P. (SH: Providing, Painting,Plastering and finishing works thereof).	409894/-	10000/-	One month	Rs.350/-
84	R/R damages on link road Hiranagar to Upperli Fathechi road Km. 0/00 to 0/780 (SH: C/O R/Wall in between Km. 0/480 to 0/493).	499549/-	10000/-	One month	Rs.350/-
85	R/R damages on link road Hiranagar to Upperli Fathechi road Km. 0/00 to 0/780 (SH: C/O R/Wall in between Km. 0/755 to 0/768).	498903/-	10000/-	One month	Rs.350/-

Followings documents should be attached with the application for tenders:-

- The Contractors are requested to be produced a copy of their PAN No. GST No. copy of enlistment renewed letter and EPF certificate alongwith FDR against earnest money.
- Special care would be taken to write the rates both in figures and in word failing which tender is likely to be rejected.

**Executive Engineer
Shimla Rural Division
H.P.P.W.D. Dhmi**

Certificate

Certified that the tenders called vide this notice inviting tender for 85 (Eighty five) jobs are due to exigencies/emergency of works in the larger public interest.

**Executive Engineer
Shimla Rural Division
H.P.P.W.D. Dhmi.**

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Link Road to Airport Km. 0/00 to 1/150 (Sh: Construction of R-wall at Rd. 0/194.40 to 0/201.90)

Estimated Cost - Rs 486564 /- only
Earnest Money - Rs 10000 /- only
Time - One Month

S. No.	Sub head and items of work	Qty.	Cum	Rate figures	Unit	Amount
1	2	3	4	5	6	7
1	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix) Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	101.40		4600.00 Rupees Four Thousand Six Hundred Only	Per cubic metre	466440.00
2	Providing weaphokes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full width of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge	44.10		170.00 Rupees One Hundred Seventy Only	Per Running Metre	7497.00
3	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204, 3, 8, (i) Granular material. Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge	15.00		841.80 Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	12627.00
0					Total:	486564.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla Rural Division
HPPWD, Dhambi

SCHEDULE OF QUANTITY

Name of work :- Restoration of rain damages on Badheri Shilly & Jadhani Road under Jutogh Sub Division (Sh: Hiring of JCB for removal of Slips)

Estimated Cost : - Rs 295650 /- only
Earnest Money : - Rs. 6000 /-only

Time : -

One Month

S. No.	Sub head and items of work	Qty.	Unit	Rate		Amount
				figures	figures	
1	Hiring of excavator Cum loader for removal of slips including cost of fuel oil lubricants, wages of operational staff any repair during operation will be carried out at his own risk, cost including carriage of machinery from one place to another at required location. Actual working hours will be accounted for payment and proper disposal of slips will be insured by the contractor and including all leads and lifts & work shall be executed as per the direction of Engineer-in-Charge.	270.00	Hour	1095.00	Rupees One Thousand Ninety Five Only	295650.00
0						Total: 295650.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla/Rural Division
HPPWD, Dhamsi

Schedule Of Quantity

Estimated Cost:- 4,28,789.00


Name Of Work :- R/R Damages on Asia The Down To Chakkar raod km. 0/00 to 1/790 (SH:- Construction of Retaining wall at Rd. 0/525 to 0/534.70) (Balance work)

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	18.81	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	4390
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	34.14	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	12171
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 40mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	81.87	Cum	4800.00	Rupees Four Thousand Eight Hundred Only	Per cubic metre	392976

4	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (V):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7	42.00	Rmt.	190.00	Rupees One Hundred Ninety Only	Per running Metre	7980
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I.Including carriage of material within all leads and lifts.	13.39	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	11272
Total Rs.							428789
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dharmi. 

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Hirangar Sharog Road Km. 0/00 to 10/00 (Construction of Breast Wall and Edging at RD. 3/000 to 3/013.50)

Estimated Cost - Rs 388323/- only
Earnest Money - Rs 8000/-only
Time - One Month

S. No.	Sub head and items of work	Qty.	Rate		Unit	Amount	
			figures	5			
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORDD specification directed by Engineer-in-Charge.	20.25	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	4726.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORDD specification directed by Engineer-in-Charge.	14.04	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	5005.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	81.63	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	375498.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full width of the structures with slop of 1(V):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	18.20	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	3094.00
0						Total:	388323.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.


 Executive Engineer
 Shimla Rural Division
 HPPWD, Dhami

SCHEDULE OF QUANTITY
Name of Work:- Annual Repair & Maintenance of Hiranagar Sharog Road Km. 0/00 to 5/00 (Sh: Construction of R-wall at Rd. 3/070 to 3/080)

Estimated Cost - Rs 387971 /- only
 Earnest Money - Rs 8000 /-only
 Time - One Month

S. No.	Sub head and items of work	Qty.	Rate		Unit	Amount
			figures	5		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORFD specification directed by Engineer-in-Charge.	14.40	Cum	233.40	Per cubic metre	3361.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORFD specification directed by Engineer-in-Charge.	19.52	Cum	356.50	Per cubic metre	6959.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	79.56	Cum	4600.00	Per cubic metre	365976.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full width of the structures with slop of 1(V):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	15.20	Rmt.	170.00	Per Running Metre	2584.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	10.80	Cum	841.80	Per cubic metre	9091.00
0					Total:	387971.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
 Shimla Rural Division
 HPPWD, Dhamsi

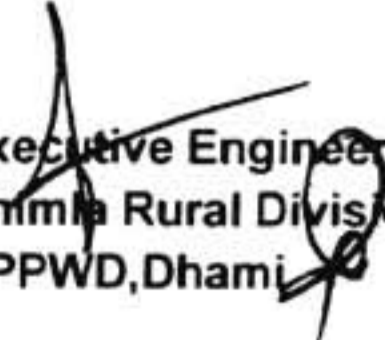
SCHEDULE OF QUANTITY

Name of Work:- Annual Repair & Maintenance of Hirangar Sharog Road Km. 0/00 to 5/00 (Sh: Construction of R-wall at Rd. 2/930 to 2/938.85) Estimated Cost - Rs 397859 /- only
 Earnest Money : - Rs. 8000 /-only
 Time: - One Month

S. No.	Sub head and items of work	Qty.	Rate		Unit	Amount
			4	5		
1	2	3	4	5	6	7
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	16.52 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	3856.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	10.32 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	3679.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	82.80 Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	380880.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	40.30 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	6851.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	3.08 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	2593.00
0					Total:	397859.00

Amount Quoted by the Contractor in Percentage		Rs.
--	--	------------

Note : (i) All the material will procured by the contractor him self.


 Executive Engineer
 Shimla Rural Division
 HPPWD, Dhamsi

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Chailly Khurd Road Km. 0/00 to 1/300 (Sh: Construction of R-wall at Rd. 0/460 to 0/465)

Estimated Cost - Rs 195277 /- only
Earnest Money - Rs 4000 /-only
Time - One Month

S. No.	Sub head and items of work	Qty.	Rate		Unit	Amount
				figures		
1	2	3	4	5	6	7
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	7.20 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	1680.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	9.76 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	3479.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm (Twenty milimeter) nominal mix including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	39.78 Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	182988.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	15.20 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	2584.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	5.40 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	4546.00
0					Total:	195277.00

Amount Quoted by the Contractor in Percentage					Rs.
--	--	--	--	--	------------

Note : (i) All the material will procured by the contractor him self.

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhamsi

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Chailly Khurd Road Km. 0/00 to 1/300 (Sh: Construction of R-wall at Rd. 0/410 to 0/422)
 Estimated Cost : - Rs 469514 /- only
 Earnest Money : - Rs. 9000 /-only
 Time: - One Month

S. No.	Sub head and items of work	Qty.	Rate		Unit	Amount
			figures	figures		
1	2	3	4	5	6	7
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	17.28 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	4033.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	23.42 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	8349.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm (Twenty milimeter) nominal mix including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	95.46 Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	439116.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full width of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	41.80 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	7106.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	12.96 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	10910.00
0					Total:	469514.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhani

Schedule Of Quantity

Estimated Cost:- 2,63,724.00

Name of Work :- A/R & M/O to AE office building at Shoghi (Pw Residential- 4216) (SH:- Painting and polishing & distempering etc.)

Earnest Money:- 5,300.00

Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Removing of old paint or polish from wood & wood based surfaces with paint remover of approved brand and manufacturer complete.including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	66.87	Sqm.	10.00	Rupees Ten Only	Per Square metre	669
2	Painting one Coat on previously painted wood and wood base surfaces. including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	81.03	Sqm.	80.00	Rupees Eighty Only	Per Square metre	6483
3	Polishing Two coat with melamine polish of required shade. including cleaning the surface of all dirt, dust, and sand papered smooth and including a coat of wood filler.	52.71	Sqm.	230.00	Rupees Two Hundred Thirty Only	Per Square metre	12123
4	Painting one Coat on previously painted steel and other metal surfaces. including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	65.76	Sqm.	105.00	Rupees One Hundred Five Only	Per Square metre	6905
5	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete.including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	382.80	Sqm.	10.00	Rupees Ten Only	Per Square metre	3828
6	Wall painting (one or more coat) with plastic emulsion paint of approved brand and manufacture on undecorated wall, having VOC (Volatile Organic Compound) content less than 50 grams/litre of approved brand and manufacture, including applying additional coats wherever required to achieve even shade and colour. including carriage of materials in all leads and lifts	765.57	Sqm.	130.00	Rupees One Hundred Thirty Only	Per Square metre	99524
7	Finishing wall with weather proof exterior grade emulsion of approved design (Apexultima) or its equivalent on undecorated wall surfaces (two coats) to give an even shade and final finish after thoroughly cleaning the surface to remove all dirt, dust and other foreign matter etc including sand paper smooth complete. including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	171.84	Sqm.	140.00	Rupees One Hundred Forty Only	Per Square metre	24058
8	Providing and fixing M.S. BP Sheet 2.00 mm(Two milimetre) to 2mm (Two milimetre) thick in eves board/ facia/soffit/ceiling including cutting ,fixing and welding to steel roof members and applying a coat of red lead primer complete as per direction of the Engineer-in-Charge including carriage of materials within all leads, lifts and other incidentals	23.50	Sqm.	1750.00	Rupees One Thousand Seven Hundred Fifty Only	Per Square metre	41125

9	Providing and fixing PVC plain bend ISI marked including fixing with approved adhesive etc. complete as per HP. PWD. specifications of 1990 volume-I including carriage of materials, labour, tool and plant through all modes of transportation within all leads and lifts and as per direction of Engineer-in- Charge. 110mm dia	6.00	No.	270.00	Rupees Two Hundred Seventy Only	Each	1620
10	Providing and fixing high pressure PVC spigot and socket, waste and ventilating pipes ISI marked including fitting with approved adhesive etc. complete including carriage of materials within all leads and lifts:-110mm dia.	20.00	Rmt.	350.00	Rupees Three Hundred Fifty Only	Per Running metre	7000
11	Steel work welded in built up sections/ framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works including carriage of material in all leads and lifts as per direction of the Engineer in Charge	306.00	Kg.	115.00	Rupees One Hundred Fifteen Only	Per Killogram	35190
12	Providing and fixing Plain/coloured polycarbonate transparent sheet 1.20 mm thick in foofing and lining with self drilling screws along with washers etc. complete with all accessories as required to complete the work in all leads and lifts as per direction of Engineer-in-charge	9.00	Sqm.	2800.00	Rupees Two Thousand Eight Hundred Only	Per Square metre	25200
Total Rs.							263724
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							


Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhamsi.

Schedule Of Quantity						Estimated Cost:- 1,35,615.00	
Name of Work :- A/R & M/O to AE office building at Shoghi (NR-4059) (SH:- Painting and polishing & distempering etc.)						Earnest Money:- 2,800.00	
						Time:- One Months.	
S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Removing of old paint or polish from wood & wood based surfaces with paint remover of approved brand and manufacturer complete.including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	148.20	Sqm.	10.00	Rupees Ten Only	Per Square metre	1482
2	Painting one Coat on previously painted wood and wood base surfaces. including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	207.58	Sqm.	70	Rupees Seventy Only	Per Square metre	14531
3	Polishing one or more coats with french polish on new wood and wood based surfaces to give an even surface including cleaning the surface of all dirt, dust, and sand papered smooth and including a coat of wood filler.	44.41	Sqm.	230	Rupees Two Hundred Thirty Only	Per Square metre	10214
4	Painting one Coat on previously painted steel and other metal surfaces. including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	54.20	Sqm.	105	Rupees One Hundred Five Only	Per Square metre	5691
5	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete.including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	277.10	Sqm.	10	Rupees Ten Only	Per Square metre	2771
6	Repairs to plaster of thickness 12 mm to 20 mm in patches of area 2.5 sq. meters and under, including cutting the patch in proper shape, raking out joints and preparing and plastering the surface of the walls complete, including disposal of rubbish to the dumping ground, all complete as per direction of Engineer-in-Charge. With cement mortar 1:4 (1 cement 4 fine sand	14.95	Sqm.	235	Rupees Two Hundred Thirty Five Only	Per Square metre	3513
7	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete. including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	14.95	Sqm.	60	Rupees Sixty Only	Per Square metre	897
8	Wall painting (one or more coat) with plastic emulsion paint of approved brand and manufacture on undecorated wall, having VOC (Volatile Organic Compound) content less than 50 grams/litre of approved brand and manufacture, including applying additional coats wherever required to achieve even shade and colour. including carriage of materials in all leads and lifts	554.21	Sqm.	130	Rupees One Hundred Thirty Only	Per Square metre	72047
9	Finishing wall with weather proof exterior grade emulsion of approved design (Apexultima) or its equivalent on undecorated wall surfaces (two coats) to give an even shade and final finish after thoroughly cleaning the surface to remove all dirt, dust and other foreign matter etc including sand paper smooth complete. including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	169.59	Sqm.	140	Rupees One Hundred Forty Only	Per Square metre	23743

10	Painting Two Coat on cast iron pipe. including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	6.91	Sqm.	105	Rupees One Hundred Five Only	Per Square metre	726
Total Rs.							135615
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhamsi. *[Signature]*

Schedule Of Quantity						Estimated Cost:- 4,31,119.00	
Name of Work :- A/R & M/O on Shakoh to Hanuman Mandir road 0/00 to 1/250 (SH:- Construction of wing wall at Rd. 0/150) (Balance work)						Earnest Money:- 9,000.00	
						Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side,water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shallbe carried,out true tolines,grades,side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	15.74	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	3674
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	33.43	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	11918
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand :8 graded stone aggregate 20 mm nominal size) and curing complete including the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes inputfor or output by this contract shall be payable by the contractor and Government shall not entetain any claim whatsoever in this respect of the same.	85.64	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	393944
4	Back filling filling behind abutment wing wall and retaning wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I.Including carriage of material within all leads and lifts.	15.37	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	12938
5	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7 Including carriage of material within all leads and lifts.	45.50	Rmt.	190.00	Rupees One Hundred Ninety Only	Per Running Metre	8645
Total Rs.							431119
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhamsi 

SCHEDULE OF QUANTITY

Name of Work:- Annual Repair & Maintenance of Galog Nehra Okhroo Road Km. 0/00 to 11/135 (Sh: Construction of R-walls at Rds. 5/770 to 5/785)					Estimated Cost: - Rs 491459 /- only Earnest Money : - Rs. 10000 /-only Time: - One Month		
S. No.	Sub head and items of work	Qty.	Rate figures		Unit	Amount	
1	2	3	4	5	6	7	
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in-Charge.	11.34 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	2647.00	
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	40.41 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	14406.00	
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm (Twenty millimeter) nominal mix . Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	98.50 Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	453100.00	
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	15.98 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per Running Metre	13452.00	
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	46.20 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	7854.00	
0					Total:	491459.00	
Amount Quoted by the Contractor in Percentage					Rs.		

Note : (i) All the material will procured by the contractor him self.

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhamsi

Schedule Of Quantity

Name of Work :- S/R to District Court Complex at Chakker Shimla (SH:- Providing & painting, distemping, ACP sheet ceiling, steel work and sanitary installation in District Court Complex Block A&B)

Estimated Cost:- 4,99,708.00

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
		3	4	In figures	In words		
1	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	219.26	Sqm	10.00	Rupees Ten Only	Per Square metre	2193
2	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete. including carriage of materials with in all leads and lifts and as per the direction of Engineer in Charge.	219.26	Sqm	60	Rupees Sixty Only	Per Square metre	13156
3	Wall painting (one or more coat) with plastic emulsion paint of approved brand and manufacture on undecorated wall, having VOC (Volatile Organic Compound) content less than 50 grams/litre of approved brand and manufacture, including applying additional coats wherever required to achieve even shade and colour. including carriage of materials in all leads and lifts	219.26	Sqm	99	Rupees Ninety Nine Only	Per Square metre	21707
4	Painting wood work with Deluxe Multi Surface Paint of required shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @0.75 ltr/10 sqm of approved brand and manufacture. including carriage of materials with in all leads, lifts and other incidentals.	14.36	Sqm	90	Rupees Ninety Only	Per Square metre	1292
5	Painting Steel work with Deluxe Multi Surface Paint to give an even shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @ 0.80 ltr/10 sqm of approved brand and manufacture. including carriage of materials with in all leads, lifts and other incidentals.	26.46	Sqm	65	Rupees Sixty Five Only	Per Square metre	1720
6	Steel work in built up tubular (round square or rectangular hollow tubes etc.) trusses etc. including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc complete.	52.22	Kg.	105	Rupees One Hundred Five Only	Per Killogram	5483
7	Steel work welded in built up sections/ framed work, including cutting hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. As per required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works complete including carriage of material in all leads and lifts as per direction of the Engineer in charges.	327.18	Kg.	105	Rupees One Hundred Five Only	Per Killogram	34354
8	Providing and fixing oxidized M.S. sliding door bolts with nuts and screws etc. complete. 250 x 16 mm. including carriage of materials, labour, tool and plant through all modes of transportation within all leads and lifts and as per direction of Engineer-in- Charge	1.00	No	170	Rupees One Hundred Seventy Only	Each	170

9	Providing and fixing M.S. tower bolts (barrel type) with necessary screws etc. complete. including carriage of materials, labour, tool and plant through all modes of transportation within all leads and lifts and as per direction of Engineer-in-Charge	1.00	No	60	Rupees Sixty Only	Each	60
10	Providing and fixing oxidized M.S. handles with the necessary screws etc. complete. 125 mm including carriage of materials, labour, tool and plant through all modes of transportation within all leads and lifts and as per direction of Engineer-in-Charge	2.00	No	70	Rupees Seventy Only	Each	140
11	Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing / paneling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge. (Glazing, paneling and dash fasteners to be paid for separately) : For fixed portion Powder coated aluminium (minimum thickness of powder coating 50 micron) including carriage of material within all leads and lifts	150.48	Kg.	680	Rupees Six Hundred Eighty Only	Per Killogram	102326
12	For shutters of doors, windows & ventilators including providing and fixing hinges/ pivots and making provision for fixing of fittings wherever required including the cost of EPDM rubber / neoprene gasket required (Fittings shall be paid for separately) Powder coated aluminium (minimum thickness of powder coating 50 micron) including carriage of material within all leads and lifts	142.50	Kg.	690	Rupees Six Hundred Ninety Only	Per Killogram	98394
13	Providing & fixing 4 mm thick laminated Aluminium Composite panel (ACP SHEETS) in panelling fixed in aluminium doors, windows sutters and partition frames with C.P brass / stainless steel screws etc. complete as per architectural drawings and direction of Engineer in Charge.	6.57	Sqm	2200	Rupees Two Thousand Two Hundred Only	Per Square metre	14454
14	Providing and fixing glazing in aluminium door, window, ventilator shutters and partitions etc. with EPDM rubber / neoprene gasket etc. complete as per the architectural drawings and the directions of engineer-in-charge (Cost of aluminium snap beading shall be paid in basic item):With float glass panes of 5 mm thickness (weight not less than 12.50 kg/sqm	9.39	Sqm	1250	Rupees One Thousand Two Hundred Fifty Only	Per Square metre	11738
15	Providing and fixing aluminium extruded section body tubular type universal hydraulic door closer (having brand logo with ISI, IS : 3564, embossed on the body, door weight upto 36 kg to 80 kg and door width from 701 mm to 1000 mm), with double speed adjustment with necessary accessories and screws etc. complete. including carriage of materials within all leads and lifts and as per the direction of Engineer-in-Charge.	8.00	No	4500	Rupees Four Thousand Five Hundred Only	Each	36000
16	Providing and fixing bright finished hydraulic door closer of Godraj make or equivalent with screws etc. complete including carriage of materials in all leads and lifts.	7.00	No	2200	Rupees Two Thousand Two Hundred Only	Each	15400

17	Providing and fixing aluminum handles, ISI marked, anodised (anodic coating not less than Grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge. 125mm.	6.00	No	180	Rupees One Hundred Eighty Only	Each	1080
18	Providing and fixing aluminum tower bolts, ISI marked, anodised (anodic coating not less than Grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge. :200mm x 10mm.	4.00	No	95	Rupees Ninety Five Only	Each	380
18:01	150 x 10mm	5.00	No	75	Rupees Seventy Five Only	Each	375
19	Providing and fixing 5mm thick frosted glass of superior quality and make including carriage of materials in all leads and lifts.	2.13	Sqm	1500	Rupees One Thousand Five Hundred Only	Per Square metre	3195
20	Providing and fixing of wire Mesh fly proof of approved brand at DDU Zonal Hospital Shimla for 24 hours on urgent basis as per direction of Engineer in Charge.	1.80	Sqm	650	Rupees Six Hundred Fifty Only	Per Square metre	1170
21	Providing and fixing in position collapsible steel shutters with vertical channels 20x10x2 mm and braced with flat iron diagonals 20x5 mm size, with top and bottom rail of T-iron 40x40x6 mm, with 40 mm dia steel pulleys, complete with bolts, nuts, locking arrangement, stoppers, handles, including applying a priming coat of approved steel primer.including carriage of materials with in all leads, lifts and other incidentals.	4.03	Sqm	7800	Rupees Seven Thousand Eight Hundred Only	Per Square metre	31434
22	Providing and placing on terrace (at all floor levels) polyethylene water storage tank, IS : 12701 marked, with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank.	6.00	No	8000	Rupees Eight Thousand Only	Each	48000
23	Providing and fixing 25mm dia nominal bore G.I. pipes complete with G.I. fittings including trenching and refilling etc. External work	37.30	Rmt.	475	Rupees Four Hundred Seventy Five Only	Per Running Metre	17718
24	Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end) including carriage of materials within all leads and lifts 25mm nominal bore.	3.00	No	750	Rupees Seven Hundred Fifty Only	Each	2250
25	Providing and Supplying G.I. elbow 25 mm dia of approved brand including carriage of materials within all leads and lifts.	2.00	No	350	Rupees Three Hundred Fifty Only	Each	700
26	Providing and Supplying G.I. union 25mm dia including carriage of materials within all leads and lifts.	2.00	No	250	Rupees Two Hundred Fifty Only	Each	500
27	Providing and fixing brass ball valve (horizontal plunger type) High pressure with polythene plastic floats 25mm nominal bore including carriage of materials within all leads and lifts 25mm dia.	6.00	No	650	Rupees Six Hundred Fifty Only	Each	3900
28	Providing and fixing 8 mm dia C.P. / S.S. Jet with flexible tube upto 1 metre long with S.S. triangular plate to European type W.C. of quality and make as approved by Engineer - in - charge	2.00	No	550	Rupees Five Hundred Fifty Only	Each	1100

29	Providing and fixing 15mm nominal bore C.P. brass angle cock of approved quality conforming to IS:8931 complete including carriage of materials within all leads and lifts.	2.00	No	1125	Rupees One Thousand One Hundred Twenty Five Only	Each	2250
30	Providing and fixing toilet paper holder complete as per HP. PWD. specifications of 1990 volume-I including carriage of materials, labour, tool and plant through all modes of transportation within all leads and lifts and as per direction of Engineer-in-Charge a) C.P. Brass	2.00	No	1425	Rupees One Thousand Four Hundred Twenty Five Only	Each	2850
31	Providing and fixing 15mm dia C.P. Brass bib cock of approved quality including carriage of material in all leads and lifts as per direction of the Engineer in Charge	1.00	No	850	Rupees Eight Hundred Fifty Only	Each	850
32	Providing and rising 30 cm length uplasticised PVC connection pipe with brass unions 15 mm nominal bore complete including carriage of materials upto all leads and lifts and as directed by the Engineer in Charge	2.00	No	150	Rupees One Hundred Fifty Only	Each	300
33	Providing & fixing 100mm dia C.P. grating for floor or nahani / gully / floor trap including carriage of material within all leads and lifts.	2.00	No	95	Rupees Ninety Five Only	Each	190
34	Providing and fixing white vitreous china flat back or wall corner type lipped front urinal basin of 430x260x350 mm and 340x410x265 mm sizes respectively with automatic flushing cistern with standard flush pipe and C.P. brass spreaders with brass unions and G.I clamps complete, including painting of fittings and brackets, cutting and making good the walls and floors wherever required : Range of three urinal basins with 10litre white P.V.C. automatic flushing cistern including carriage of material upto all leads and lifts as per the direction of Engineer in Charge.	1.00	No	6750	Rupees Six Thousand Seven Hundred Fifty Only	Each	6750
35	Providing and fixing high pressure PVC spigot and socket, waste and ventilating pipes ISI marked including fitting with approved adhesive etc. complete including carriage of materials within all leads and lifts:- 110mm dia. Mm	3.00	Rmt.	650	Rupees Six Hundred Fifty Only	Per Running metre	1950
36	Providing and supplying dustbin Cello make with out pad large bucket type including carriage of materials within all leads and lifts:-	2.00	No	1590	Rupees One Thousand Five Hundred Ninety Only	Each	3180
37	Providing and supplying Sanitary Napkin Vending machine of approved brand including carriage of materials within all leads and lifts:-	2.00	No	5500	Rupees Five Thousand Five Hundred Only	Each	11000
Total Rs.							499708
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dhamsi

Schedule Of Quantity

**Name Of Work :- Restoration of Rain damges on Anandpur to Tara Devi Temple road
km. 0/00 to 2/200 (SH:- Removal of Slips at various Rds.)**

Estimated Cost:- 4,35,367.00

Earnest Money:- 8,800.00

Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		In words		Unit	Amount
				In figures					
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611. The rate including octroi, royalty, Malkana toll tax, GST or any other taxes inputfor or output by this contract shall be payable by the contractor and Government shall not entetain any claim whatsoever in this respect of the same.	3	4	90.00		Rupees Ninety Only	6	Per cubic metre	8 485367
Total Rs.									485367
Amount Quoted by the Contractor in Percentage									
Note :- All the material will procured by the contractor him self									

Executive Engineer,
 Shimla Rural Division,
 HP, PWD, Dharm: *Boya*

Schedule Of Quantity

Name Of Work :- Restoration of rain Damages on Shoghi Mehli road km. 0/00 to 12/375
(SH:- Construction of R/wall at Rd. 4/390 to 4/402)

Estimated Cost:- 3,15,556.00

Earnest Money:- 6,400.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited) all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings including carriage of material within all leads and lifts.	3	4	5	6	7	8
		7.56	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	1755
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of slumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth including carriage of material within all leads and lifts	28.44	Cum	355.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	10139
3	Providing and laying cement concrete 1 4 8 (1 cement 4 Sand 8 graded stone aggregate 20 mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth, including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	61.49	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	282354
4	Providing weepholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pipe extending through the full width of the structures with slope of 1 in 20(H) towards drawing face complete as per drawing and technical specification clauses 614.709, 1204.3.7	34.50	Rmt	190.00	Rupees One Hundred Ninety Only	Per running Metre	6555
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP PWD, specifications of 1990 volume- including carriage of material within all leads and lifts	16.92	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	14243
Total Rs.							315556
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
 Shimla Rural Division,
 HP, PWD, Dhampur.

Schedule Of Quantity

Name Of Work :- Restoration of rain Damages on TaraDevi Gamber road km. 0/00 to 11/550 (SH:- Construction of wing wall at Rd. 2/00) (Balance work RHS)

Estimated Cost:- 2,05,429.00

Earnest Money:- 4,200.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		In words	Unit	Amount
				In figures				
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	3	4	5	6	7	8	
		13.44	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	3137	
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	11.40	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	4064	
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 20 mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth, including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	41.51	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	190946	
4	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full width of the structures with slop of 1 (V):20(H) towards drawing face complete as per drawing and technical specification clauses 614.709.1204.3.7	14.40	Rmt.	190.00	Rupees One Hundred Ninety Only	Per running Metre	2736	
5	Back filling filling behind abutment; wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-1. Including carriage of material within all leads and lifts.	5.40	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	4546	
Total Rs.							205429	
Amount Quoted by the Contractor in Percentage								
Note :- All the material will procured by the contractor him self								

Executive Engineer,
 Shimla Rural Division,
 HP, PWD, Dhamsi.

Schedule Of Quantity						Estimated Cost:- 3,71,540.00	
Name Of Work :- Restoration of rain Damages on Shoghi Mehli road km. 0/00 to 12/375 (SH:- C/O Edge wall along with parapets at Rd. 9/940 to 9/976						Earnest Money:- 7,500.00	
						Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
		3	4	In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	19.80	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	4621
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	26.19	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	9337
3	Providing and laying cement concrete drain with cement concrete 1:3:6 (one cement : 3 sand : 6 graded stone aggregate 20 mm nominal size) mechanically mixed in open surface drain with plinth protection having internal size 20x15 cm & with side wall of 10 cm thick & inside plastering with CM. 1:3 including earthwork & finished with floating coat of neat cement complete as per standard design as per HPPWD specification 1990 volume - I including carriage of all labour equipments and materials to various location through complete including carriage of material in all leads and lifts as per direction of Engineer in Charge.	64.39	Cum	5200.00	Rupees Five Thousand Two Hundred Only	Per cubic metre	334828
4	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full width of the structures with slop of 1 (v) 20(H) towards drawing face complete as per drawing and technical specification clauses 614.709 1204 3.7	43.20	Rmt.	190.00	Rupees One Hundred Ninety Only	Per running Metre	8208
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	17.28	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	14546
Total Rs.							371540
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dhamsi.

Schedule Of Quantity						Estimated Cost:- 4,97,453.00	
Name of Work :- Restoration of rain Damages on Anandpur to Anji Banari road km. 0/00 to 0/655 (SH:- C/O R/wall at Rd. 0/646 to 0/653.50)						Earnest Money:- 10,000.00	
						Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	32.85	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	7667
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	16.88	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	6018
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 20 mm nominal size) and curing complete including the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	102.60	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	471960
4	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	10.80	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	9091
5	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7 Including carriage of material within all leads and lifts.	14.30	Rmt.	190.00	Rupees One Hundred Ninety Only	Per Running Metre	2717
Total Rs.							497453
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhamsi

Schedule Of Quantity


Estimated Cost:- 4,99,270.00

Name Of Work :- Construction of Science and Creativity centre at village Bhog Anandpur Shoghi (Construction of Boundary wall a/w Planetarium (Balance work) Job No -2

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Steel work welded in built up sections/ framed work, including cutting hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. As per required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works complete including carriage of material in all leads and lifts as per direction of the Engineer in charges.	2989.93	Kg.	112.45	Rupees One Hundred Twelve and Paise Forty Five Only	per Kilogram	336218
2	Providing hard drawn steel wire fabric 75 x 25mm mesh and priming coat with approved steel primer coat complete within all leads and lifts and direction of Engineer in Charge.	101.25	Sqm	1292.15	Rupees One Thousand Two Hundred Ninety Two and Paise Fifteen Only	Per Square metre	130830
3	Painting Steel work with Deluxe Multi Surface Paint to give an even shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @ 0.80 ltr/10 sqm of approved brand and manufacture. including carriage of materials with in all leads, lifts and other incidentals.	291.60	Sqm	110.50	Rupees One Hundred Ten and Paise Fifty Only	Per Square metre	32222
Total Rs.							499270
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhamsi 

Schedule Of Quantity						Estimated Cost:- 4,99,681.00	
Name Of Work :- Construction of Science and Creativity centre at village Bhog Anandpur Shoghi (Construction of Boundary wall a/w Planetarium (Balance work)						Earnest Money:- 10,000.00	
						Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
		3	4	In figures	In words		
1	2	3	4	5	6	7	8
1	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	56.35	Cum	391.20	Rupees Three Hundred Ninety One and Paise Twenty Only	Per cubic metre	22044
2	Providing and laying cement concrete 1:2:4 (one cement: two sand: four graded stone aggregate twenty milimetre nominal size) and curing complete excluding the cost of form work in foundation and plinth and curing complete mechanical mixed and vibrated for compacting reinforced concrete as per HPPWD specification 1990 (one thousand Nine hundred Ninety) volume-I including carriage of materials ,labour ,tool and plants through all modes of transportation with in all leads and lifts, and as per direction of the Engineer-in-charge.	70.28	Cum	6300.00	Rupees Six Thousand Three Hundred Only	Per cubic metre	442764
3	Centering and shuttering including strutting, propping etc. and removal of form for Lintels, beams, plinth beams, girders, bressumers and cantilevers complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	74.12	Sqm	470.50	Rupees Four Hundred Seventy and Paise Fifty Only	Per Square metre	34873
Total Rs.							4,99,681
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhamsi.

Schedule Of Quantity

Estimated Cost:- 4,17,151.00

Name Of Work :- Construction of Science and Creativity centre at village Bhog Anandpur Shoghi (Construction of septic tank a/w Hostel Block)

Earnest Money:- 9,000.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	23.91	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	8524
2	Centering and shuttering including strutting, propping etc. and removal of form for Suspended floors, roofs, landing, balconies and access platform including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	9.25	Sqm	470.50	Rupees Four Hundred Seventy and Paise Fifty Only	Per Square metre	4352
2.2	Centering and shuttering including strutting, propping etc. and removal of form for Vertical walls (any thickness)	77.66	Sqm	495.00	Rupees Four Hundred Ninety Five Only	Per Square metre	38442
2.3	Centering and shuttering including strutting, propping etc. and removal of form for Edges of slabs and breaks in floors and walls under 20 cm. wide	12.90	Rmt.	130.00	Rupees One Hundred Thirty Only	Per Square metre	1677
3	Reinforced cement concrete work in beams, suspended floors, roofs having slope up to 15° landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases above plinth level up to floor five level, excluding the cost of centering, shuttering, finishing and reinforcement, with 1:1.5:3 (1 cement : 1.5 coarse sand) : 3 graded stone aggregate 20 mm nominal size).	7.94	Cum	7900.00	Rupees Seven Thousand Nine Hundred Only	Per cubic metre	62726
4	Providing Tor steel reinforcement for R.C.C. work including bending, binding and placing in position complete including cost of binding wire up to any level as per the directions of Engineer-in-Charge including carriage of materials with in all leads, lifts and other incidentals.	440.28	Kg.	110.00	Rupees One Hundred Ten Only	Per Killogram	48431
5	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in in Cement mortar 1:6 (1 cement: 6coarse sand) complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	18.46	Cum	7800.00	Rupees Seven Thousand Eight Hundred Only	Per cubic metre	143988
6	Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure in Cement mortar 1:4 (1 cement: 4 coarse sand) complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	7.40	Sqm	855.00	Rupees Eight Hundred Fifty Five Only	Per Square metre	6327

7	15mm cement plaster in single coat on fair side of brick/concrete/stone walls for interior plastering upto floor two level including arrises, internal rounded angles, chamfers and/or rounded angles not exceeding 80mm in girth and finished even and smooth Cement Mortar 1:6(1 cement : 6 sand) including entire carriage of materials in all leads and lifts.	45.64	Sqm	251.10	Rupees Two Hundred Fifty One and Paise Ten Only	Per Square metre	11460
8	Supplying cast iron cover with frame for manhole for frame of internal dimension 455 x 610 mm rectangular CI cover the weight of cover to be not less than 38 kg as per the direction of Engineer-in-charge including carriage of materials with in all leads, lifts and other incidentals.	1.00	No.	1502.20	Rupees One Thousand Five Hundred Two and Paise Twenty Only	Each	1502
9.01	Providing and fixing high pressure PVC spigot and socket, waste and ventilating pipes ISI marked including fitting with approved adhesive etc. complete including carriage of materials within all leads and lifts:-110mm dia. mm						
9.02	110 mm dia (One hundred ten) dia	60.00	Rmt.	389.70	Rupees Three Hundred Eighty Nine and Paise Seventy Only	Per running Metre	23382
10.01	Providing and fixing 110 mm (one hundred ten millimetre) dia PVC door bend with oval access door insertion rubber washer 3 mm Three millimetre) thick bolts and nuts ISI market complete including fixing with approved adhesive etc. complete as per the direction of Engineer-in-charge including carriage of materials with in all leads, lifts and other incidentals.						
10.02	110 mm dia (One hundred ten) dia	7.00	No.	350.00	Rupees Three Hundred Fifty Only	Each	2450
11	P/F PVC collers ISI marked I/C fixing with approved adhesive etc. complete as per HP. PWD. specifications of 1990 volume-I including carriage of materials, labour, tool and plant through all modes of transportation within all leads and lifts and as per direction of Engineer-in- Charge						
11.02	110 mm dia (One hundred ten) dia	14.00	No.	295.00	Rupees Two Hundred Ninety Five Only	Each	4130
12	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand :8 graded stone aggregate 20 mm nominal size) and curing complete excluding the cost of form workin Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes inputfor or output by this contract shall be payable by the contractor and Government shall not entetain any claim whatsoever in this respect of the same.	12.45	Cum	4800.00	Rupees Four Thousand Eight Hundred Only	Per cubic metre	59760
Total Rs.							417151
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhama

Schedule Of Quantity							Estimated Cost:- 4,97,000.00	
Name of Work :- A/R & M/O of PWD Rest House at Tara Devi Shimla (SH:- Supplying of drinking water in Rest House Tara Devi Shimla)							Earnest Money:- 10,000.00	
							Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount	
				In figures	In words			
1	2	3	4	5	6	7	8	
1	Supplying of potable drinking water for circuit house/ rest house/ old Rest house and office at Tara devi. The water should be clean, free from impurities for drinking purpose as per entire satisfaction and direction of Engineer in Charge i/c carries of materils/ labour, equipments and water to the various location, through all mode of transpurtation as per direction of Engineer in Charge.	710000.00	Liters	0.70	Rupees NIL and Paise Seventy Only	Per Liters	497000	
Total Rs.								497000
Amount Quoted by the Contractor in Percentage								
Note :- All the material will procured by the contractor him self								

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhamsi. *[Signature]*

Schedule Of Quantity						Estimated Cost:- 4,84,865.00	
Name of Work :- Construction of Okhroo Nehra Via Keru road 0/00 to 3/00 (SH:- Construction of Retainng wall at Rd. 0/968 to 0/987)						Earnest Money:- 10,000.00	
						Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried, out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	42.98	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	10032
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	31.96	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	11394
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 40mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	97.83	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	450018
4	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I.	11.46	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	9647

5	Providing weapholes in brick masonry/stone masonry plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7	22.20	Rmt.	170.00	Rupees One Hundred Seventy Only	Per running Metre	3774
Total Rs							484865
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhamsi. *Bm*

Schedule Of Quantity						Estimated Cost:- 2,99,214.00	
Name Of Work :- Construction of Gadheri to Touri road km. 0/00 to 0/645 (SH:- Construction of R/wall at Rd. 0/075 to 0/081.15, 0/115 to 0/124, & 0/124 to 0/133) (PCC)						Earnest Money:- 6,000.00	
						Time:- One Months.	
S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited) all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	18.75	Cum	199.00	Rupees One Hundred Ninety Nine Only	Per cubic metre	3731
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth including carriage of material within all leads and lifts.	4.47	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	1594
3	Providing and Laying concrete for plain/reinforcement concrete in open foundation and plinth complete as per drawing and Technical Specifications clause 802, 803, 1202 & 1203 for plain/ reinforcement including carnage of materials as per the direction of Engineer-In-Charge. Cement concrete 1:5:10 nominal mix (1 Cement . 5 sand . 10 graded crushed stones aggregate 40 nominal size)	70.71	Cum	4000.00	Rupees Four Thousand Only	Per cubic metre	282840
4	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (v) 20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204 3.7	20.00	Rmt.	190.00	Rupees One Hundred Ninety Only	Per running Metre	3800
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carnage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I Including carnage of material within all leads and lifts.	7.25	Cum	1000.00	Rupees One Thousand Only	Per cubic metre	7250
Total Rs.							299214
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dhama. *[Signature]*

Schedule Of Quantity

Estimated Cost:- 4,94,801.00

Name Of Work :- Restoration of Rain Damage on Bag to Kayalu road km. 0/00 to 10/500 (SH:- Construction of Breast wall at Rd. 6/655.70 to 6/664 , 6/664 to 6/672.30 & Retaining wall at Rd. 6/805 to 6/812 , 6/812 to 6/820 & 6/820 to 6/828)

Earnest Money:- 10,000.00

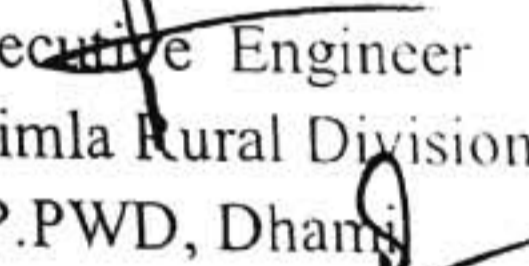
Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried, out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	17.14	Cum	199.00	Rupees One Hundred Ninety Nine Only	Per cubic metre	3411
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	9.79	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	3490
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 20 mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	93.64	Cum	5000.00	Rupees Five Thousand Only	Per cubic metre	468200
4	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full width of the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7	64.00	Rmt.	190.00	Rupees One Hundred Ninety Only	Per running Metre	12160
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	7.54	Cum	1000.00	Rupees One Thousand Only	Per cubic metre	7540
Total Rs.							494801
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dhama
[Signature]

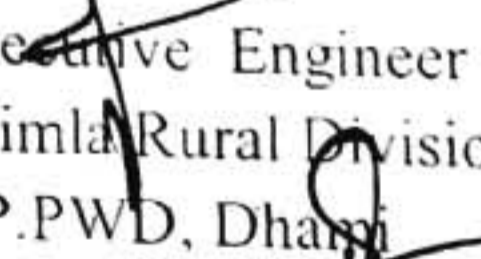
Schedule of Quantity

Name of Work:- RRD on Gallu to Palged road km 0/00 to 9/600(SH:-Removal of Land slide / Slips at various Rds between km 2/00 to 6/00)					Estimated Cost: 4,99,855/- only		
					Earnest Money: 10,000/-only.		
					Time: - One month		
S. No	Description of Work	Qty.		Rate		Unit	Amount
		3	4	In Figure	In word		
1	2	3	4	5	6	7	8
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in all kind of soil/ ordinary rock by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611 including all leads and lifts and work will be executed as per the direction of Engineer in charge.	2241.00	Per Cum.	223.05	Two Hundred Twenty Three Rupees Five Paise	Per Cum.	₹ 4,99,855.00
					Total		₹ 4,99,855.00
	Amount procured by the contractor in percentage						
	Conditions:- All the Machineries/materials will be procured by the contractor himself and bills will be submitted						


 Executive Engineer
 Shimla Rural Division
 HP.PWD, Dhami

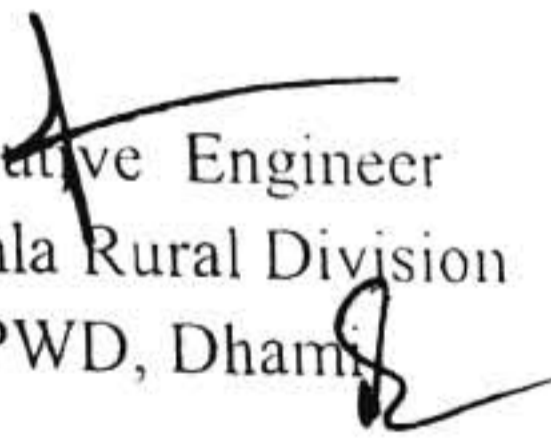
Schedule of Quantity

Name of Work:- RRD on Gallu to Palged road km 0/00 to 9/600(SH:-Removal of Land slide / Slips at various Rds between km 0/00 to 2/00)					Estimated Cost: 4,98,031/- only		
					Earnest Money: 10,000/-only.		
					Time: - One month		
S. No	Description of Work	Qty.		Rate		Unit	Amount
		3	4	In Figure	In word		
1	2	3	4	5	6	7	8
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in all kind of soil/ ordinary rock by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611 including all leads and lifts and work will be executed as per the direction of Engineer in charge.	2232.82	Per Cum.	223.05	Two Hundred Twenty Three Rupees Five Paise	Per Cum.	₹ 4,98,031.00
Amount procured by the contractor in percentage					Total		₹ 4,98,031.00
Conditions:- All the Machineries/materials will be procured by the contractor himself and bills will be submitted							


 Executive Engineer
 Shimla Rural Division
 HP.PWD, Dharam

Schedule of Quantity

Name of Work:- RRD on Bag to Kayalu road km 0/00 to 10/500(SH: Removal of Land slide / Slips at various Rds between km 0/00 to 10/500))					Estimated Cost: 4,98,550/- only		
					Earnest Money: 10,000/-only.		
					Time: - One month		
S. No	Description of Work	Qty.		Rate		Unit	Amount
		3	4	In Figure	In word		
1	2	3	4	5	6	7	8
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in all kind of soil/ ordinary rock by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611 including all leads and lifts and work will be executed as per the direction of Engineer in charge.	2235.15	Per Cum.	223.05	Two Hundred Twenty Three Rupees Five Paise	Per Cum.	₹ 4,98,550.00
					Total		₹ 4,98,550.00
	Amount procured by the contractor in percentage						
	Conditions:- All the Machineries/materials will be procured by the contractor himself and bills will be submitted						

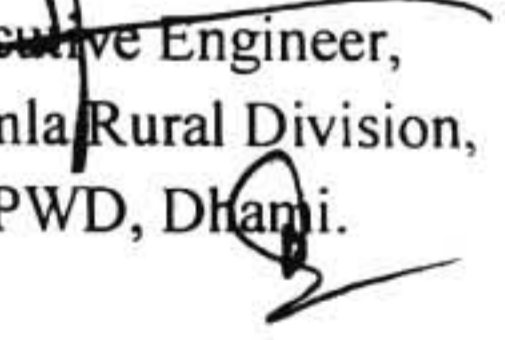

 Executive Engineer
 Shimla Rural Division
 HP.PWD, Dham

Schedule of Quantity

Name of Work:- R/R Damages on Kadharghat to Palag Serikedi km 0/00 to 7/030 (SH:- Removal of slips in various Rds) Km 0/00 to 2/900

Estimated Cost: - Rs 496052 /- only
Earnest Money :-10,000/- Only
Time:- One Month

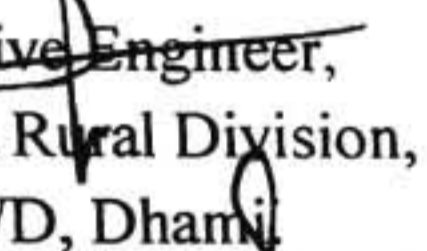
Sr. No.	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611. The rate including octroi, royalty, Malkana toll tax, GST or any other taxes inputfor or output by this contract shall be payable by the contractor and Government shall not entetain any claim whatsoever in this respect of the same.	2223.95	Cum	223.05	Rupees Two Hundred Twenty Three and Paise Five Only	Per Cubic metre	496052
Total							496052
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							


 Executive Engineer,
 Shimla Rural Division,
 HP,PWD, Dhani.

Schedule of Quantity

Name of Work:- R/R Damages on Kadharghat to Palag Serikedi km 0/00 to 7/030 (SH:- Removal of slips form 2/900 to 7/030)	Estimated Cost: - Rs 496594 /- only
	Earnest Money :-10,000/- Only
	Time:- One Month

Sr. No.	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611. The rate including octroi, royalty, Malkana toll tax, GST or any other taxes inputfor or output by this contract shall be payable by the contractor and Government shall not entetain any claim whatsoever in this respect of the same.	2226.38	Cum	223.05	Rupees Two Hundred Twenty Three and Paise Five Only	Per Cubic metre	496594
	Total						496594
	Amount Quoted by the Contractor in Percentage						
	Note :- All the material will procured by the contractor him self						


 Executive Engineer,
 Shimla Rural Division,
 HP,PWD, Dhani

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Airport Road Km. 0/00 to 1/150 (Sh:- Construction of R-wall at R.D. 0/187.20 to 0/194.40)

Estimated Cost: - Rs 493224 /- only
Earnest Money : - Rs. 10000 /-only
Time: - One Month

S. No.	Sub head and items of work	Qty.	Rate figures		Unit	Amount
			4	5		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	43.20 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	10083.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	33.12 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	11807.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm (Twenty milimeter) nominal mix including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	95.90 Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	441140.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	28.80 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	24244.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	35.00 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	5950.00
0					Total:	493224.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer,
Shimla Rural District,
H.P.W.D., Shimla

SCHEDULE OF QUANTITY

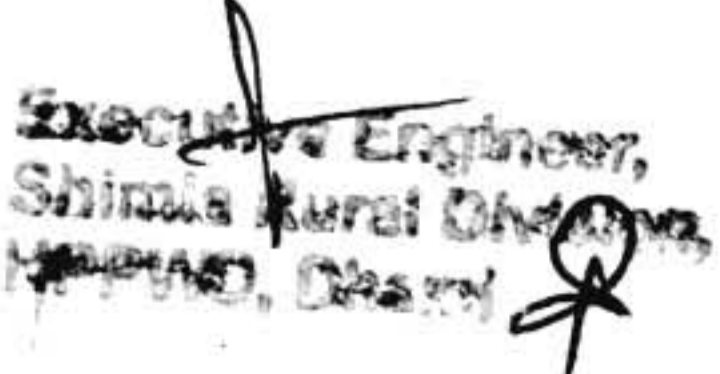
Name of Work:- Restoration of rain damages on Airport Road Km. 0/00 to 1/150 (Sh:- Construction of R-wall at R.D. 0/180 to 0/187.20)

Estimated Cost: - Rs 493394 /- only
Earnest Money : - Rs. 10000 /-only
Time: - One Month

S. No.	Sub head and items of work	Qty.	Rate figures		Unit	Amount
			3	4		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	43.20 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	10083.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	33.12 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	11807.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm (Twenty milimeter) nominal mix including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	95.90 Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	441140.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	28.80 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	24244.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	36.00 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	6120.00
0					Total:	493394.00

Amount Quoted by the Contractor in Percentage					Rs.
--	--	--	--	--	------------

Note : (i) All the material will procured by the contractor him self.


 Executive Engineer,
 Shimla Rural District
 Himachal Pradesh

Schedule Of Quantity						Estimated Cost:- 4,99,881.00	
Name of Work :- Annual Repair and Maintenance of Wellness Center at Nehra Distt. Shimla (SH:- Providing and Fixing Prepainted sheet, roof, rafter,						Earnest Money:- 10,000.00	
						Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia & length (hold fast lugs or dash fastener shall be paid for separately). Deodar wood	1.23	Cum	113690.00	Rupees One Lakh Thirteen Thousand Six Hundred Ninety Only	Per Cubic metre	139839
2	Providing wood work in trusses, purlins, rafters, post, post plates, wall plates and the like wrought framed, hoisted and fixed in position. 2nd class D/wood. including carriage of materials with in all leads, lifts as per direction of Engineer-in charge.	1.45	Cum	113690.00	Rupees One Lakh Thirteen Thousand Six Hundred Ninety Only	Per Cubic metre	164851
3	Providing and fixing 0.60mm thick prepainted steel sheet in roofing with hot dipped metallic zinc coated sheet with top coat of regular modified polyster (RNP) organic coating of 20 microns over 5 microns primer coating to back coat of polyster of 5 microns over 5 microns primer coating i/c fixing with prepainted iron J or L hooks, bolts and nuts 6mm dia metre with prepainted limpet and rubber washers complete with all accesoriees as required as per the direction of Engineer-in-charge.	154.18	Sqm	1266.00	Rupees One Thousand Two Hundred Sixty Six Only	Per Square metre	195192
Total Rs.							499881
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhama

Schedule Of Quantity

Name of Work :- Annual Repair and Maintenance of Wellness Center at Nehra Distt. Shimla (SH:- Providing and Fixing 19mm thick commercial board, & WS & SI works Thereof) Job No. 4

Estimated Cost:- 4,99,947.00

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Providing and fixing 19mm thick water proof commercial board in shelves/box for cup board with butt joints & fixing with nails & screws etc complete) including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I and as per direction of Engineer-in-Charge.	40.50	Sqm	1450.00	Rupees One Thousand Four Hundred Fifty Only	Per Square Metre	58725
2	Providing and fixing 19mm thick commercial board shutter for up boards i/c fixing with nickel plated piano hinges with screws etc complete including carriage of materials within all leads and lifts	18.75	Sqm	1650.00	Rupees One Thousand Six Hundred Fifty Only	Per Square Metre	30938
3	Providing and fixing hard wood square edges cover fillets (beading) 19mmx6mm section i/c mitring at junctions with wood screws and nails complete including carriage of materials within all leads and lifts.	150.00	Rmt.	52.00	Rupees Fifty Two Only	Per Running Metre	7800
4	Distempering (two coats) with oil bound washable distemper of approved brand and manufacture and of required shade on undecorated wall surfaces to give an even shade over and including a priming coat with distemper primer of approved brand and manufacture after thoroughly brushing the surface free from mortar droppings and other foreign matter and also including preparing the surface even and sand papered smooth. Priming coat with distemper primer	453.86	Sqm	123.00	Rupees One Hundred Twenty Three Only	Per Square Metre	55825
5	Painting wood work with Deluxe Multi Surface Paint of required shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @ 0.75 ltr/10 sqm of approved brand and manufacture. The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	75.75	Sqm	134.00	Rupees One Hundred Thirty Four Only	Per Square Metre	10151

	Steel work welded in built up sections/ framed work, including cutting hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. As per required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works complete including carriage of material in all leads and lifts as per direction of the Engineer in charges.	480.00	Kg.	110.00	Rupees One Hundred Ten Only	Per Kilo gram	52800
7	Making plinth protection 50mm thick of cement concrete 1 :3 :6 (1 cement : 3 sand : 6 stone aggregate 20 mm nominal size) over 75mm thick bed of dry brick ballast 40mm nominal size, well rammed and consolidated and grouted with fine sand, including necessary excavation, levelling & dressing & finishing the top smooth complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	19.26	Sqm	637.00	Rupees Six Hundred Thirty Seven Only	Per Square Metre	12269
8	Providing and fixing 15mm dia CP brass bib tap of (heavy duty ISI marked IS:8931 & 8934) including carriage of materials within all leads and lifts.	2.00	Nos	620.00	Rupees Six Hundred Twenty Only	Each	1240
9	Providing and placing on terrace (at all floor levels) polyethylene water storage tank, IS : 12701 marked, with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank complete including carriage of material in all leads and lifts as per	1000.00	Litres	8.50	Rupees Eight and Paise Fifty Only	Per Liter	8500
10	Finishing walls with Acrylic Smooth exterior paint of required shade : New work (Two or more coat applied @ 1.67 ltr./ 10 Sqm over and including priming coat of exterior primer applied @ 2.20 kg. / 10 Sqm) complete including carriage of material in all leads and lifts as per direction of Engineer in Charge.	632.80	Sqm	146.00	Rupees One Hundred Forty Six Only	Per Square Metre	92389
11	Providing and fixing MS BP sheet 2.00 mm thick in eves board /facial/ soffits/ ceiling including cutting fixing and welding to steel roof members and applying a coat of red lead primer complete as per the instruction of Engineer-in-charge (base members of steel work shall be measured and paid seperately).	94.01	Sqm	1801.00	Rupees One Thousand Eight Hundred One Only	Per Square Metre	169312
	Total Rs.						499947
	Amount Quoted by the Contractor in Percentage						
	Note :- All the material will procured by the contractor him self						

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhamsi

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Devidhar Bhajyar Road Km. 0/00 to 2/200 (Sh: Construction of R-wall at Rd. 1/620 to 1/642) Balance Work

Estimated Cost: - Rs 233405 /- only
Earnest Money : - Rs. 5000 /-only
Time: - One Month

S. No.	Sub head and items of work	Qty.	Rate		Unit	Amount
			3	4		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	23.26 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	5429.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	5.76 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	2053.00
3	Providing and Laying in position cement concrete of specified grade excluding the cost of centering and shuttering in all work upto plinth level :- 1:5:10 (1 cement: 5 sand : 10 graded stone aggregate 40 mm nominal size) including the carriage of material upto all leads and lifts as per the direction of Engineer in Charge.	63.96 Cum	3419.57	Rupees Three Thousand Four Hundred Nineteen and Paise Fifty Seven Only	Per cubic metre	218716.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	4.32 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	3637.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full width of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	21.00 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	3570.00
0					Total:	233405.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

**Executive Engineer,
Shimla Rural Division,
HPPWD, Dhamsi**

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Banuti to Dayla Road In km. 0/00 to 1/00 (Sh: Constructin of Wire crate wall at Rd. 0/985 to 1/00) JOB NO. I

Estimated Cost: - Rs 486723 /- only
Earnest Money : - Rs. 10000 /-only
Time: - One Month

S.	Sub head and items of work	Qty.		Rate		Unit	Amount
		3		figures	In words		
1				4	5	6	7
1	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	21.20	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	7558.00
2	Providing and laying of boulder apron laid in wire crates with 4 mm (four milimeter) dia GI wire conforming to IS:280 (two hundred eighty) and IS:4826 (four thousnad eight hundred twenty six) in 100 mm x 100 mm (one hundred into one hundred milimeter) mesh (woven diagonally) including 10 (ten) percent extra for laps and joints laid with stone boulders weighing not less than 25 kg (twenty five kilogramme) each as per drawinrg and technical specifications clause 1301, (one thousand three hundred one) including carriage of all labour equipement and material to various location through all modes of transportation in all leads lifts all incidental charge.	136.72	Cum	3560.00	Rupees Three Thousand Five Hundred Sixty Only	Per Running Metre	486723.00
0							
						Total:	486723.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhamsi

Name of Work:- Annual Repair & maintenance of Ghanahatti Parech Road in Km. 0/00 to 1/800 (Sh: C/o 2nd Step of B-Wall at Rd. 1/423 to 1/438)

SCHEDULE OF QUANTITY

Estimated Cost: - Rs 350081 /- only
 Earnest Money : - Rs. 7000 /-only
 Time: - One Month

S. No.	Sub head and items of work	Qty.		Rate		Unit	Amount
		3	4	5	6		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	20.55	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	4796.00
2	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm (Twenty milimeter) nominal mix including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	72.90	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	335340.00
3	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	58.50	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	9945.00
0							
Total:							350081.00

Amount Quoted by the Contractor in Percentage

Rs.

0

**Executive Engineer,
 Shimla Rural Division,
 HPPWD, Dhamsi**

SCHEDULE OF QUANTITY

NAME OF WORK:- Restoration of Rain Damage on Shimla Mandi Road km 39/200 to 52/300 (SH:-Removal of Slips/ Landslide at Various R.Ds)					Estimated cost:-	4,98,634.00
					Earnest money:-	10000.00
					Time:-	One Month
Sr. No.	Description	Qty.	Unit	Rate in figure.	Rate in word.	Amount.
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in all kind of soil/ ordinary rock by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611	2235.43	Per Sqm	223.06	Rupees Two Hundred Twenty Three and Paise six only	498634
Amount procured by the contractor in percentage					Total:-	498634.00
Conditions:- All the Machineries/materials will be procured by the contractor himself and bills will be submitted						

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhani.

Schedule Of Quantity

Name Of Work :- Restoration of Rain Damage on Shimla Mandi Road km 39/200 to 52/300 (SH:- Supplying and Stacking of Stones/Boulders for Filling in the washed out portion on Shimla Mandi Road in km 51/240 to 52/000)

Estimated Cost:- 4,98,541.00

Earnest Money:- 10000.00

Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Supplying and stacking of hard stone/boulders of approved quality, each weighing not less than 25 kg, at designated locations including all leads and lifts, loading, unloading, carriage, and stacking properly for filling . The rate shall include the cost of all materials, labour, transportation, and incidental charges required to complete the work in all respects ,as directed by the Engineer-in-Charge.	359.96	Cum	1384.99	Rupee Six Hundred Only	Per cubic metre	498541.00
Total Rs.							498541.00
Amount procured by the contractor in percentage							
Conditions:- All the Machineries/materials will be procured by the contractor himself and bills will be submitted							


 Executive Engineer,
 Shimla Rural Division,
 HP,PWD, Dhani.

SCHEDULE OF QUANTITY

Name of Work:- Widening / Improvement of Slapper Tattapani Suni Luhri Road km 72/000 to 86/000 (SH:-C/O R/Wall at R.D 73/225 to 73/237)					Estimated cost:-	4,84,141.00
					Earnest money:-	10000.00
					Time:-	One Month
Sr. No.	Description	Qty.	Unit	Rate in figure.	Rate in word.	Amount.
1	Earth work in excavation for structure as per drawing and technical specification clause 305.1 I/c setting out, construction of shoring and bracing removal of stums and other deleterious materials and disposal upto a lead of 50 metre, dressing of sides and bottom and back filling in tranches with excavated suitable material.	29.04	per cum	559.10	Five hundred fifty-nine rupees and ten paise only	16236
2	Providing concrete for plain/reinforced concrete 1:4:8 in open foundation complete as per drawing and technical specification clauses 802, 803, 1202 & 1203.	70.92	per cum	6009.70	Six thousand nine rupees and seventy paise only	426208
3	Providing weepholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100 mm dia. PVC pipe extending through the full width of the structures with slope of 1(v) : 20 (H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7.	36.00	Nos.	245.70	Two hundred forty-five rupees and seventy paise only	8845
4	Back filling behind abutment, wing wall and return wall complete as per drawing and technical specification clause 1204.3.8 granular material.	21.72	per cum	1512.50	One thousand five hundred twelve rupees and fifty paise only	32852
					Total:-	484141.00
Amount procured by the contractor in percentage						
Conditions:- All the Machineries/materials will be procured by the contractor himself and bills will be submitted						


 Executive Engineer,
 Shimla Rural Division,
 Himachal Pradesh


SCHEDULE OF QUANTITY

Name of work: RR Damages on Shimla MAndi Road Km 39/200 to 52/300 (SH : C/O B/Wall at RD 44/865 to 44/884).						Estimated cost:-	4,99,660.00
						Earnest money:-	10000.00
						Time:-	One Month
Sr. No.	Description	Qty.	Unit	Rate in figure.	Rate in word.	Amount.	
1	Excavation in soil in hilly area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 metre and a lead upto 20mtr as per drawing and technical specification clause 1603.1 and other deleterious material and disposal upto all leads and lifts as per MORD Specification directed by Engineer –in- Charge .	11.02	per cum	233.40	Five hundred fifty-nine rupees and ten paise only	2572.00	
2	Earth work in excavation for structures as per drawing and technical specifications clause No. 305.1 including setting out construction of shoring and bracing ,removal of stumps and other deleterious material and disposal upto all lead and lifts dressiong of side and bottom and backfilling in trenches with excavated suitable materials as per MORD Specification directed by Engineer –in- Charge.	8.55	per cum	356.50	Six thousand nine rupees and seventy paise only	3048.00	
3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802,803,1202 & 1203 in cement concrete 1:4:8 (1 Cement 4 Sand 8 graded stone aggregate 20 mm nominal mix) including carriage of material up to all leads and lifts as per the direction –in- Charge.	101.65	Nos.	4800.00	Two hundred forty-five rupees and seventy paise only	487920.00	
4	Providing and laying 100 mm dia meter pipe for weep holes complete of approved quality including carries of material within all leads and lift.	34.00	per cum	180.00	One thousand five hundred twelve rupees and fifty paise only	6120.00	
					Total:-		499660.00
	Amount procured by the contractor in percentage						
	Conditions:- All the Machinerries/materials will be procurred by the contractor himself and bills will be submitted						

Executive Engineer
 Shimla Rural Division
 HPPWD Dhami

SCHEDULE OF QUANTITY

NAME OF WORK:- Restoration of Rain Damage on Garkhan Berti Road km 0/000 to 5/000 (SH:-Removal of Slips/ Landslide at Various R.Ds						Estimated cost:-	4,98,912.00
						Earnest money:-	10000.00
						Time:-	One Month
Sr. No.	Description	Qty.	Unit	Rate in figure.	Rate in word.	Amount.	
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in all kind of soil/ ordinary rock by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611	2236.67	Per Sqm	223.06	Rupee Three hundred one and Twenty Six paise only	498912	
						Total:-	498912.00


Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhani.

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on 16 Mile Sedan Road Km. 0/00 to 2/660 (Sh: Construction of R-wall at Rd. 0/030 to 0/040)

Estimated Cost: - Rs 487123 /- only
Earnest Money : - Rs. 10000 /-only
Time: - One Month

S. No.	Sub head and items of work	Qty.	Rate figures		Unit	Amount
			4	5		
1	2	3	4	5	6	7
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	25.65 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	5987.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	23.75 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	8467.00
3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:5:10 (1 Cement : 5 coarse sand : 10 graded stone aggregate 40mm nominal size) complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	133.48 Cum	3419.57	Rupees Three Thousand Four Hundred Nineteen and Paise Fifty Seven Only	Per cubic metre	456444.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	13.68 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	11516.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	27.70 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	4709.00
0					Total:	487123.00

Amount Quoted by the Contractor in Percentage		Rs.
--	--	------------

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla Rural Division
HPPWD, Dhani

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on 16 Mile Sedan Road Km. 0/00 to 2/660 (Sh: Construction of R-wall at Rd. 0/008 to 0/016)

Estimated Cost - Rs 493007 /- only
Earnest Money : - Rs. 10000 /-only
Time: - One Month

S. No.	Sub head and items of work	Qty.		Rate figures		Unit	Amount
		3	4	5	6		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	21.60	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	5041.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	20.00	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	7130.00
3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:5:10 (1 Cement : 5 coarse sand : 10 graded stone aggregate 40mm nominal size) complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	136.40	Cum	3419.57	Rupees Three Thousand Four Hundred Nineteen and Paise Fifty Seven Only	Per cubic metre	466429.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204 3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	11.52	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	9698.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	27.70	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	4709.00
0						Total:	493007.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla Rural Division
HPPWD,Dhami

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on 16 Mile Sedan Road Km. 0/00 to 2/660 (Sh: Construction of R-wall at Rd. 0/00 to 0/008)

Estimated Cost: - Rs 493411 /- only
Earnest Money : - Rs. 10000 /-only
Time. - One Month

S. No.	Sub head and items of work	Qty.		Rate	Unit	Amount	
		3	4	figures			
1	2	3	4	5	6	7	
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	21.60	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	5041.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	20.00	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	7130.00
3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:5:10 (1 Cement : 5 coarse sand : 10 graded stone aggregate 40mm nominal size) complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	136.40	Cum	3419.57	Rupees Three Thousand Four Hundred Nineteen and Paise Fifty Seven Only	Per cubic metre	466429.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	12.00	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	10102.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	27.70	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	4709.00
0						Total:	493411.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla Rural Division
HPPWD, Dhani

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on 16 Mile Sedan Road Km. 0/00 to 2/660 (Sh: Construction of R-wall at Rd. 0/020 to 0/030)

Estimated Cost - Rs 487603 /- only
Earnest Money - Rs. 10000 /-only
Time - One Month

S. No.	Sub head and items of work	Qty.		Rate figures		Unit	Amount
		3	4	5	6		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	25.65	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	5987.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	23.75	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	8467.00
3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:5:10 (1 Cement : 5 coarse sand : 10 graded stone aggregate 40mm nominal size) complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	133.48	Cum	3419.57	Rupees Three Thousand Four Hundred Nineteen and Paise Fifty Seven Only	Per cubic metre	456444.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	14.25	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	11996.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	27.70	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	4709.00
0						Total:	487603.00

Amount Quoted by the Contractor in Percentage		Rs.
--	--	------------

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla Rural Division
HPPWD, Dhamsi

Schedule Of Quantity

A/R & M/O PWD Rest house house at TaraDevi (SH:- Providing Furnishing Items in H.P.P.W.D. rest house.) Job NO.I

Estimated Cost:- 472830.00

Earnest Money:- 10000.00

Time:- One Month.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Providing & placing Quilt in superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	36	Nos	4200.00	Rupees Four Thousand & Two Hundred only.	Nos	151200.00
2	Providing & placing Pillow in superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	48.00	Nos	650.00	Rupees Six hundred & fifty only.	Nos	31200.00
3	Providing & placing Pillow Cover in superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	96.00	Nos	180.00	Rupees One hundred & eighty only.	Nos	17280.00
4	Providing & placing White Bed Sheed in superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	48.00	Nos	2800.00	Rupees Two Thousand & eight hundred only.	Nos	134400.00
5	Providing & placing Quilt Cover single in superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	36	Nos	2800.00	Rupees Two Thousand & eight hundred only.	Nos	100800.00
6	Providing & placing Bucket in superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	15	Nos	550.00	Rupees five hundred & fifty only.	Nos	8250.00
7	Providing & placing Mug superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	15	Nos	80.00	Rupees eighty only	Nos	1200.00
8	Providing & placing Big Towel superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	30	Nos	950.00	Rupees Nine hundred & fifty only.	Nos	28500.00
Total							472830.00

Amount Quatated by the Contractor in Percentage.

Note:- All the material will procured by the contractor him self.

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhami. *Am*

Schedule Of Quantity

MR & M/O PWD Rest house house at TaraDevi (SH:- Providing Furnishing Items in H.P.P.W.D. rest house.) Job NO.II

Estimated Cost:- 491400.00

Earnest Money:- 10000.00

Time:- One Month.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
		3	4	In figures	In words		
1	2	3	4	5	6	7	8
1	Providing & placing Hand Towel superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	10	Nos	250.00	Rupess Two hundred & fifty only.	Nos	2500.00
2	Providing & placing Bed Cover superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	30	Nos	3500.00	Rupess Three Thousand & five hundred only.	Nos	105000.00
3	Providing & placing Jug superior quality approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	10	Nos	250.00	Rupess Two hundred & fifty only.	Nos	2500.00
4	Providing & placing Mattress 6x3x5" superior quality in approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	12	Nos	18000.00	Rupess Ten Thousand & eight hundred only.	Nos	216000.00
5	Providing & placing Door Matary Quilt superior quality in approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	20	Nos	2500.00	Rupess Two Thousand & five hundred only.	Nos	50000.00
6	Providing & placing Door Matary Bed Sheed single superior quality in approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	20	Nos	750.00	Rupess Seven hundred & fifty only.	Nos	15000.00
7	Providing & placing Door Matary Pillow superior quality in approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	20	Nos	500.00	Rupess Five hundred only.	Nos	10000.00
8	Providing & placing Door Matt superior quality in approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	24	Nos	650.00	Rupess six hundred & fifty only.	Nos	15600.00
9	Providing & placing entrance Door Matt full size superior quality in approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	2	Nos	1000.00	Rupess One Thousand only.	Nos	2000.00
10	Providing & placing Curtain superior quality in approved colour/shade complete in all lead & lift as per the direction of Engineer in Charge.	26	Nos	2800.00	Rupess Two Thousand & eight hundred only.	Nos	72800.00
						Total:-	491400.00

Amount Quatated by the Contractor in Percentage.

Note:- All the material will procured by the contractor him self.

Schedule Of Quantity

Estimated Cost:- 4,98,960.00

Name of Work :- A/R & M/O PWD Rest House at Taradevi. (SH:- Providing water Proofing New Rest House Thereof)

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Preparing the surface to creceive waterproofing treatment by removal of previous waterproofing treatment and making surface ready to receive water proofing treatment. Cleaning the surface with wire brushes to clean, smooth & dry surface, free of any loose particles/reinforcement bars/ debris etc. Grooving and cleaning all the existing cracks and repairing them with polmer modified mortar. washing if required (to bedecied by our site incharge) before applying waterproofing coat. providing and applying waterproofing two coat of Brawnflax supertop over single coat of Brawnflax prime as per site requirement and complete in all respect inculding all leads, lift and carries of material at site as per directed by the Engineer in charge allowing drying gap between successive coats	324.00	Sqm	1540.00	Rupees One Thousand Five Hundred Forty Only	per Square metre	498960
Total Rs							498960
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

~~Executive Engineer,~~
 Shimla Rural Division,
 HP, PWD, Dhamsi. *[Signature]*

Schedule Of Quantity

Name Of Work :- R/R Damages on Shoghi Mehli road km 0/00 to 12/375 (SH:- C/o R/wall along with Toe wall at Rd 7/210 to 7/222)

Estimated Cost:- 4,90,378.00

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount	
		3	4	In figures	In words			
1	2	3	4	5	6	7	8	
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried, out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings including carriage of material within all leads and lifts.	56.40	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	13164	
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	28.80	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	10267	
3	Providing and laying concrete for plain/reinforced concrete 1:4:8 (one cement isto Five sand isto Ten graded crushed stone aggregate 20 milimeter Nominal size for plain/ reinforced concrete in open foundation and plinths or similar works complete as per drawing and technical specifications MORD clause 802,803,1202 & 1203 and curing complete including the cost of form work and carriage of material in all leads lifts as per the direction of Engineer-in- charge.	93.66	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	430836	
4	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7	99.60	Rmt.	180.00	Rupees One Hundred Eighty Only	Per running Metre	17928	
5	Back filling behind abutment wing wall and retaning wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	21.60	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	18183	
Total Rs.								490378
Amount Quoted by the Contractor in Percentage								
Note :- All the material will procured by the contractor him self								

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dhamsi

Schedule Of Quantity						Estimated Cost:- 4,93,264.00	
Name Of Work :- R/R Damages on Shoghi Mehli road km 0/00 to 12/375 (SH:- C/o R/wall along with Toe wall at Rd 7/222 to 7/234)						Earnest Money:- 10,000.00	
						Time:- One Months.	
S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings including carriage of material within all leads and lifts	56.40	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	13164
2	Earth work in excavation for structures as per drawing and technical specification clauses 305 1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	28.80	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	10267
3	Providing and laying concrete for plain/reinforced concrete 1:4:8 (one cement isto Five sand isto Ten graded crushed stone aggregate 20 milimeter Nominal size for plain/ reinforced concrete in open foundation and plinths or similar works complete as per drawing and technical specifications MORD clause 802,803,1202 & 1203 and curing complete including the cost of form work and carriage of material in all leads lifts as per the direction of Engineer-in- charge.	93.66	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	430836
4	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204 3 7	98.80	Rmt.	180.00	Rupees One Hundred Eighty Only	Per running Metre	17784
5	Back filling behind abutment wing wall and retaning wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP PWD, specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	25.20	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	21213
Total Rs.							493264
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dhami.

Schedule Of Quantity


Estimated Cost:- 2,93,505.00

Name Of Work :- R/R damages on Shoghi Mehli Road Km. 0/00 to 12/375 (SH:- C/O R/wall at Rd 3/910 to 3/925)

Earnest Money:- 5,000.00

Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount	
				In figures	In words			
1	2	3	4	5	6	7	8	
1	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	23.10	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per Cubic metre	8235	
2	Providing and laying cement concrete 1:3:6 (1 cement : 3 Sand :6 graded stone aggregate 20mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	51.6	Cum	5200.00	Rupees Five Thousand Two Hundred Only	Per Cubic metre	268320	
3	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7	29.40	Rmt	190.00	Rupees One Hundred Ninety Only	Per running metre	5586	
4	Back filling behind abutment wing wall and retaning wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	13.5	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per Cubic metre	11364	
Total Rs.								293505
Amount Quoted by the Contractor in Percentage								
Note :- All the material will procured by the contractor him self								

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhama. 

Schedule Of Quantity

Estimated Cost:- 4,85,292.00

Name Of Work :- R/R damages on Shoghi Mehli Road Km. 0/00 to 12/375 (SH:- C/O R/wall at Rd 5/960 to 5/975)

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	47.55	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per Cubic metre	16952
2	Providing and laying cement concrete 1:3:6 (1 cement : 3 Sand : 6 graded stone aggregate 20mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	85.05	Cum	5200.00	Rupees Five Thousand Two Hundred Only	Per Cubic metre	442260
3	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full width of the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7	61.50	Rmt	190.00	Rupees One Hundred Ninety Only	Per running metre	11685
4	Back filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	17.1	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per Cubic metre	14395
Total Rs.							485292
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dhami

Schedule Of Quantity						Estimated Cost:- 4,90,156.00	
Name Of Work :- R/R damages on Shoghi Mehli Road Km. 0/00 to 12/375 (SH:- C/O R/wall at Rd 7/234 to 7/246.50) Balance work						Earnest Money:- 10,000.00	
						Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	21.25	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per Cubic metre	4960
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	20.81	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per Cubic metre	7419
3	Providing and laying concrete for plain/reinforced concrete 1:4:8 (one cement isto Five sand isto Ten graded crushed stone aggregate 20 milimeter Nominal size for plain/ reinforced concrete in open foundation and plinths or similar works complete as per drawing and technical specifications MORD clause 802,803,1202 & 1203 and curing complete including the cost of form work and carriage of material in all leads lifts as per the direction of Engineer-in- charge.	97.5	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per Cubic metre	448500
4	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204.3.7	92.50	Rmt	180.00	Rupees One Hundred Eighty Only	Per running metre	16650
5	Back filling behind abutment wing wall and retaning wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	15.00	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per Cubic metre	12627
Total Rs.							490156
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhami

Schedule Of Quantity

Name Of Work :- R/R damages on Shoghi Mehli Road Km. 0/00 to 12/375 (SH:- C/O R/wall at Rd 6/330 to 6/342) Balance work

Estimated Cost:- 4,89,277.00

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		In words	Unit	Amount
		3	4	In figures	5			
1	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including carriage of material within all leads and lifts.	60.00	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per Cubic metre	21390	
2	Providing and laying cement concrete 1:3:6 (1 cement : 3 Sand : 6 graded stone aggregate 20mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	87	Cum	5200.00	Rupees Five Thousand Two Hundred Only	Per Cubic metre	452400	
3	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (V):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7	49.00	Rmt	180.00	Rupees One Hundred Eighty Only	Per running metre	8820	
4	Back filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	7.92	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per Cubic metre	6667	
Total Rs.							489277	
Amount Quoted by the Contractor in Percentage								
Note :- All the material will procured by the contractor him self								

Executive Engineer,
 Shimla Rural Division,
 HP, PWD, Dharti.

Schedule Of Quantity

Name Of Work :- R/R damages on Tutikandi Sheelgoan via Kiari Road Km. 0/00 to 3/870 (SH:- C/O R/wall at Rd 2/200 to 2/216)

Estimated Cost:- 4,62,556.00
Earnest Money:- 10,000.00
Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		In words	Unit	Amount
		3	4	5	6			
1	Earth work of excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth Including carriage of material within all leads and lifts	50.72	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per Cubic metre	18082	
2	Providing and laying concrete for plain/reinforced concrete 1:4:8 (one cement :sto Five sand :sto Ten graded crushed stone aggregate 20 millimeter Nominal size for plain/ reinforced concrete in open foundation and plinths or similar works complete as per drawing and technical specifications MORD clause 802,803,1202 & 1203 and curing complete including the cost of form work and carriage of material in all leads lifts as per the direction of Engineer-in-charge	90.72	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per Cubic metre	417312	
3	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pipe extending through the full width of the structures with slop of 1 (v) 20(H) towards drawing face complete as per drawing and technical specification clauses 614,709,1204 3.7	65.60	Rmt	180.00	Rupees One Hundred Eighty Only	Per running metre	11808	
4	Back filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD.. specifications of 1990 volume-I Including carriage of material within all leads and lifts.	18.24	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per Cubic metre	15354	
Total Rs.							462556	
Amount Quoted by the Contractor in Percentage								
Note :- All the material will procured by the contractor him self								

Executive Engineer,
 Shimla Rural Division,
 HP, PWD, Dharm

Schedule Of Quantity

Estimated Cost:- 4,98,225.00

Name of Work :- Restoration of Rain damages Totu Tara Devi Bypass Road Km. 0/00 to 4/105 (SH:- Hiring of JCB for removal of Slips at various Rds)

Earnest Money:- 10,000.00


Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5		6 7	8
1	Hiring of JCB/Excavator cum loader for removal of Land slides /slips including the cost of fuel oil, lubricants, wages of operational staff, any repair during operation will be carried out at his risk and cost including carriage of Machinery from one place to another at required location.actual working will be accounted for payment and proper disposal of snow/slips will be ensured by the contractor and including all leads and lifts and work will be executed as per the direction of Engineer in charge.	455.00	Hour	1095.00	Rupees One Thousand Ninety Five Only	Per Hour	498225
Total Rs.							498225
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhamsi. *[Signature]*


SCHEDULE OF QUANTITY

Name of work: RR Damages on Shimla MAndi Road Km 39/200 to 52/300 (SH : C/O B/Wall at RD 45/075 to 45/090)					Estimated cost:-	3,83,470.00
					Earnest money:-	10000.00
					Time:-	One Month
Sr. No.	Description	Qty.	Unit	Rate in figure.	Rate in word.	Amount.
1	Excavation in soil in hilly area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 metre and a lead upto 20mtr as per drawing and technical specification clause 1603.1 and other deleterious material and disposal upto all leads and lifts as per MORD Specification directed by Engineer –in- Charge .	9.60	per cum	233.40	Two hundred thirty-three rupees and forty paise only	2241.00
2	Earth work in excavation for structures as per drawing and technical specifications clause No. 305.1 including setting out construction of shoring and bracing ,removal of stumps and other deleterious material and disposal upto all lead and lifts dressiong of side and bottom and backfilling in trenches with excavated suitable materials as per MORD Specification directed by Engineer –in- Charge.	44.40	per cum	356.50	Three hundred fifty-six rupees and fifty paise only	15829.00
3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802,803,1202 & 1203 in cement concrete 1:4:8 (I Cement 4 Sand 8 graded stone aggregate 20 mm nominal mix) including carriage of material up to all leads and lifts as per the direction –in- Charge.	74.55	Nos.	4800.00	Four thousand eight hundred rupees and zero paise only	357840.00
4	Providing and laying 100 mm dia meter pipe for weep holes complete of approved quality including carries of material within all leads and lift.	42.00	per cum	180.00	One hundred eighty rupees and zero paise only	7560.00
					Total:-	383470.00
Amount procured by the contractor in percentage						
Conditions:- All the Machineries/materials will be procured by the contractor himself and bills will be submitted						


 Executive Engineer,
 Shimla Rural Division,
 HP,PWD, Dhani.

SCHEDULE OF QUANTITY

Name of Work :- Restoration of Rain Damage on Basantpur Naltu Road Km 0/000 to 7/000 (SH:-C/O R/wall at R.D.6/685 to 6/707)				Estimated cost:-	4,95,910.00	
				Earnest money:-	10000.00	
				Time:-	One Month	
Sr. No.	Description	Qty.	Unit	Rate in figure.	Rate in word.	Amount.
1	Excavation in soil in hilly area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 metre and a lead upto 20mtr as per drawing and technical specification clause 1603.1 and other deleterious material and disposal upto all leads and lifts as per MORD Specification directed by Engineer -in- Charge .	28.60	per cum	233.40	Two hundred thirty-three rupees and forty paise only	6675.00
2	Earth work in excavation for structures as per drawing and technical specifications clause No. 305.1 including setting out construction of shoring and bracing ,removal of stumps and other deleterious material and disposal upto all lead and lifts dressiong of side and bottom and backfilling in trenches with excavated suitable materials as per MORD Specification directed by Engineer -in- Charge.	11.88	per cum	356.50	Three hundred fifty-six rupees and fifty paise only	4235.00
3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802,803,1202 & 1203 in cement concrete 1:4:8 (I Cement 4 Sand 8 graded stone aggregate 20 mm nominal mix) including carriage of material up to all leads and lifts as per the direction -in- Charge.	96.14	Nos.	4800.00	Four thousand eight hundred rupees and zero paise only	461472.00
4	Providing and laying 100 mm dia meter pipe for weep holes complete of approved quality including carries of material within all leads and lift.	34.00	per cum	180.00	One hundred eighty rupees and zero paise only	6120.00
5	Back filling behind abutment,wing wall and return wall complete as per drawing and technical specification clause 1204.3.8 granular material.	20.68	per cum	841.80	Eight hundred forty one rupees and eighty paise only	17408.00
				Total:-		495910.00
Amount procured by the contractor in percentage						
Conditions:- All the Machineris/materials will be procurred by the contractor himself and bills will be submitted						


 Executive Engineer,
 Shimla Rural Division,
 HP,PWD, Dhani.

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Okhroo Nehra via Keru Road Km. 0/00 to 2/00 (Sh: Construction of R-wall in between Km. 1/690 to 1/700)

**Estimated Cost - Rs 344722 /- only
Earnest Money : - Rs. 7000 /-only
Time: - One Month**

S. No.	Sub head and items of work	Qty.	Rate figures		Unit	Amount
			4	5		
1	2	3	4	5	6	7
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	12.90 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	3011.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	27.40 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	9768.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	69.90 Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	321540.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	30.00 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	5100.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	6.30 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	5303.00
0					Total:	344722.00

Amount Quoted by the Contractor In Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla Rural Division
HPPWD, Dhani

SCHEDULE OF QUANTITY

Name of Work:- Construction of Okhroo Nehra via Keru Road Km. 0/00 to 2/00 (Sh: C/o B-wall at R.D. 0/790 to 0/830)

Estimated Cost - Rs 396821 /- only
 Earnest Money - Rs 8000 /-only
 Time - One Month

S. No.	Sub head and items of work	Qty.	Rate figures		Unit	Amount
			4	5		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	40.00 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	9336 00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	28.00 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	9982 00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	80.80 Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	371680 00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	34.25 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	5823 00
0					Total:	396821.00

Amount Quoted by the Contractor in Percentage		Rs.	
--	--	-----	--

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
 Shimla Rural Division
 HPPWD, Dhamsi

SCHEDULE OF QUANTITY

Name of Work:- Construction of Okhroo Nehra via Keru Road Km. 0/00 to 2/00 (Sh: Construction of Okhroo Nehra via Keru Road Km. 0/00 to 2/00 (Sh: Construction of Protection wall and Pucca Path to village path to village between RD. 1/480 to 1/496.50 and C/o Both side wing wall at Rd. 0/495 & catch pit at Rd. 0/690 balance work) Estimated Cost: - Rs 499655 /- only
 Earnest Money: - Rs. 10000 /-only
 Time: - One Month

S. No.	Sub head and items of work	Qty.		Rate figures		Unit	Amount
		3	4	5	7		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	17.00	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	3968.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	10.25	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	3654.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	99.30	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	456780.00
4	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:3:6 (1 Cement : 3 coarse sand) : 6 graded stone aggregate 20 mm nominal size) Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	6.00	Cum	5000.00	#NAME?	Per cubic metre	30000.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	30.90	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	5253.00
0						Total:	499655.00

Amount Quoted by the Contractor in Percentage		Rs.
--	--	------------

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla Rural Division
HPPWD,Dhami


SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Chanahatti Nehra Bhukho Road Km. 0/00 to 8/00 (Sh: Construction of B/Wall at RD. 5/720 to 5/738)			Estimated Cost : - Rs 495970 /- only Earnest Money : - Rs. 10000 /-only Time : - One Month			
S. No.	Sub head and items of work	Qty.	Rate figures		Unit	Amount
			3	4		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	34.92 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	8150.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge	63.36 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	22588.00
3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:5:10 (1 Cement : 5 coarse sand : 10 graded stone aggregate 40mm nominal size) complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	130.32 Cum	3500.00	Rupees Three Thousand Five Hundred Only	Per cubic metre	456120.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	53.60 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	9112.00
					Total:	495970.00
0						

Amount Quoted by the Contractor in Percentage					Rs.	
--	--	--	--	--	------------	--

Note : (i) All the material will procured by the contractor him self.


Executive Engineer
Shimla Rural Division
HPPWD,Dhami

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Chanahatti Nehra Bhukho Road Km. 0/00 to 8/00 (Sh: Construction of B/Wall at RD. 5/570 to 5/580)

Estimated Cost - Rs 369801 /- only
Earnest Money : - Rs. 7000 /-only
Time. - One Month

S. No.	Sub head and items of work	Qty.	Rate figures		Unit	Amount	
			3	4			5
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	39.74	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	9275.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge	11.04	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	3936.00
3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:5:10 (1 Cement : 5 coarse sand : 10 graded stone aggregate 40mm nominal size) complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	99.26	Cum	3500.00	Rupees Three Thousand Five Hundred Only	Per cubic metre	347410.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	54.00	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	9180.00
						Total:	369801.00
0							

Rs.

Amount Quoted by the Contractor in Percentage

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla Rural Division
HPPWD, Dhama

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Gharog Nalta Road Km. 0/00 to 7/000 (Sh: Construction of Retaining Wall at RD. 1/730 to 1/738.90)

Estimated Cost: - Rs 494984 /- only
 Earnest Money : - Rs. 10000 /-only
 Time: - One Month

S. No.	Sub head and items of work	Qty.		Rate figures		Unit	Amount
		3	4	5	6		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	10.68	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	2493.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	32.04	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	11422.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	99.52	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	457792.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	21.36	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	17981.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	31.15	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	5296.00
						Total:	494984.00

Amount Quoted by the Contractor in Percentage		Rs.
--	--	------------

Note : (i) All the material will procured by the contractor him self.


 Executive Engineer
 Shimla Rural Division
 HPPWD, Dhamsi

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Gharog Nalta Road Km. 0/00 to 7/000 (Sh: Construction of Retaining Wall at RD. 1/730 to 1/738.90)

Estimated Cost: - Rs 494984 /- only
Earnest Money : - Rs 10000 /-only
Time: - One Month

S. No.	Sub head and items of work	Qty.		Rate figures		Unit	Amount
		3	4	5	6		
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	10.68	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	2493.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	32.04	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	11422.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	99.52	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	457792.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	21.36	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	17981.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	31.15	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	5296.00
						Total:	494984.00

Rs.

Amount Quoted by the Contractor in Percentage

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
Shimla Rural Division
HPPWD, Dhani

SCHEDULE OF QUANTITY

Name of Work: - Improvement of curves on Galog Nehra Okhroo Road Km. 0/00 to 12/00 (Sh: Curve cutting in various RDs. 8/940 to 9/015 and 9/100 to 9/160)

Estimated Cost: - Rs 489482 /- only

Earnest Money : - Rs. 10000 /-only

Time- One Month

S.No.	Sub head and items of work	Qty.		Rate	Unit	Amount	
1	2	3		In figure	In words	6	
						7	
1	<p>Cutting in earth work in all heights and depths in all kinds of soil including saturated soil comprising of pick, jumper, blasting work both in soft and hard rock with chiseling/ wedging out of rock (where blasting is prohibited) and their intermediate classification of soil including, dewatering where ever required, setting to the required line, grades, side slopes trimming bottoms and level as shown on the drawing as directed by the Engineer-in-Charge at site according to HP.PWD specifications of 1990 (One thousand Nine hundred Ninety) Volume-I and sorting out useful/un-useful materials and stacking the same in all leads and lifts and transportation of the unuseful materials for filling in road ways, embankments for grades improvements and leveling to the required grades and then disposing of surplus excavated earth in acquired width of road or on approved dumping sites through all modes of transportation including head load , animal load or mechanical means along with its leveling fine dressing and all labour , machineries, materials, tools equipments and safety measures and incidentals necessary to complete the work by mechanized means and labour (if any required). the cost of useful materials such as stones,shingles,aggregates and slates shall be sorted out and stacked along road side,which shall not be less than one tenth of JW,one sixth of SR and one third of HR.= 207.58 Cum Qty. which shall be proportionately increase/decrease as the qty. of earth work increase/ decreases in all cases recovered from the contracto @ 300/- (Three Hundred only) per cubic metre shall be efacted any loss to the public and private property during the course of execution shall be the absolute responsibility of the contractor which shall have to be duly compensated by him in all respects.</p>	1245.50	Cum	393.00	Rupees Three Hundred Ninety Three Only	Per cubic metre	489482.00
						Total:	489482.00
Amount Quoted by the Contractor in Percentage							

Executive Engineer,
 Shimla Rural Division,
 HPPWD Dhamsi

SCHEDULE OF QUANTITY

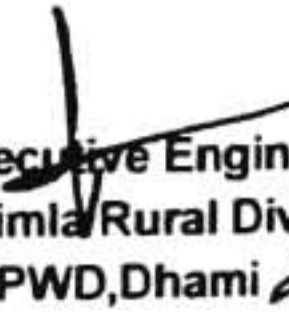
Name of Work:- Restoration of rain damages on Chanahatti Nehra Bhukho Road Km. 0/00 to 8/00 (Sh: Construction of R / Wall at RD. 5/735 to 5/751)

Estimated Cost - Rs 458295 /- only
Earnest Money - Rs. 9000 /-only
Time - One Month

S. No.	Sub head and items of work	Qty.		Rate		Unit	Amount
				figures			
1	2	3	4	5	6	7	
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	31.04	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	7245.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	56.32	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	20078.00
3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:5:10 (1 Cement : 5 coarse sand : 10 graded stone aggregate 40mm nominal size) complete including carriage of material in all leads and lifts as per direction of the Engineer in Charge.	115.84	Cum	3500.00	Rupees Three Thousand Five Hundred Only	Per cubic metre	405440.00
4	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	22.08	Cum	841.80	#NAME?	Per cubic metre	18587.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	40.85	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	6945.00
0						Total:	458295.00

Amount Quoted by the Contractor in Percentage		Rs.
--	--	------------

Note : (i) All the material will procured by the contractor him self.


 Executive Engineer
 Shimla Rural Division
 HPPWD, Dhama

SCHEDULE OF QUANTITY
Name of Work:- Restoration of rain damages on Various Roads under Sub Division Dhami (Sh: Removal of Slips, Cleaning of drains, dressing of berms at various RDs.)

Estimated Cost: - Rs 493016 /- only
 Earnest Money : - Rs. 10000 /-only

Time: - One Month

S. No.	Sub head and Items of work	Qty.	Unit	Rate		Amount
				figures	figures	
1	Removal of land slides slip clearance Removal of land slides in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto all leads and lifts as technical specifications 302.3.5 and 1611 as per the directions of Engineer-in-Charge.	1652.80	Cum	95.00	Rupees Ninety Five Only	157016.00
2	Maintenance of Culverts, Maintenance of Hume pipe Culvert by way of Cleaning, Cleaning, Erosion repair, repairs to cracks, parapet wall and protection work as per the directions of Engineer in Charge & as per drawing and technical specification Clause 1908	25.00	Nos.	1600.00	Rupees One Thousand Six Hundred Only	40000.00
3	Maintenance of Earthen shoulder (stripping of excess soil) . Stripping excess soil from the shoulder surface to achieve the approved level and compacting with plate compactor at OMC as per drawings and Technical Specification Clause 1903 as per the direction of Engineer-in-Charge	8000.00	Sqm	18.00	Rupees Eighteen Only	144000.00
4	The maintenance of drains include erosion, repair, clearing, cleaning, reshaping, regrading, deepening of side drains as well as catch water drains as per technical specification Clause 1907 including carriage of material upto all leads and lifts as per the direction of Engineer-in-charge.	8000.00	Rmt.	4.00	Rupees Four Only	32000.00
5	Construction of unlined surface drains of average cross-sectional area 0.40 sqm in soil to specified lines, grades, levels and dimensions. Excavated material to be used in embankment with all leads and lifts as per technical specifications as per the directions of Engineer-in-Charge including carriage of material upto all leads and lifts..	2400.00	Rmt.	50.00	Rupees Fifty Only	120000.00
0						Total:

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
 Shimla Rural Division
 HPPWD, Dhami

Schedule Of Quantity							Estimated Cost:- 1,95,981.00	
Name of Work :-Constuction of Devidhar Ambri Sheedal road km. 0/00 to 3/510 (SH:- Construction of Retaining wall at Rd. 2/586 to 2/592.50 & 2/592.50 to 2/599)							Earnest Money:- 4000.00	
							Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount	
				In figures	In words			
1	2	3	4	5		6	7	
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited) all earth work in cutting/excavation including rock excavation shall be carried, out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	7.54	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	1760	
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth.	5.98	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	2132	
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 40mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth, including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	37.96	Cum	4700.00	Rupees Four Thousand Seven Hundred Only	Per cubic metre	178412	
4	Providing and laying 100mm dia metre PVC pipe for weep holes complete of approved quality Including carriage of material within all leads and lifts.	15.75	Rmt	180.00	Rupees One Hundred Eighty Only	Per running metre	2835	
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I Including carriage of material within all leads and lifts.	12.88	Per cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	10842	
Total Rs.								195981
Amount Quoted by the Contractor in Percentage								
Note :- All the material will procured by the contractor him self								

Executive Engineer,
Shimla Rural Division,
HP.PWD, Dhamsi.

Schedule Of Quantity						Estimated Cost:- 1,99,010.00		
Name Of Work:- Construction of link road from Daud to Neen km. 0/00 to 1/00 (SH:- Formation Cutting 5/7 mtr at Rd. 0/360 to 0/400 and 0/535 to 0/580)						Earnest Money:- 4,000.00		
						Time:- One Months.		
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount	
				In figures	In words			
1	2	3	4	5	6	7	8	
	Cutting in earth work in all heights and depths in all kinds of soil including saturated soil comprising of pick, jumper, blasting work both in soft and hard rock with chiseling/ wedging out of rock (where blasting is prohibited) and their intermediate classification of soil including, dewatering where ever required, setting to the required line, grades, side slopes trimming bottoms and level as shown on the drawing as directed by the Engineer-in-Charge at site according to HP PWD specifications of 1990 (One thousand Nine hundred Ninety) Volume-1 and sorting out useful/un-useful materials and stacking the same in all leads and lifts and transportation of the unuseful materials for filling in road ways, embankments for grades improvements and leveling to the required grades and then disposing of surplus excavated earth in acquired width of road or on approved dumping sites through all modes of transportation including head load , animal load or mechanical means along with its leveling fine dressing and all labour , machineries, materials, tools equipments and safety measures and incidentals necessary to complete the work by mechanized means and labour (if any required). The cost of all useful materials such as stones , shingles, aggregates, and slates shall be sorted out and stacked along road side, which shall not be less than one tenth of the jumper work and one sixth of ballasting work (soft rock) one third of blasting work (Hard rock) 79.44 cum qty. which shall be proportionately increases/decreases as the antity of earth work increase/decrease in all cases recovered from the contractor at the rate of Rupees 300/- (Three hundred only) per cubic meter shall be effected, any loss to the public and private property during the course of execution shall be the absolute responsibility of the contractor which shall have to be duly compensated by him in all respects.	794.45	Cum	250.50	Rupees Two Hundred Fifty and Paise Fifty Only	Per cubic metre	199010	
	Total Rs.						199010	
	Amount Quoted by the Contractor in Percentage							
	Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhami.

Schedule Of Quantity

Name of Work :- Construction of road from Jalog Gadheri to Village Kandharti Ojdu Shaw Seri Km. 0/00 to 1/330 (SH:- Construction of Retaining wall at Rd. 0/260 to 274.10)

Estimated Cost:- 4,40,073.00
Earnest Money:- 10,000.00
Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate	In figures		In words		Unit	Amount
		3	4		5	6	7	8		
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings including carriage of material within all leads and lifts	12.69	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only			Per cubic metre	2962	
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth.	32.01	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only			Per cubic metre	11412	
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 40mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth, including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	79.95	Cum	5000.00	Rupees Five Thousand Only			Per cubic metre	399750	
4	Providing and laying 100mm dia metre PVC pipe for weep holes complete of approved quality Including carriage of material within all leads and lifts.	52.00	Rmt	190.00	Rupees One Hundred Ninety Only			Per running metre	9880	
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	16.07	Cum	1000.00	Rupees One Thousand Only			Per cubic metre	16070	
Total Rs.									440073	
Amount Quoted by the Contractor in Percentage										
Note :- All the material will procured by the contractor him self										

Executive Engineer,
 Shimla Rural Division,
 HP, PWD, Dhamsi

Schedule Of Quantity

Name of Work :- Construction of road from Jalog Gadheri to Village Kandharti Ojdu Shaw Seri Km. 0/00 to 1/330 (SH:- Construction of Retaining wall at Rd. 0/244.90 to 0/259)

Estimated Cost:- 4,39,313.00

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate	In figures		In words	Unit	Amount
		3	4		5	6			
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited) all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings including carriage of material within all leads and lifts	12.69	Cum	233.40		Rupees Two Hundred Thirty Three and Paise Forty Only		Per cubic metre	2962
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of slumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth.	32.01	Cum	356.50		Rupees Three Hundred Fifty Six and Paise Fifty Only		Per cubic metre	11412
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 40mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth, including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	79.95	Cum	5000.00		Rupees Five Thousand Only		Per cubic metre	399750
4	Providing and laying 100mm dia metre PVC pipe for weep holes complete of approved quality Including carriage of material within all leads and lifts.	48.00	Rmt	190.00		Rupees One Hundred Ninety Only		Per running metre	9120
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-1. Including carriage of material within all leads and lifts.	16.07	Cum	1000.00		Rupees One Thousand Only		Per cubic metre	16070
Total Rs.									439313
Amount Quoted by the Contractor in Percentage									
Note :- All the material will procured by the contractor him self									

Executive Engineer,
 Shimla Rural Division,
 HP, PWD, Dharami

Schedule Of Quantity

Name of Work :- C/O road from Jalog Himri to village Jhutnu km. 0/00 to 1/150 (SH:- Construction of Retaining wall at Rd. 0/515 to 529.10) Under BASP Head

Estimated Cost:- 4,39,693.00

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
		3	4	In figures	In words		
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited), all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings Including carriage of material within all leads and lifts.	12.69	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	2962
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth.	32.01	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	11412
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 40mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth, including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	79.95	Cum	5000.00	Rupees Five Thousand Only	Per cubic metre	399750
4	Providing and laying 100mm dia metre PVC pipe for weep holes complete of approved quality Including carriage of material within all leads and lifts.	50.00	Rmt	190.00	Rupees One Hundred Ninety Only	Per running metre	9500
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	16.07	Cum	1000.00	Rupees One Thousand Only	Per cubic metre	16070
Total Rs.							439693
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
 Shimla Rural Division,
 HP, PWD, Dhami.

Schedule Of Quantity

Name of Work :- C/O road from Jalog Himri to village Jhutnu km. 0/00 to 1/150 (SH:-
Construction of Retaining wall at Rd. 0/500 to 0/514.10) Under BASP Head

Estimated Cost:- 4,40,073.00

Earnest Money:- 10,000.00

Time:- One Months.

S No	Description of Work	No. of Qty.		Rate		Unit	Amount
		3	4	5	6		
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings including carriage of material within all leads and lifts.	12.69	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	2962
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth.	32.01	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	11412
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand : 8 graded stone aggregate 40mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	79.95	Cum	5000.00	Rupees Five Thousand Only	Per cubic metre	399750
4	Providing and laying 100mm dia metre PVC pipe for weep holes complete of approved quality Including carriage of material within all leads and lifts.	52.00	Rmt	190.00	Rupees One Hundred Ninety Only	Per running metre	9880
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD, specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	16.07	Cum	1000.00	Rupees One Thousand Only	Per cubic metre	16070
Total Rs.							
Amount Quoted by the Contractor in Percentage							440073
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dhamsi, Shimla

SCHEDULE OF QUANTITY
Name of Work:- Restoration of Rain Damages on Shimla Nalagarh Road Km. 7/00 to 22/00 (Sh: Construction B-wall at Rd. 12/050 to 12/062)

Estimated Cost - Rs 292308 /- only
 Earnest Money - Rs 6000 /-only
 Time - One Month

S. No.	Sub head and items of work	Qty.	Rate	Unit	Amount
1	2	3	4	5	6
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	21.60	233.40	Per cubic metre	5041.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out. construction of shoring and bracing. removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge	22.56	356.50	Per cubic metre	8043.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm (Twenty millimeter) nominal mix including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge	59.40	4600.00	Per cubic metre	273240.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment. wing wall. return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v) 20(H) towards drawing face complete as per drawing and technical specification Including carriage of material upto all leads and lifts as per the direction of Engineer-in-Charge	35.20	170.00	Per Running Metre	5984.00
0	Total:				292308.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer,
Shimla Rural Division,
HPPWD, Dhami

Name of Work:- Restoration of rain damages on Link road Hiranagar to Upperli Fatechi Road Km. 0/00 to 0/780 (Sh: Construction of B-wall in between Km. 0/260 to 0/275)

SCHEDULE OF QUANTITY

Estimated Cost - Rs 387120/- only
 Earnest Money - Rs 8000/-only
 Time - One Month

S. No.	Sub head and items of work	Qty.		Rate figures	Unit	Amount	
1	2	3	4	5	6	7	
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	7.50	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	1751.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	13.50	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	4812.75
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	81.00	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	372600.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	46.80	Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	7956.00
0					Total:		387120.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
 Shimla Rural Division
 HPPWD, Dhamsi

SCHEDULE OF QUANTITY

Name of Work:- Restoration of rain damages on Link road Hiranagar to Upperli Fatechi Road Km. 0/00 to 0/780 (Sh: Construction of R-Wall in between Km. 0/735 to 0/748)

Estimated Cost - Rs 498903 /- only
 Earnest Money - Rs 10000 /-only
 Time One Month

S. No.	Sub head and items of work	Qty.	Rate figures	Unit	Amount	
1	2	3	4	5	6	
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in-Charge.	18.72 Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	4369.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	25.38 Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	9048.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	103.42 Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	475732.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full width of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	34.20 Rmt.	170.00	Rupees One Hundred Seventy Only	Per Running Metre	5814.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8. (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	4.68 Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	3940.00
0					Total:	498903.00

Amount Quoted by the Contractor in Percentage Rs.

Note : (i) All the material will procured by the contractor him self.


Executive Engineer
 Shimla Rural Division
 HPPWD, Dhamsi

Schedule Of Quantity

Name Of Work :- Restoration of Rain damage on Shoghi Salana Sari road km. 0/00 to 12/200 (SH:- Removal of Slips at various Rds)

Estimated Cost:- 4,95,850.00
 Earnest Money:- 10,000.00
 Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611. The rate including octroi, royalty, Malkana toll tax, GST or any other taxes inputfor or output by this contract shall be payable by the contractor and Government shall not entetain any claim whatsoever in this respect of the same.	5509.44	Cum	90.00	Rupees Ninety Only	Per Cubic Metre	495850
Total Rs.							495850
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
 Shimla Rural Division,
 HP, PWD, Dhamsi. 

Schedule Of Quantity

Estimated Cost:- 4,79,155.00

Name Of Work :- R/R damages on various roads under Shoghi Sub Division (SH:- Removal of Slips at various roads & various Rds)

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Removal of landslides /slip clearance. Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in a left up to 1.5 metre and land upto 1000 meter as per technical specification 302.3.5 and 1611. The rate including octroi, royalty, Malkana toll tax, GST or any other taxes inputfor or output by this contract shall be payable by the contractor and Government shall not entetain any claim whatsoever in this respect of the same.	5323.94	Cum	90.00	Rupees Ninety Only	Per Cubic Metre	479155
Total Rs.							479155
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhamsi



Schedule Of Quantity

**Name of Work :- Construction of Devidhar Sheedal via Ambri road km. 0/00 to 3/510
(SH:- C/O Wire crate R/wall at Rd, 3/150 to 3/165)**

Estimated Cost:- 4,63,823.00
Earnest Money:- 10,000.00
Time:- One Months.

S.No	Description of Work	No. of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5		6	7
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true to lines, grades, side slopes, width, camber super-elevation and level as shown on the drawings including carriage of material within all leads and lifts.	16.20	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	3781
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth.	10.80	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	3850
3	Providing and laying of boulder apron laid in wire crates with 4mm dia G.I. wire conforming to IS:280 and IS: 4826 in 100mmx100mm mesh (woven diagonally) including 10 per cent extra for laps and joints laid with stone boulders weighing not less than 25Kg each as per drawing and technical specifications Clause 1301 including hauling of material in all leads and lifts as per the entire satisfaction and direction of Engineer-in-Charge.	129.60	Cum	3520.00	Rupees Three Thousand Five Hundred Twenty Only	Per Cubic Metre	456192
Total Rs.							463823
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

~~Executive Engineer,~~
 Shimla Rural Division,
 HP, PWD, Dhamsi

Schedule Of Quantity						Estimated Cost:- 2,50,164.00	
Name Of Work :- Restoration of rain Damages on Chaba Makarcha road Km 0/000 to 1/500. (Construction of R/wall at RD 0/570 to 0/585)						Earnest Money:- 7,600.00	
						Time:- One Months.	
S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Excavation in earth work in hilly area in all heights and depths in all kind of soil by manual/mechanical means including saturated soil comprising of mixed soil, ordinary rock and hard rock all work of rock cutting by blasting shall be carried out by taking all necessary precautions against soil erosion, damage to hill side, water pollution, etcetra and to protect stability of hill side track shall be excavated with chiseling and wedging out rock (where blasting is prohibited). all earth work in cutting/excavation including rock excavation shall be carried out true	14.10	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	Per cubic metre	3291
2	Earth work in excavation for structures as per drawing and technical specification clauses 305.1 including setting out, construction of shoring bracing removal of stumps and other deleterious material and disposal up to lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material up to 3m depth. Including	5.85	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	Per cubic metre	2086
3	Providing and laying cement concrete 1:4:8 (1 cement : 4 Sand :8 graded stone aggregate 20 mm nominal size) and curing complete excluding the cost of form work in Foundation and plinth. including carriage of material The rate including octroi, royalty, Malkana toll tax, GST or any other taxes input for or output by this contract shall be payable by the contractor and Government shall not entertain any claim whatsoever in this respect of the same.	49.95	Cum	4600.00	Rupees Four Thousand Six Hundred Only	Per cubic metre	229770
4	Providing weapholes in brick masonry/stone masonry/plain reinforced concrete abutment, wing wall, return wall with 100mm dia PVC pie extending through the full with of the structures with slop of 1 (v):20(H) towards drawing face complete as per drawing and technical	24.50	Rmt.	180.00	Rupees One Hundred Eighty Only	Per running Metre	4410
5	Back filling filling behind abutment wing wall and retaining wall, and Breast walls complete including carriage of material within all leads and lifts and as per HP.PWD., specifications of 1990 volume-I. Including carriage of material within all leads and lifts.	12.60	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	Per cubic metre	10607
Total Rs.							250164
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP, PWD, Dhani.

Schedule Of Quantity

Estimated Cost:- 4,09,894.00

Name of Work :- Balance work G.M.S Building Anu Tehsil Suni, Distt Shimla HP (SH:- Providing , Painting , Plastering and finishing works thereof)

Earnest Money:- 10,000.00

Time:- One Months.

S.No	Description of Work	No.of Qty.		Rate		Unit	Amount
				In figures	In words		
1	2	3	4	5	6	7	8
1	Filling in plinth with sand under floors including watering, ramming, consolidating and dressing complete as per the direction of Engineer-in-charge including carriage of materials with in all leads, lifts and other incidentals..	13.57	Cum	2150.00	Rupees Two Thousand One Hundred Fifty Only	Per cubic metre	29176
2	Stone soling under floors properly hand packed filling interstices with spalls and consolidating with hand including spreading watering and rolling of binding materials moorum of earth etc. including carriage of materials all leads and lifts.	13.57	Cum	1250.00	Rupees One Thousand Two Hundred Fifty Only	Per cubic metre	16963
3	Providing and laying cement concrete 1:4:8 (one cement:four sand eight graded stone aggregate 40mm nominal size)(Forty millimetre size) mechanically mixed and vibrated and curing complete excluding cost of form work in foundation and plinth as per the direction of Engineer-in-Charge including carriage of materials within all leads, lifts and other	13.57	Cum	4800.00	Rupees Four Thousand Eight Hundred Only	Per cubic metre	65136
4	Cement concrete flooring 1:2:4 (1 cement: 2 coarse sand : 4 graded stone aggregate) finished with a floating coat of neat cement, including cement slurry, but excluding the cost of nosing of steps etc. complete. 40 mm thick with 20 mm nominal size stone aggregate	90.45	Sqm	504.64	Rupees Five Hundred Four and Paise Sixty Four Only	Per Square metre	45645
5(i)	Providing and fixing wire gauge shutters using galvanised MS wire gauge of IS gauge designation 85 g with wire of Dia 0.56 mm of Doors, windows and clerestory windows including bright finished black enameled iron hinges with with necessary screws with 40 mm thick in second class including carriage of material within all leads and lifts and as per the direction of Engineer in charges.	8.40	Sqm	3790.46	Rupees Three Thousand Seven Hundred Ninety and Paise Forty Six Only	Per Square metre	31840
(ii)	Providing and fixing anodized aluminium sliding door bolt anodized colour and shade with bolts and nuts screws etc. complete. 300x16mm (three hundred x sixteen millimetre) as per the directions of Engineer-in-Charge including carriage of materials with in all leads, lifts and other incidentals.	8.40	Sqm	3590.29	Rupees Three Thousand Five Hundred Ninety and Paise Twenty Nine Only	Per Square metre	30158
6	Providing and fixing anodized aluminium sliding door bolt anodized colour and shade with bolts and nuts screws etc. complete 300x16mm (three hundred x sixteen millimetre) as per the directions of Engineer-in-Charge including carriage of materials with in all leads, lifts and other incidentals	4.00	Nos	350.00	Rupees Three Hundred Fifty Only	Each	1400

7	Providing and fixing anodized aluminium tower bolts (barrel type) anodized transparent or dyed to required shade and colour with screws etc complete as per the directions of Engineer-in-Charge including carriage of materials with in all leads, lifts and other incidentals				Rupees NIL Only		0
i)	200x10mm (Two hundred x ten millimeter)	8.00	Nos	96.77	Rupees Ninety Six and Paise Seventy Seven Only	Each	774
ii)	100x10mm (One hundred x ten millimeter)	8.00	Nos	60.73	Rupees Sixty and Paise Seventy Three Only	Each	486
8	Providing and fixing aluminium handles anodized transparent or dyed to required colour & shade with necessary screws etc. complete as per the directions of Engineer-in-Charge including carriage of materials with in all leads, lifts and other incidentals.				Rupees NIL Only		0
i)	125 mm (One hundred x twenty five millimeter)	16.00	Nos	65.00	Rupees Sixty Five Only	Each	1040
9	15mm Cement plaster in single coat on the rough side of brick/concrete/ stone walls for interior plastering upto floor two level including arrises internal rounded angles, chamfers and/or rounded angles not exceeding 80mm in girth and finished even and smooth Cement	123.39	Sqm	250.00	Rupees Two Hundred Fifty Only	Per Square metre	30848
10	15mm Cement plaster in single coat on fair side of brick/concrete/ stone walls for interior plastering upto floor two level including arrises internal rounded angles, chamfers and/or rounded angles not exceeding 80mm in girth and finished even and smooth. Cement Mortar 1:6	123.39	Sqm	270.23	Rupees Two Hundred Seventy and Paise Twenty Three Only	Per Square metre	33344
11	6mm (Six millimeter) cement plaster to ceiling in cement mortar 1:3 (one Cement: three Sand) as per the directions of Engineer-in-Charge including carriage of materials within all leads, lifts and other incidentals	106.70	Sqm	217.25	Rupees Two Hundred Seventeen and Paise Twenty Five Only	Per Square metre	23181
12	Applying Birla white wall care putty over plaster surface after thoroughly brushing the surface free from mortar drops, dust, loose materials and other foreign matters sand papered smooth to give final matter finish to the surface complete as per the direction of Engineer-in-Charge including carriage of materials within all leads, lifts and other incidentals.	353.48	Sqm	80.00	Rupees Eighty Only	Per Square metre	28278

13	Distempering (two coats) with oil bound washable distemper of approved brand and manufacture and of required shade on undecorated wall surfaces to give an even shade over and including a priming coat with distemper primer of approved brand and manufacture after thoroughly brushing the surface free from mortar droppings and other foreign matter and also including preparing the surface even and sand papered smooth	233.63	Sqm	120.00	Rupees One Hundred Twenty Only	Per Square metre	28036
14	Finishing with apex weather proof exterior emulsion of asian paints as per manufacturers specifications:	95.36	Sqm	112.24	Rupees One Hundred Twelve and Paise Twenty Four Only	Per Square metre	10703
15	Painting wood work with Deluxe Multi Surface Paint of required shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @0.75 ltr/10 sqm of approved brand and manufacture	36.96	Sqm	120.34	Rupees One Hundred Twenty and Paise Thirty Four Only	Per Square metre	4448
16	Painting Steel work with Deluxe Multi Surface Paint to give an even shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @ 0.80 ltr/10 sqm of approved brand and manufacture	15.36	Sqm	135.42	Rupees One Hundred Thirty Five and Paise Forty Two Only	Per Square metre	2080
17	Providing plinth protection 50mm (Fifty millimetre) thick in cement concrete 1:3:6 (one Cement three sand: six Graded stone aggregated 20mm (Twenty millimetre) nominal size) mechanically mix finishing surface of concrete smooth as per the direction of Engineer-in-charge including carriage of materials with in all leads, lifts and other incidentals.	33.72	Sqm	431.73	Rupees Four Hundred Thirty One and Paise Seventy Three Only	Per Square metre	14558
	Providing under layer for plinth protection of 75mm (Seventy Five millimetre) thick (unconsolidated) bed dry brick/stone aggregated 40mm (Forty millimetre) nominal size well rammed and consolidated and grouted with fine sand including preparation of ground as per direction of Engineer-in-Charge including carriage of materials with in all leads, lifts and other incidentals.	33.72	Sqm	350.00	Rupees Three Hundred Fifty Only	Per Square metre	11802
Total Rs.							409894
Amount Quoted by the Contractor in Percentage							
Note :- All the material will procured by the contractor him self							

Executive Engineer,
Shimla Rural Division,
HP,PWD, Dhama

[Handwritten Signature]

Name of Work:- Restoration of rain damages on Link road Hiranagar to Upperli Fatechi Road Km. 0/00 to 0/780 (Sh: Construction of R-Wall in between Km. 0/480 to 0/493)

SCHEDULE OF QUANTITY

Estimated Cost - Rs 499549.00 only
 Earnest Money - Rs 10000.00 only
 Time One Month

S. No.	Sub head and items of work	Qty.	Unit	Rate figures	Unit	Amount
1	2	3	4	5	6	7
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603.1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in-Charge	18.72	Cum	233.40	Rupees Two Hundred Thirty Three and Paise Forty Only	4369.00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	25.38	Cum	356.50	Rupees Three Hundred Fifty Six and Paise Fifty Only	9148.00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	103.42	Cum	4600.00	Rupees Four Thousand Six Hundred Only	475702.00
4	Providing weapholes in brick masonry / stone masonry / plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full width of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification. Including carriage of material upto all leads and lifts as per the direction of Engineer-in-Charge.	38.00	Rmt.	170.00	Rupees One Hundred Seventy Only	6460.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material. Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge	4.68	Cum	841.80	Rupees Eight Hundred Forty One and Paise Eighty Only	3940.00
0						
Total:						499549.00

Amount Quoted by the Contractor in Percentage

Rs.

Note : (i) All the material will procured by the contractor him self.

Executive Engineer
 Shimla Rural Division
 HPPWD, Dhamsi

Restoration of rain damages on Link road Hiranagar to Upperli Fatechi Road Km. 0/00 to 0/780 (Sh: Construction of R-Wall in between Km. 0/755 to 0/768)

SCHEDULE OF QUANTITY

S. No.	Sub head and items of work	Qty.		Rate figures	Unit	Amount
1	2	3	4	5	6	7
1	Excavation in soil in Hilly Area by manual means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m and a lead upto 20 m as per drawing and Technical Specification Clause 1603 1 and other deleterious materials and disposal upto all leads and lifts as per MORD specification directed by Engineer-in Charge.	18.72	Cum	233 40	Per cubic metre	4369 00
2	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts dressing of sides and bottom and backfilling in trenches with excavated suitable material as per MORD specification directed by Engineer-in-Charge.	25.38	Cum	356 50	Per cubic metre	9048 00
3	Providing and Laying cement concrete for plain / reinforced conc. In open foundation complete as per drawing and technical specification clause-802, 803, 1202 & 1203 in Cement Concrete 1:4:8 (1 Cement : 4 sand: 8 graded stone Aggregate 20 mm nominal mix). Including carriage of material upto all leads and lifts as per the directions of Engineer-in-Charge.	103.42	Cum	4600 00	Per cubic metre	475762 00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification . Including carriage of material upto all leads and lifts as per the direction of Engineer -in-Charge.	34.20	Rmt.	170 00	Per Running Metre	5814 00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8, (I) Granular material, Including carriage of material within all leads upto leads as per the direction of Engineer-in-Charge.	4.68	Cum	841.80	Per cubic metre	3940 00
0					Total:	498903.00

Estimated Cost - Rs 498903/- only
 Earnest Money - Rs 10000/- only
 Time - One Month

Amount Quoted by the Contractor in Percentage Rs.

Note : (i) All the material will procured by the contractor him self.


 Executive Engineer
 Shimla Rural Division
 HPPWD, Dhamsi