

HIMACHAL PRADESH
PUBLIC WORK DEPARTMENT

No. PW/SD/CB/TA /2025-26-

7798

Dated:- 08/10/2025

To,


The Executive Engineer
IT Cell Nirman Bhawan Nigam Vihar,
HP PWD Shimla.

Subject:-

Regarding Uploading /Publishing Notice
Inviting tender on HPPWD website .


Enclosed please find herewith the Notice
Inviting Tender (NIT) along with schedule of quantity for uploading on HP
PWD website. This is for your kind information and necessary action at your
end please.

Encls:- NIT copy & 58 Nos copy of Schedule of quantity.


Executive Engineer
Shillai (B&R) Division
HP PWD Shillai.

CERTIFICATE

Certified that the tenders of works, called vide this office letter No. PW-SD-CB-TA-2025-26-7289-97 dated: 8/10/25 are urgent nature.


Executive Engineer
Shillai (B&R) Division
HP PWD Shillai.

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDER**

Short terms Sealed percentage rate tender on form PWD 6, 7 & 8 are invited by the Executive Engineer Shillai, Division HP, PWD on behalf of governor of Himachal Pradesh for the following works from the approved and eligible contractors enlisted in HP PWD. So as to reach in this office as per time schedule given below.

1	Date of receipt of application of tenders forms:-	15.10.2025 at 12:00 AM, up to 04:00 PM				
2	Date of issue/ sale of tender Forms:-	16.10.2025 at 10:00 AM, up to 12:30 PM				
3	Date of receipt of tender Forms :-	16.10.2025 at 02:00 PM, up to 03:30 PM				
4	Date of opening of tender:-	16.10.2025 at 04.00 PM.				
Job No.	Name of work	Estimated Cost	Earnest Money	Time of period	Cost of form	Eligible of class of Contractor
1	Restoration of Rain Damages on Kharkan Deonal Road Km 0/0 to 2/225 (SH:- Construction of R/wall in R.R Masonry at RD 1/992 to 1/998) Under PDNA	99,508.00	2,000.00	One Month	350/-	" D" Class
2	Restoration of Rain Damages on Kharkan Deonal Road Km 0/0 to 2/225 (SH:- Construction of R/wall in R.R Masonry at RD 2/00 to 2/006) Under PDNA	99,426.00	2,000.00	One Month	350/-	" D" Class
3	Restoration of Rain Damages on Kharkan Deonal Road Km 0/0 to 2/225 (SH:- Construction of R/wall in R.R Masonry at RD 2/156 to 2/163) Under PDNA	99,104.00	2,000.00	One Month	350/-	" D" Class
4	Restoration of Rain Damages on Kharkan Deonal Road Km 0/0 to 2/225 (SH:- Construction of R/wall in R.R Masonry at RD 2/149 to 2/155) Under PDNA	99,426.00	2,000.00	One Month	350/-	" D" Class
5	Restoration of Rain Damages on link road village Jaswi Km 0/0 to 2/00 (SH:- Construction of B/wall in PCC 1:4:8 at RD 0/810 to 0/819) Under PDNA	99,530.00	2,000.00	One Month	350/-	" D" Class
6	Restoration of Rain Damages on link road village Jaswi Km 0/0 to 2/00 (SH:- Construction of B/wall in PCC 1:4:8 at RD 0/803 to 0/808) Under PDNA	99,530.00	2,000.00	One Month	350/-	" D" Class
7	Restoration of Rain Damages on Shakholi to Rast Road Km 0/0 to 8/00.(SH:- Construction of B/wall in R.R Masonry at RD 5/300 to 5/310).	99,351.00	2,000.00	One Month	350/-	" D" Class
8	Restoration of Rain Damages on Shakholi to Rast Road Km 0/0 to 8/00.(SH:- Construction of B/wall in R.R Masonry at RD 5/312 to 5/322).	99,661.00	2,000.00	One Month	350/-	" D" Class
9	Restoration of Rain Damages on Solan Meenus Road Km 110/00 to 128/325 (SH:- Construction of R/wall in PCC 1:4:8 at RD 121/165 to 121/169)Under PDNA	98,740.00	2,000.00	One Month	350/-	" D" Class
10	Restoration of Rain Damages on Solan Meenus Road Km 110/00 to 128/325 (SH:- Construction of R/wall in PCC 1:4:8 at RD 121/169 to 121/174)Under PDNA	99,274.00	2,000.00	One Month	350/-	" D" Class
11	Restoration of Rain Damages on Solan Meenus Road Km 110/00 to 128/325 (SH:- Construction of R/wall in PCC 1:4:8 at RD 121/175 to 121/179)Under PDNA	99,541.00	2,000.00	One Month	350/-	" D" Class
12	Restoration of Rain Damages on Solan Meenus Road Km 110/00 to 128/325 (SH:- Construction of R/wall in PCC 1:4:8 at RD 121/180 to 121/184)Under PDNA	99,274.00	2,000.00	One Month	350/-	" D" Class
13	Restoration of Rain Damages on Solan Meenus Road to S.C. Basti Panog Km 0/00 to 1/400 (SH:- Construction of R/wall in R.R Masonry at RD 00/96 to 0/100)Under PDNA	98,164.00	2,000.00	One Month	350/-	" D" Class


14	Restoration of Rain Damages on Solan Meenus Road to S.C. Basti Panog Km 0/00 to 1/400 (SH:- Construction of R/wall in R.R Masonry at RD 00/90 to 0/094)Under PDNA	98,915.00	2,000.00	One Month	350/-	" D" Class
15	Restoration of Rain Damages on LPRR Road Km 97/00 to 112/167 (SH:- Construction of R/wall in R.R Masonry at RD 106/845 to 106/852) Under PDNA	99,373.00	2,000.00	One Month	350/-	" D" Class
16	Restoration of Rain Damages on Nainidhar Bhod Khadi Thumbari Road KM 0/00 to 4/100 (SH:- Construction of R/wall in R.R Masonry at RD 2/150 to 2/157)Under PDNA	99,508.00	2,000.00	One Month	350/-	" D" Class
17	Restoration of Rain Damages on Nainidhar Bhod Khadi Thumbari Road KM 0/00 to 4/100 (SH:- Construction of R/wall in R.R Masonry at RD 2/158 to 2/164)Under PDNA	99,803.00	2,000.00	One Month	350/-	" D" Class
18	Restoration of Rain Damages on Nainidhar Bhod Khadi Thumbari Road KM 0/00 to 4/100 (SH:- Construction of R/wall in R.R Masonry at RD 2/215 to 2/222)Under PDNA	99,405.00	2,000.00	One Month	350/-	" D" Class
19	Restoration of Rain Damages on Nainidhar Bhod Khadi Thumbari Road KM 0/00 to 4/100 (SH:- Construction of R/wall in R.R Masonry at RD 2/223 to 2/228)Under PDNA	99,508.00	2,000.00	One Month	350/-	" D" Class
20	Restoration of Rain Damages on LPRR Road Km 97/00 to 112/167 (SH:- Construction of R/wall in R.R Masonry at RD 106/853 to 106/859) Under PDNA	99,306.00	2,000.00	One Month	350/-	" D" Class
21	Restoration of Rain Damages on LPRR Road Km 97/00 to 112/167 (SH:- Construction of R/wall in R.R Masonry at RD 106/805 to 106/812) Under PDNA	99,545.00	2,000.00	One Month	350/-	" D" Class
22	Restoration of Rain Damages on LPRR Road Km 97/00 to 112/167 (SH:- Construction of R/wall in R.R Masonry at RD 106/813 to 106/819) Under PDNA	99,586.00	2,000.00	One Month	350/-	" D" Class
23	Restoration of Rain Damages on Ambota Kharkan Thumbari Road Km 0/0 to 7/400 (SH:- Construction of R/wall in R.R Masnory at RD 1/535 to 1/542) Under PDNA	99,586.00	2,000.00	One Month	350/-	" D" Class
24	Restoration of Rain Damages on Ambota Kharkan Thumbari Road Km 0/0 to 7/400 (SH:- Construction of R/wall in R.R Masnory at RD 1/543 to 1/549) Under PDNA	99,417.00	2,000.00	One Month	350/-	" D" Class
25	Restoration of Rain Damages on Gummath to Lani Borad Road Km 0/0 to 5/550 (SH:- Construction of R/wall in R.R Masonary at RD 1/620 to 1/627)Under PDNA	99,426.00	2,000.00	One Month	350/-	" D" Class
26	Restoration of Rain Damages on Gummath to Lani Borad Road Km 0/0 to 5/550 (SH:- Construction of R/wall in R.R Masonary at RD 1/628 to 1/634)Under PDNA	99,870.00	2,000.00	One Month	350/-	" D" Class
27	A/R & M/O LPRR road Km 97/00 to 112/167 (SH:- Providing and erecting street light mounted on a steel Circular hollow pole Between Km 106/510 to 107/000).	99,100.00	2,000.00	One Month	350/-	" D" Class
28	A/R & M/O LPRR road Km 97/00 to 112/167 (SH:- Providing and erecting street light mounted on a steel Circular hollow pole Between Km 106/000 to 106/500).	99,100.00	2,000.00	One Month	350/-	" D" Class
29	Restoration of Rain Damages on Nainidhar Bhod Khadi Thumbari Road KM 0/00 to 4/100 (SH:- Construction of R/wall in PCC 1:4:8 at RD 0/064 to 0/067)Under PDNA	99,000.00	2,000.00	One Month	350/-	" D" Class
30	Restoration of Rain Damages on Nainidhar Bhod Khadi Thumbari Road KM 0/00 to 4/100 (SH:- Construction of R/wall in PCC 1:4:8 at RD 0/068 to 0/070)Under PDNA	98,558.00	2,000.00	One Month	350/-	" D" Class
31	Restoration of Rain Damages on Nainidhar Bhod Khadi Thumbari Road KM 0/00 to 4/100 (SH:- Hiring of Excavator cum loader for removal of Slips from Various RDs)	99,900.00	2,000.00	One Month	350/-	" D" Class

32	Restoration of Rain Damages on Uprla Jarwa to Nichla Jarwa Km 0/0 to 2/00 (SH:- Construction of R/wall in PCC 1:4:8 at RD 0/950 to 0/954).	99,660.00	2,000.00	One Month	350/-	" D" Class
33	Restoration of Rain Damages on Uprla Jarwa to Nichla Jarwa Km 0/0 to 2/00 (SH:- Construction of R/wall in PCC 1:4:8 at RD 0/955 to 0/959).	99,128.00	2,000.00	One Month	350/-	" D" Class
34	Restoration of Rain Damages on Rast Manal Chunoti Road Km 0/00 to 15/135 (SH:- Construction of R/wall in R.R Masonry at RD 0/510 to 0/517).	98,080.00	2,000.00	One Month	350/-	" D" Class
35	Restoration of Rain Damages on Rast Manal Chunoti Road Km 0/00 to 15/135 (SH:- Construction of R/wall in R.R Masonry at RD 0/517 to 0/524).	98,154.00	2,000.00	One Month	350/-	" D" Class
36	Restoration of Rain Damages on Nainidhar Bhod Khadi Thumbari Road KM 0/00 to 4/100 (SH:- Construction of R/wall in PCC 1:4:8 at RD 0/365 to 0/369).	99,660.00	2,000.00	One Month	350/-	" D" Class
37	Restoration of Rain Damages on Nainidhar Bhod Khadi Thumbari Road KM 0/00 to 4/100 (SH:- Construction of R/wall in PCC 1:4:8 at RD 0/370 to 0/374).	99,926.00	2,000.00	One Month	350/-	" D" Class
38	Restoration of Rain Damages on Deothal Section (SH:- Hiring of Excavator Cum Loader for removal of slips from various Roads).	99,900.00	2,000.00	One Month	350/-	" D" Class
39	Restoration of Rain damages on Nagheta to Killor Road Km 0/0 to 16/167 (SH:- C/o B/wall in PCC 1.4.8 at RD 14/500 to 14/507).	95,619.00	2,000.00	One Month	350/-	" D" Class
40	Restoration of rain damages on Link Road Kando Dugana Shamah Pamta Km 0/0 to 5/870 (SH:- C/o of R/wall in R.R Masonry at RD 3/314 to 3/318)	97,311.00	2,000.00	One Month	350/-	" D" Class
41	Restoration of rain damages on Link Road Kando Dugana Shamah Pamta Km 0/0 to 5/870 (SH:- C/o of R/wall in R.R Masonry at RD 3/305 to 3/309)	97,311.00	2,000.00	One Month	350/-	" D" Class
42	Restoration of Rain Damages on various road Under Ronhat Section Under Meenus Sub- Division (SH:- Hiring of Excavator cum loader for removal of slips from Various RDs)	99,900.00	2,000.00	One Month	350/-	" D" Class
43	Restoration of Rain Damages on various road Under Nanidhar Section Under Meenus Sub- Division (SH:- Hiring of Excavator cum loader for removal of slips from Various RDs)	99,900.00	2,000.00	One Month	350/-	" D" Class
44	Restoration of Rain Damages on various road Under Panog Section Under Meenus Sub- Division (SH:- Hiring of Excavator cum loader for removal of slips from Various RDs).	99,900.00	2,000.00	One Month	350/-	" D" Class
45	Restoration of Rain Damages on Shilla Gundah Road Km 0/0 to 33/265 (SH:- Hiring of Excavator cum loader for removal of slips in Km 13/00 to 15/00)	99,900.00	2,000.00	One Month	350/-	" D" Class
46	Restoration of Rain Damages on Shilla Gundah Road Km 0/0 to 33/265 (SH:- Hiring of Excavator cum loader for removal of slips in Km 01/100 to 4/00)	99,900.00	2,000.00	One Month	350/-	" D" Class
47	Restoration of Rain Damages on Renuka Sataun Road Km 13/00 to 29/060 (SH:- Hiring of Excavator cum loader for removal of slips from Ambon Khala).	99,900.00	2,000.00	One Month	350/-	" D" Class
48	Restoration of Rain Damages on Renuka Sataun Road Km 13/00 to 29/060 (SH:- Hiring of Excavator cum loader for removal of slips from Km 25/100 to 28/900).	99,900.00	2,000.00	One Month	350/-	" D" Class

49	Restoration of Rain Damages on Rajpur Kandhela Road Km 0/0 to 6/406 (SH:- Hiring of Excavator cum loader for removal of slips from km 0/00 to 3/00).	99,900.00	2,000.00	One Month	350/-	" D" Class
50	Restoration of Rain Damages on Rajpur Kandhela Road Km 0/0 to 6/406 (SH:- Hiring of Excavator cum loader for removal of slips from km 3/100 to 6/405).	99,900.00	2,000.00	One Month	350/-	" D" Class
51	Restoration of Rain Damages on Millah Bakras Road Km 0/00 to 12/075(SH:- Construction of R/wall in R.R Masonry at RD 9/405 to 9/411).	99,753.00	2,000.00	One Month	350/-	" D" Class
52	Restoration of Rain Damages on Millah Bakras Road Km 0/00 to 12/075(SH:- Construction of R/wall in R.R Masonry at RD 9/412 to 9/418).	99,753.00	2,000.00	One Month	350/-	" D" Class
53	Restoration of Rain Damages on Millah Bakras Road Km 0/00 to 12/075(SH:- Construction of R/wall in PCC 1:4:8 at RD 3/600 to 3/605).	98,930.00	2,000.00	One Month	350/-	" D" Class
54	Restoration of Rain Damages on Millah Bakras Road Km 0/00 to 12/075(SH:- Construction of R/wall in PCC 1:4:8 at RD 3/606 to 3/611).	98,930.00	2,000.00	One Month	350/-	" D" Class
55	Restoration of Rain Damages on Timbi Millah Bakras Road Km 0/00 to 12/00(SH:- Construction of R/wall in R.R Masonry at RD 2/295 to 2/299).	97,972.00	2,000.00	One Month	350/-	" D" Class
56	Restoration of Rain Damages on Koti Uttrou Road Km 0/0 to 6/00 (SH:-Hiring of Excavator cum loader for removal of slips from Km 3/150 to 6/00).	99,900.00	2,000.00	One Month	350/-	" D" Class
57	Restoration of Rain Damages on Shillai Pashmi Kandiyari Road Km 0/0 to 12/00 (SH:- Hiring of Excavator cum loader for removal of slips from various RD in Km 3/00 to 6/00).	99,900.00	2,000.00	One Month	350/-	" D" Class
58	Restoration of Rain Damages on Shillai Pashmi Kandiyari Road Km 0/0 to 12/00 (SH:- Hiring of Excavator cum loader for removal of slips from various RD in Km 6/150 to 10/00).	99,900.00	2,000.00	One Month	350/-	" D" Class

Terms and conditions:-The tender documents shall be issued only to these contractors firms who fulfill the following criteria and submit the following documents with the application.


- 1 The Earnest money for the above works should be submitted with applications for the purchase of the tender documents.
- 2 The contractors should quote the % rate of overall item in the tender both in figures and words.
- 3 Income Tax and GST No. latest clearance certificate.
- 4 The contractors/firms shall accompany his enlistment /renewal and EPF with his application.
- 5 The Executive Engineer reserves the right to accept / rejected any tender/applications or all tenders without assigning any reason.


Executive Engineer
Shillai (B&R) Division
HP PWD Shillai

Dated:- 08/10/2025

PW-SD-CB-TA-NIT-2025-26- 7789-97
Copy forwarded for information and wide publicity to:-

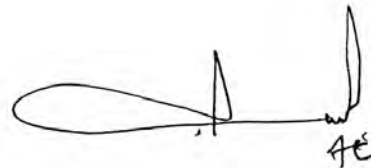
- 1 The Superintending Engineer in 12th HP PWD in Nahan
- 2 All the Assistant Engineer working under this Division.
- 3 A/B and D/B in this office.
- 4 Notice Board.



Executive Engineer
Shillai (B&R) Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:- Restoration of Rain damages on Kharkan Deonal road Km 0/0 to 2/225 (SH:- Construction of R/wall in R.R masonry at RD 1/992 to 1/208) under PDNA.						Job.-	Estimated Cost:- 99508/- Only. Earnest Money:- 2000/- Only Time Limit:- One Month	
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount		
				Figures	Words			
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.66 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2099.00		
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00		
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00		
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00		
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00		
						Total:-	99508.00	
						Select:-	Plus(+)	(.....%)
							Minus(-)	(.....%)

Name and full address of the contractor:-




 Executive Engineer
 Shillai Division
 HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of Rain damages on Kharkan Deonal road Km 0/0 to 2/225(SH:- Construction of R/wall in R.R masonry at RD 2/00 to 2/006)							Job.-		Estimated Cost:- 99426/- Only.	
Under PDNA.									Earnest Money:- 2000/- Only	
									Time Limit: - One Month	
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount				
				Figures	Words					
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.40 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2017.00				
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00				
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00				
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00				
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00				
					Total:-	99426.00				
					Select:-					
					Plus(+)	(.....%)				
					Minus(-)	(.....%)				

Name and full address of the contractor:

Name and full address of the contractor:-

Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY						Job.-	Estimated Cost:- 99104/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work:- Restoration of Rain damages on Kharkan Deonal road Km 0/0 to 2/225(SH:- Construction of R/wall in R.R masonry at RD 2/156 to 2/103) Under PDNA.								
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount		
				Figures	Words			
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	5.38 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	1695.00		
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00		
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00		
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00		
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00		
						Total:-	99104.00	
						Select:-	Plus(+)	(.....%)
							Minus(-)	(.....%)

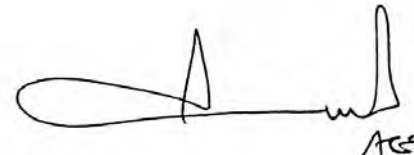
Name and full address of the contractor:-



Executive Engineer
Shillai Division
HP PWD Shillai


AC

SCHEDULE OF QUANTITY				Job.-	Estimated Cost:- 99426/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work:-Restoration of Rain damages on Kharkan Deonal road Km 0/0 to 2/225(SH:- Construction of R/wall in R.R masonry at RD 2/149 to 2/35) Under PDNA.						
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.40 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2017.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the dircion of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) mimlimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
					Total:-	99426.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


ACE


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of Rain damages on link road village Jaswi Km 0/0 to 2/00(SH:-Construction of B/wall in PCC 1:4:8 at RD 0/810 to 0/819)
 Under PDNA.

Job.-

Estimated Cost:-99530/- Only.
 Earnest Money:- 2000/- Only Time
 Limit: - One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	13.78 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	4342.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	21.33 cubic metre	Per cubic metre	4350.50	Rupees Four Thousand Three Hundred Fifty and Paise Fifty Only	92796.00
3	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	8.00 Nos.	Each	299.00	Rupees Two Hundred Ninety Nine Only	2392.00
					Total:-	99530.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


 Executive Engineer
 Shillai Division
 HP PWD Shillai


 ACE

SCHEDULE OF QUANTITY

Job.-

Estimated Cost:-99530/- Only.

Earnest Money:- 2000/- Only Time

Limit: - One Month

Name of work:-Restoration of Rain damages on link road village Jaswi Km 0/0 to 2/00(SH:-Construction of B/wall in PCC 1:4:8 at RD 0/803 to 0/808)

Under PDNA.


Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	13.78 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	4342.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	21.33 cubic metre	Per cubic metre	4350.50	Rupees Four Thousand Three Hundred Fifty and Paise Fifty Only	92796.00
3	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	8.00 Nos.	Each	299.00	Rupees Two Hundred Ninety Nine Only	2392.00
					Total:-	99530.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-

Executive Engineer

Shillai Division

HP PWD Shillai



SCHEDULE OF QUANTITY

Job.-

Estimated Cost:- 99351/- Only.
 Earnest Money:- 2000/- Only
 Time Limit: - One Month

Name of work:- Restoration of Rain damages on Shakholi to Rast road Km 0/0 to 8/00 (SH:- Construction of B/wall in R.R masonry at RD 5/300 to 5/310)

Under PDNA.

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	23.20 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	7310.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	2.20 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	8690.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.800 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	82110.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	4.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	1241.00
					Total:-	99351.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-



Executive Engineer

Shillai Division

HP PWD Shillai

DRAFT SCHEDULE OF QUANTITY

Job.-

Estimated Cost:- 99661/- Only.
 Earnest Money:- 2000/- Only
 Time Limit: - One Month

Name of work:-Restoration of Rain damages on Shakholi to Rast road Km 0/0 to 8/00(SH:- Construction of B/wall in R.R masonry at RD 5/312 to 5/322)

Under PDNA.

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	23.20 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	7310.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	2.20 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	8690.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.800 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	82110.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	5.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	1551.00
					Total:-	99661.00

Draft Schedule of Quantity Approved for Rs. 99661/-only

bonnie
 Executive Engineer

Shillai Division

HP PWD Shillai


AE

SCHEDULE OF QUANTITY

Name of work:-Restoration of Damages onSolan Meenus road Km 110/0 to 128/325(SH:-Construction of R/wall in PCC 1:4:8 at RD 121/165 to 127/169) Under PDNA.				Job.-	Estimated Cost:-98740/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.96 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	2049.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.76 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	90630.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	3.60 cubic metre	Per cubic metre	793.97	Rupees Seven Hundred Ninety Three and Paise Ninety Seven Only	2858.00
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	12.00 Nos.	Each	266.90	Rupees Two Hundred Sixty Six and Paise Ninety Only	3203.00
					Total:-	98740.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-




Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Job.-	Estimated Cost:-99274/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work:-Restoration of Damages on Solan Meenus road Km 110/0 to 128/325(SH:-Construction of R/wall in PCC 1:4:8 at RD 121/165 to 127/174) Under P.DNA	

Sr. No.	Sub-Head and Item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.96 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	2049.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.76 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	90630.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	3.60 cubic metre	Per cubic metre	793.97	Rupees Seven Hundred Ninety Three and Paise Ninety Seven Only	2858.00
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	14.00 Nos.	Each	266.90	Rupees Two Hundred Sixty Six and Paise Ninety Only	3737.00
					Total:-	99274.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-




Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY					Job.-	Estimated Cost:-99541/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work:-Restoration of Damages on Solan Meenus road Km 110/0 to 128/325(SH:-Construction of R/wall in PCC 1:4:8 at RD 121/175 to 127/179) under PDNA.						
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.96 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	2049.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.76 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	90630.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	3.60 cubic metre	Per cubic metre	793.97	Rupees Seven Hundred Ninety Three and Paise Ninety Seven Only	2858.00
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	15.00 Nos.	Each	266.90	Rupees Two Hundred Sixty Six and Paise Ninety Only	4004.00
					Total:-	99541.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


AE


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of Damages onSolan Meenus road Km 110/0 to 128/325(SH:-Construction of R/wall in PCC 1:4:8 at RD 121/180 to 121/184) under PDNA.

Job.-

Estimated Cost:-99541/- Only.
Earnest Money:- 2000/- Only Time
Limit: - One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.96 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	2049.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.76 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	90630.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) mimilimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	3.60 cubic metre	Per cubic metre	793.97	Rupees Seven Hundred Ninety Three and Paise Ninety Seven Only	2858.00
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	14.00 Nos.	Each	266.90	Rupees Two Hundred Sixty Six and Paise Ninety Only	3737.00
					Total:-	99274.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-

Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of rain damages to Solan Meenus road to S.C. Basti Panog Km 0/0 to 1/400(SH:-Construction of R/wall in RR Masonry at 0/096 to 0/100) Under PDNA				Job.-	Estimated Cost:- 98164/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	9.04 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2849.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	2.33 cubic metre	Per cubic metre	4415.20	Rupees Four Thousand Four Hundred Fifteen and Paise Twenty	10287.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the dircion of the Engineer-in-Charge.	24.400 cubic metre	Per cubic metre	3381.20	Rupees Three Thousand Three Hundred Eighty One and Paise Twenty	82501.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) mimlimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	3.12 cubic metre	Per cubic metre	810.00	Rupees Eight Hundred Ten Only	2527.00
					Total:-	98164.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai


AE

SCHEDULE OF QUANTITY

SCHEDULE OF QUANTITY					Job.-	Estimated Cost:- 98915/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work:-Restoration of rain damages to Solan Meenus road to S.C. Basti Panog Km 0/0 to 1/400(SH:-Construction of R/wall in RR Masonry at 0/090 to 0/094) under PDNA.							
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	9.04 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2849.00	
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	2.50 cubic metre	Per cubic metre	4415.20	Rupees Four Thousand Four Hundred Fifteen and Paise Twenty	11038.00	
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	24.400 cubic metre	Per cubic metre	3381.20	Rupees Three Thousand Three Hundred Eighty One and Paise Twenty	82501.00	
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	3.12 cubic metre	Per cubic metre	810.00	Rupees Eight Hundred Ten Only	2527.00	
					Total:-	98915.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-

Executive Engineer
Shillai Division
HP PWD Shillai

ATC


SCHEDULE OF QUANTITY

Name of work:-Restoration of Rain damages on LPRR road KM 97/00 to 112/167(SH:- Construction of R/wall in R.R masonry at RD 106/845 to 852) Under PANA.				Job.-	Estimated Cost:- 99373/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
---	--	--	--	-------	--

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. Including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	5.25 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	1654.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge.	11.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3412.00
					Total:-	99373.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


AE


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Job.-

Estimated Cost:- 99508/- Only.


Earnest Money:- 2000/- Only


Time Limit:- One Month

Name of work:- Restoration of Rain damages on Nanidhar Bhad Khadi Thumbari road KM 0/00 to 4/100(SH:- Construction of R/wall in R.R masonry at RD 2/150 to 2/157) Under PDNA.

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.66 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2099.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).Including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
					Total:-	99508.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


AC


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

SCHEDULE OF QUANTITY					Job.-	Estimated Cost:- 99803/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work:-Restoration of Rain damages on Nanidhar Bhad Khadi Thumbari road KM 0/00 to 4/100(SH:- Construction of R/wall in R.R masonry at RD 2/158 to 2/164) Under PDNA.							
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	5.63 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	1774.00	
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00	
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00	
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00	
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	12.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3722.00	
					Total:-	99803.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	


Name and full address of the contractor:-




Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY				Job.-	Estimated Cost:- 99405/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work:-Restoration of Rain damages on Nanidhar Bhad Khadi Thumbari road KM 0/00 to 4/100(SH:- Construction of R/wall in R.R masonry at RD 2/215 to 2/222) Under PDNA.						
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. Including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	5.38 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	1695.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).Including carriage of materials in all leads and lifts as per the dircion of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) mimlmetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	11.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3412.00
					Total:-	99414.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-




Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:- Restoration of Rain damages on Nanidhar Bhad Khadi Thumbari road KM 0/00 to 4/100(SH:- Construction of R/wall in R.R masonry at
 Rs 2/223 to 2/228) Under PDNA

Job.-

Estimated Cost:- 99508/- Only.

Earnest Money:- 2000/- Only

Time Limit:- One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.66 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2099.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
					Total:-	99508.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-

Executive Engineer

Shillai Division

HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:- Restoration of Rain damages on LPRR road KM 97/00 to 112/167(SH:- Construction of R/wall in R.R masonry at RD 106/853 to 106/859) Under PDNA.

Job.-

Estimated Cost:- 99306/- Only.

Earnest Money:- 2000/- Only

Time Limit: - One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.02 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	1897.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
					Total:-	99306.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-



Executive Engineer

Shillai Division

HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of Rain damages on LPRR road KM 97/00 to 112/167(SH:- Construction of R/wall in R.R masonry at RD 106/805 to 106/812) under P DNA.

Job.-

Estimated Cost:- 99545/- Only.

Earnest Money:- 2000/- Only

Time Limit: - One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.78 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2136.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
					Total:-	99545.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-



Executive Engineer

Shillai Division

HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of Rain damages on LPRR road KM 97/00 to 112/167(SH:- Construction of R/wall in R.R masonry at RD 106/813 to 108/819) Under PDNA-

Job.-


Estimated Cost:- 99586/- Only.

Earnest Money:- 2000/- Only

Time Limit: - One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.91 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2177.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
				Total:-		99586.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-



 Executive Engineer

Shillai Division

HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of Rain damages on Ambota Kharkan Thunbari road Km 0/0 to 7/400(SH:- Construction of R/wall in R.R masonry at RD 1535 to 1/542) *under PDNA.*

Job:-

Estimated Cost:- 99586/- Only.

Earnest Money:- 2000/- Only

Time Limit: - One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.91 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2177.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the dircion of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) mimilimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
					Total:-	99586.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-

[Signature]
Ac

[Signature]
Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:- Restoration of Rain damages on Ambota Kharkan Thunbari road Km 0/0 to 7/400(SH:- Construction of R/wall in R.R masonry at RD 1543 to 1/549) under PDNA.

Job:-

Estimated Cost:- 99417/- Only.
Earnest Money:- 2000/- Only
Time Limit: - One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.40 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2017.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
					Total:-	99426.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


AC


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY


Name of work:-Restoration of Rain damages on Gummath to Lani Borad road Km 0/0 to 5/550(SH:- Construction of R/wall in R.R masonry at RD 1/620 to 1/627) Under PDNA.

Job.-

Estimated Cost:- 99426/- Only.
Earnest Money:- 2000/- Only
Time Limit: - One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.40 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2017.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the dircion of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) mimlilmetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
				Total:-		99426.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-



Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of Rain damages on Gummah to Lani Borad road Km 0/0 to 5/550(SH:- Construction of R/wall in R.R masonry at RD				Job.-	Estimated Cost:- 99870/- Only.
28to 1/634) <u>under PDNA</u>					Earnest Money:- 2000/- Only
					Time Limit: - One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material, including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	7.81 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	2461.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3950.00	Rupees Three Thousand Nine Hundred Fifty Only	6083.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3450.00	Rupees Three Thousand Four Hundred Fifty Only	81248.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	310.15	Rupees Three Hundred Ten and Paise Fifteen Only	3102.00
					Total:-	99870.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


AE



Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-A/R & M/O LPRR road Km 97/00 to 112/167 (Sh:- Providing and erecting street light mounted on a steel circular hollow pole Between Km 106/510 to 107/000)				Job.-	Estimated Cost:- 99100/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earth work in excavation for structure as per drawing and technical specification clause 3:35.1 including cutting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 metres dressing of sides and bottom and back filling in trenches with excavated suitable material, including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	3.38 cubic metre	Per cubic metre	290.06	Rupees Two Hundred Ninety and Paise Six Only	980.00
2	Providing and laying plain cement concrete 1-24 and curing completed including the cost of form work for plain/reinforced concrete complete as per the technical specifications etc including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	3.38 cubic metre	Per cubic metre	6200.00	Rupees Six Thousand Two Hundred Only	20956.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	4.000 cubic metre	Per cubic metre	19290.90	Rupees Nineteen Thousand Two Hundred Ninety and Paise Ninety Only	77164.00
					Total:-	99100.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)


Name and full address of the contractor:-

Executive Engineer
Shillai Division
HP PWD Shillai


A E

SCHEDULE OF QUANTITY					Job.-	Estimated Cost:- 99100/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work:-A/R & M/O LPRR road Km 97/00 to 112/167 (Sh:- Providing and erecting street light mounted on a steel circular hollow pole Between Km 106/00 to 106/500)							
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earth work in excavation for structure as per drawing and technical specification clause 3:35.1 including cutting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 metres dressing of sides and bottom and back filling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	3.38 cubic metre	Per cubic metre	290.06	Rupees Two Hundred Ninety and Paise Six Only	980.00	
2	Providing and laying plain cement concrete 1-24 and curing completed including the cost of form work for plain/reinforced concrete complete as per the technical specifications etc including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	3.38 cubic metre	Per cubic metre	6200.00	Rupees Six Thousand Two Hundred Only	20956.00	
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	4.000 cubic metre	Per cubic metre	19290.90	Rupees Nineteen Thousand Two Hundred Ninety and Paise Ninety Only	77164.00	
					Total:-	99100.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer

Shillai Division

HP PWD Shillai



SCHEDULE OF QUANTITY

Job:-

Estimated Cost:-99000/- Only.


Earnest Money:- 2000/- Only Time

Limit:- One Month

of work:-Restoration of Damages on Nanidhar Bhad Khadi Thumbari road Km 0/0 to 4/00(SH:-Construction of R/wall in PCC 1:4:8 at RD 0/064 to 0.067)

Sr. No.	Sub-Head and Item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material, including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	4.79 cubic metre	Per cubic metre	298.35	Rupees Two Hundred Ninety Eight and Paise Thirty Five Only	1429.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.52 cubic metre	Per cubic metre	4350.50	Rupees Four Thousand Three Hundred Fifty and Paise Fifty Only	89272.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts and carriage of material as per the direction of the Engineer Incharge.	6.72 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	5309.00
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	10.00 Nos.	Each	299.00	Rupees Two Hundred Ninety Nine Only	2990.00
					Total:-	99000.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai


1E

Job:- Restoration of Rain damages on Nanidhar Bhod Khadi Thumbari road KM 0/00 to 4/150(SH:-Construction of R/wall in PCC 1:4:8 at RD 0/038 to 0/070)


SCHEDULE OF QUANTITY

Job.- Estimated Cost:- ~~99649/-~~ ⁹⁸⁵⁵⁸ Only.
 Earnest Money:- 2000/- Only Time Limit:- One Month

Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	4.79 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	1410.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer-In- charge.	20.52 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	89582.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	6.55 cubic metre	Per cubic metre	789.40	Rupees Seven Hundred Eighty Nine and Paise Forty Only	5171.00
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	9.00 Nos.	Each	266.15	Rupees Two Hundred Sixty Six and Paise Fifteen Only	2395.00
				Total:-		98558.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

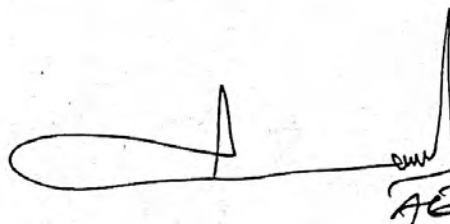
Name and full address of the contractor:-


AE



 Executive Engineer
 Shillai Division
 HP PWD Shillai

SCHEDULE OF QUANTITY						
Name of work: Restoration of Rain Damages on Nanidhar Bhod Khadi Thumbari road Km 0/0 to 4/150 (SH:- Hiring of Excavator cum loader for removal of slips from Various RDs)				Job.-	Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, diesel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00
					Total:-	99900.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-




AE


Executive Engineer
B & R Division
HP PWD Shillai

Name of work:-Restoration of Damages on Uprla Jarwa to Nichala Jarwa Km 0/0 to 2/00(SH:-Construction of R/wall in PCC1:4:8 at RD 0/950 to 0/904)							Job: 32	Estimated Cost:-99660/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount			
				Figures	Words				
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	13.90 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety four and Paise Thirty Five Only	4091.00			
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802.803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	21.06 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	91940.00			
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts and carriage of material as per the direction of the Engineer Incharge.	1.90 cubic metre	Per cubic metre	789.40	Rupees Seven Hundred Eighty Nine and Paise Forty Only	1500.00			
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	8.00 Nos.	Each	266.15	Rupees Two Hundred Sixty Six and Paise Fifteen Only	2129.00			
					Total:-	99660.00			
				Select:-	Plus(+)	(.....%)			
					Minus(-)	(.....%)			

Name and full address of the contractor:-

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of Damages on Uprla Jarwa to Nichala Jarwa Km 0/0 to 2/00/SH:-Construction of R/wall in PCC 1:4:8 at RD 0/955 to 0/959)				Job.- 33		Estimated Cost:-99128/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	13.90 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	4091.00	
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	21.06 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	91940.00	
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts and carriage of material as per the direction of the Engineer Incharge.	1.90 cubic metre	Per cubic metre	789.40	Rupees Seven Hundred Eighty Nine and Paise Forty Only	1500.00	
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	6.00 Nos.	Each	266.15	Rupees Two Hundred Sixty Six and Paise Fifteen Only	1597.00	
					Total:-	99128.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	


Name and full address of the contractor:-

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY					Job.- 34	Estimated Cost:- 98080/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work:-Restoration of Rain damages on Rast Manal Chunoti road Km 0/00 to 15/135(SH:- Construction of R/wall in R.R masonry at RD 0/510 to 0/517)							
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.66 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	1960.00	
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3850.00	Rupees Three Thousand Eight Hundred Fifty Only	5929.00	
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the dircion of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3381.20	Rupees Three Thousand Three Hundred	79627.00	
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) mimlimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00	
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	12.00 Nos.	Each	299.00	Rupees Two Hundred Ninety Nine Only	3588.00	
					Total:-	98080.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY


Name of work:- Restoration of Rain damages on Rast Manal Chunoti road Km 0/00 to 15/135(SH:- Construction of R/wall in R.R masonry at RD 0/517 to 0/524)

Job.- 35

Estimated Cost:- 98154/- Only.
Earnest Money:- 2000/- Only
Limit:- One Month


Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	6.91 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	2034.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.PCC 1:6:12(One cement: Six Sand: Twelve graded stone aggregate)40mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	1.54 cubic metre	Per cubic metre	3850.00	Rupees Three Thousand Eight Hundred Fifty Only	5929.00
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	23.550 cubic metre	Per cubic metre	3381.20	Rupees Three Thousand Three Hundred	79627.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	8.83 cubic metre	Per cubic metre	790.00	Rupees Seven Hundred Ninety Only	6976.00
5	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	12.00 Nos.	Each	299.00	Rupees Two Hundred Ninety Nine Only	3588.00
					Total:-	98154.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai


SCHEDULE OF QUANTITY						Job - 36	Estimated Cost:-99660/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work:-Restoration of Damages on Nanidhar Bhad Khadi Thumbari road Km 0/0 to 4/150 (SH:-Construction of R/wall in PCC1:4:8 at RD 0/365 to 0/369).								
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount		
				Figures	Words			
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	13.90 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	4091.00		
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	21.06 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	91940.00		
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	1.90 cubic metre	Per cubic metre	789.40	Rupees Seven Hundred Eighty Nine and Paise Forty Only	1500.00		
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	8.00 Nos.	Each	266.15	Rupees Two Hundred Sixty Six and Paise Fifteen Only	2129.00		
					Total:-	99660.00		
				Select:-	Plus(+)	(.....%)		
					Minus(-)	(.....%)		

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai


SCHEDULE OF QUANTITY					Job.- 37	Estimated Cost:- 99926/- Only
Name of work:- Restoration of Damages on Nanidhar Bhad Khadi Thumbari road Km 0/0 to 4/150 (SH:- Construction of R/wall in PCC 1:4:8 at RD 0/370 to 0/374)						Earnest Money:- 2000/- Only Time Limit:- One Month
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	13.90 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	4091.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate) 25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	21.06 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	91940.00
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts and carriage of material as per the direction of the Engineer Incharge.	1.90 cubic metre	Per cubic metre	789.40	Rupees Seven Hundred Eighty Nine and Paise Forty Only	1500.00
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	9.00 Nos.	Each	266.15	Rupees Two Hundred Sixty Six and Paise Fifteen Only	2395.00
					Total:-	99926.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai


SCHEDULE OF QUANTITY					Job.- 38	Estimated Cost:- 99900- Only, Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work: Restoration of Rain Damages on Deothal Section (SH:- Hiring of Excavator cum loader for removal of slips from Various Road)						
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, diesel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00
					Total:-	99900.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai


SCHEDULE OF QUANTITY						Job.- 37	Estimated Cost:- 95619/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work:-Restoration of Damages on Nagheta to Killor road Km 0/0 to 16/167(SH:-Construction of B/wall in PCC 1:4:8 at RD 14/500 to 14/507)							
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	10.08 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	2967.00	
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.44 cubic metre	Per cubic metre	4350.60	Rupees Four Thousand Three Hundred Fifty and Paise Sixty Only	88926.00	
3	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	14.00 Nos.	Each	266.15	Rupees Two Hundred Sixty Six and Paise Fifteen Only	3726.00	
					Total:-	95619.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai


SCHEDULE OF QUANTITY						Job.- 40	Estimated Cost:- 97311/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work:-Restoration of rain damages to Link road Kando Dugana Shamah Pamta Km 0/0 to 5/870(SH:-Construction of R/wall in RR Masonry at RD 3/314 to 3/318)								
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount		
				Figures	Words			
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	16.51 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only	5202.00		
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.03 cubic metre	Per cubic metre	4350.50	Rupees Four Thousand Three Hundred Fifty and Paise Fifty Only	87141.00		
3	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	16.00 Nos.	Each	310.50	Rupees Three Hundred Ten and Paise Fifty Only	4968.00		
					Total:-	97311.00		
				Select:-	Plus(+)	(.....%)		
					Minus(-)	(.....%)		

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai


SCHEDULE OF QUANTITY					
Name of work:-Restoration of rain damages to Link road Kando Dugana Shamah Pamta Km 0/0 to 5/870(SH:-Construction of R/wall in RR Masonry at RD 3/305 to 3/309)				Job.- 41	Estimated Cost:- 97311/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in	
				Figures	Words
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. Including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, Including all incidental charges.	16.51 cubic metre	Per cubic metre	315.10	Rupees Three Hundred Fifteen and Paise Ten Only
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.03 cubic metre	Per cubic metre	4350.50	Rupees Four Thousand Three Hundred Fifty and Paise Fifty Only
3	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	16.00 Nos.	Each	310.50	Rupees Three Hundred Ten and Paise Fifty Only
				Total:-	97311.00
				Select:-	Plus(+)
					(.....%)
					Minus(-)
					(.....%)

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai


SCHEDULE OF QUANTITY					Job.- 42		Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work: Restoration of Rain Damages on Various road Under Ronhat Section Under Meenus Sub-Division(SH:- Hiring of Excavator cum loader for removal of slips from Various RDs)								
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount		
				Figures	Words			
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, disel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00		
				Total:-		99900.00		
				Select:-	Plus(+)	(.....%)		
					Minus(-)	(.....%)		

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai


SCHEDULE OF QUANTITY						Job.- 43		Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work: Restoration of Rain Damages on Various road Under Nanidhar Section Under Meenus Sub-Division(SH:- Hiring of Excavator cum loader for removal of slips from Various RDs)									
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount			
				Figures	Words				
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, diesel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00			
					Total:-	99900.00			
				Select:-	Plus(+)	(.....%)			
					Minus(-)	(.....%)			

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai


SCHEDULE OF QUANTITY				Job.- 44		Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work: Restoration of Rain Damages on Various road Under Panog Section Under Meenus Sub-Division(SH:- Hiring of Excavator cum loader for removal of slips from Various RDs)							
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, diesel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00	
					Total:-	99900.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai


SCHEDULE OF QUANTITY				Job.- 45		Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work: Restoration of Rain Damages on Shilla Gundah road Km 0/0 to 33/265(SH:- Hiring of Excavator cum loader for removal of slips In km 13/0 to 15/00)							
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, diesel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00	
				Total:-		99900.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shilla


SCHEDULE OF QUANTITY						Job.- 46	Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work: Restoration of Rain Damages on Shilla Gundah road Km 0/0 to 33/265(SH:- Hiring of Excavator cum loader for removal of slips In km 1/100 to 4/00)							
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, diesel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00	
					Total:-	99900.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai


SCHEDULE OF QUANTITY				Job.-417		Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work: Restoration of Rain Damages on Renuka Sataun road Km 13/0 to 29/060(SH:- Hiring of Excavator cum loader for removal of slips from Ambon Khala)							
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, diesel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00	
				Total:-		99900.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillong

SCHEDULE OF QUANTITY						Job. - 48	Estimated Cost:- 99900/- Only, Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work: Restoration of Rain Damages on Renuka Sataun road Km 13/0 to 29/060(SH:- Hiring of Excavator cum loader for removal of slips from Km25/100 to 28/900)							
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, diesel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00	
				Total:-		99900.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai


SCHEDULE OF QUANTITY					Job.-49	Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work: Restoration of Rain Damages on Rajpur Kandhela road Km 0/0 to 6/405(SH:- Hiring of Excavator cum loader for removal of slips from Km 0/0 to 3/00)						
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, disel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00
					Total:-	99900.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai


SCHEDULE OF QUANTITY						Job.- 50	Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work: Restoration of Rain Damages on Rajpur Kandhela road Km 0/0 to 6/405(SH:- Hiring of Excavator cum loader for removal of slips from Km 3/100 to 6/405)							
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, diesel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00	
				Total:-		99900.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai

SCHEDULE OF QUANTITY						Job.- 51	Estimated Cost:- 99753/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work:-Restoration of Rain damages on Millah Bakras road KM 0/00 to 12/075(SH:- Construction of R/wall in R.R masonry at RD 9/405 to 9/411)							
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	13.02 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	3832.00	
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	2.70 cubic metre	Per cubic metre	4350.50	Rupees Four Thousand Three Hundred Fifty and Paise Fifty Only	11746.00	
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	24.340 cubic metre	Per cubic metre	3280.50	Rupees Three Thousand Two Hundred Eighty and Paise Fifty Only	79847.00	
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	4.08 cubic metre	Per cubic metre	779.40	Rupees Seven Hundred Seventy Nine and Paise Forty Only	3180.00	
						Total:-	98605.00
						Select:-	Plus(+)
							(.....%)
							Minus(-)
							(.....%)


Name and full address of the contractor:-


Executive Engineer

Shillai Division
HP PWD Shillai


SCHEDULE OF QUANTITY						Job.- 52	Estimated Cost:- 99753/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work:-Restoration of Rain damages on Millah Bakras road KM 0/00 to 12/075(SH:- Construction of R/wall in R.R masonry at RD 9/412 to 9/418)							
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	13.02 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	3832.00	
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	2.70 cubic metre	Per cubic metre	4350.50	Rupees Four Thousand Three Hundred Fifty and Paise Fifty Only	11746.00	
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	24.340 cubic metre	Per cubic metre	3280.50	Rupees Three Thousand Two Hundred Eighty and Paise Fifty Only	79847.00	
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	4.08 cubic metre	Per cubic metre	779.40	Rupees Seven Hundred Seventy Nine and Paise Forty Only	3180.00	
					Total:-	98605.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai


				Job.- 53		Estimated Cost:-98930/- Only.	
						Earnest Money:- 2000/- Only Time Limit: - One Month	
SCHEDULE OF QUANTITY							
Name of work:-Restoration of Rain damages on Millah Bakras road KM 0/00 to 12/075(SH:-Construction of R/wall in PCC 1:4:8 at RD3/600 to 3/605)							
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	12.95 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	3812.00	
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.85 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	91023.00	
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	2.49 cubic metre	Per cubic metre	789.40	Rupees Seven Hundred Eighty Nine and Paise Forty Only	1966.00	
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	8.00 Nos.	Each	266.15	Rupees Two Hundred Sixty Six and Paise Fifteen Only	2129.00	
					Total:-	98930.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY						Job.- 54	Estimated Cost:-98930/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work:-Restoration of Rain damages on Millah Bakras road KM 0/00 to 12/075(SH:-Construction of R/wall in PCC 1:4:8 at RD3/606 to 3/611)							
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material. including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	12.95 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	3812.00	
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	20.85 cubic metre	Per cubic metre	4365.60	Rupees Four Thousand Three Hundred Sixty Five and Paise Sixty Only	91023.00	
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	2.49 cubic metre	Per cubic metre	789.40	Rupees Seven Hundred Eighty Nine and Paise Forty Only	1966.00	
4	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification Clauses 614, 709, 1204.3.7.including carriage of materials in all leads and lifts as per direction of Engineer-in-Charge	8.00 Nos.	Each	266.15	Rupees Two Hundred Sixty Six and Paise Fifteen Only	2129.00	
					Total:-	98930.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	


Name and full address of the contractor:-


Executive Engineer
Shillai Division
HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work:-Restoration of Damages on Timbi Millah Bakras road Km 0/00 to 12/00(SH:- Construction of R/wall in R.R masonry at RD 2/295 to 2/299)						Job.- 55	Estimated Cost:- 97972/- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Sr. No.	Sub-Head and item of work	Quantity	Unit	Rate in		Amount		
				Figures	Words			
1	Earthwork in excavation in all heights and depths in all kinds of soils for structure as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal all leads dressing of sides and bottom and backfilling in trenches with excavated suitable material, including carriage of all labour equipment and material to various location through all modes of transportation in all leads and lifts, including all incidental charges.	13.40 cubic metre	Per cubic metre	294.35	Rupees Two Hundred Ninety Four and Paise Thirty Five Only	3944.00		
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification Clauses 802,803,1202 and 1203.1:4:8 (One cement: Four Sand:Eight graded stone aggregate)25mm nominal size including carriage of material in all leads and lifts as per the direction of the Engineer- In- charge.	2.06 cubic metre	Per cubic metre	4415.20	Rupees Four Thousand Four Hundred Fifteen and Paise Twenty Only	9095.00		
3	Stone masonry in cement mortar for substructure complete as per drawing & technical specification clauses 702,704,1202 and 1204 random rubble masonry (2nd Sort) in cement mortar 1:6).including carriage of materials in all leads and lifts as per the direction of the Engineer-in-Charge.	24.400 cubic metre	Per cubic metre	3381.20	Rupees Three Thousand Three Hundred Eighty One and Paise Twenty Only	82501.00		
3	Providing and laying filter media with granular crushed aggregates as per specifications to a thickness of not less than 600 (Six hundred) millimetre with smaller size towards the soil and bigger size towards the wall and providing over the entire surface behind abutment, wing wall, return wall to the full height, compacted to firm condition complete as per drawing and technical specification Clause 1204.3.8 (One thousand two hundred four point three point eight) within all leads lifts.and carriage of material as per the direction of the Engineer Incharge.	3.12 cubic metre	Per cubic metre	779.40	Rupees Seven Hundred Seventy Nine and Paise Forty Only	2432.00		
							Total:-	97972.00
						Select:-	Plus(+)	(.....%)
							Minus(-)	(.....%)

Name and full address of the contractor:-


Executive Engineer

Shillai Division

HP PWD Shillai

SCHEDULE OF QUANTITY

Name of work: Restoration of rain damages on Koti Uttrou road Km 0/0 to 6/00(SH:- Hiring of Excavator cum loader for removal of slips on from Km 3/150 to 6/00)

Job.- 56

Estimated Cost:-99900- Only.
Earnest Money:- 2000/- Only Time
Limit: -Two Months


Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, disel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00
					Total:-	99900.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai


SCHEDULE OF QUANTITY				Job.- 57		Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month	
Name of work: Restoration of Rain Damages on Shillai Pashmi Kandiyari road Km 0/0 to 12/00 (SH:- Hiring of Excavator cum loader for removal of slips from Various RD in Km 3/00 to 6/00)							
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount	
				Figures	Words		
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, disel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00	
				Total:-		99900.00	
				Select:-	Plus(+)	(.....%)	
					Minus(-)	(.....%)	

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai

SCHEDULE OF QUANTITY					Job.- 52	Estimated Cost:- 99900- Only. Earnest Money:- 2000/- Only Time Limit: - One Month
Name of work: Restoration of Rain Damages on Shillai Pashmi Kandiyari road Km 0/0 to 12/00 (SH:- Hiring of Excavator cum loader for removal of slips from Various RD in Km 6/150/00 to 10/00)						
Sr. No	Sub-Head and item of work	Quantity	Unit	Rate in		Amount
				Figures	Words	
1	Hiring of Excavator cum loader for excavation, removal of slips, removal of debris and dressing of berms with a minimum capacity of 28.00 cum (Sixty Cubic metre) per hours including cost of Services of operating staff, cost of lubrication oil, disel/petrol Kerosene oil, other consumables for running the machinery and all the taxes. including pay of operators, POL charges, maintenance or any minor or major accidents and other damages to private and Govt. property is the whole responsibility of the contractor. The work shall be executed as per the MORT specification and the direction of Engineer-in Charge.Crawling one side shell be paid to the contractor.	111.00 Hours	Per hour	900.00	Rs. Nine hundred & Nil Paise only.	99900.00
					Total:-	99900.00
				Select:-	Plus(+)	(.....%)
					Minus(-)	(.....%)

Name and full address of the contractor:-


Executive Engineer
B & R Division
HP PWD Shillai