

REGISTERED

Office of the Executive Engineer, B&R Division, HP PWD Kalpa District Kinnaur (HP)

Web:- [www.hppwd.gov.in](http://www.hppwd.gov.in) E mail:- [hp-kin@nic.in](mailto:hp-kin@nic.in)

Phone No:- 01786-226027 Fax:- 01786-226027.

No:- PW/KNR-E-Tender/2026- 11400-02  
To


Dated:- 11/2/2026

The Executive Engineer (IT Cell),  
HP.PWD. Shimla-2.

**Subject:- Publication of Tender Notice (OFFLINE )**


Enclosed please find herewith the Tender of works costing above 1.00 Lakh and upto 5.00 Lakh as given in the Notice Inviting Tender for uploading on the departmental website as per notification vide Pr. Secy. (PW) to the Govt. of Himachal Pradesh letter No. PBW(B) 1/2020 dated 16-07-2021 and even file No. 1/2024 dated 03-01-2024, 03-01-2025 and 1/2024-241828 dated 17-07-2025 and PWD-B-A0(3)/ 8/2025-300858 dated 13-11-2025. The works mentioned in the tender notice are urgent in nature and public interest.

Encl:- NIT, Schedule of Quantity  
& Certificate.

  
Executive Engineer,  
Kalpa Division,  
HP.PWD. Kalpa.

**Copy forwarded for information to:-**

1. The Superintending Engineer, 11<sup>th</sup> Circle, HP.PWD. Rampur Bushahr.
2. Copy to Drawing Branch in this office.

  
Executive Engineer,  
Kalpa Division,  
HP. PWD, Kalpa

**HP.P.W.D. TENDER NOTICE (offline)**

Sealed item rate offline tender on form PWD-6 & 8 are hereby invited on behalf of Governor of Himachal Pradesh by the Executive Engineer, Kalpa Division, HP,PWD; Kalpa for the following works from the approved and eligible contractors enlisted in HP.PWD; so as to reach in the office of the Executive Engineer Kalpa Division HP.PWD. Kalpa on or before **20-02-2026 up to 10.30 A.M.** and shall be opened on the same day at **11:00 AM** in presence of intending contractors or their authorized representatives. The tender form documents can be had from this office (Kalpa Division, HPPWD Kalpa) against cash payment (Non-refundable) on **18-02-2026 upto 4:00 P.M.** No application for issue of tender forms will be received on **18-02-2026 after 4:00 PM.** If the office happens to be closed on the above mentioned dates, the tenders will be sold/opened on the next working day at the same time and venue. The Earnest Money in the shape of National Saving Certificate, F.D.R,s any Post office/Bank in H.P. duly pledged in the name of Executive Engineer, Kalpa Division, HP.PWD. Kalpa must accompany with each tenders. Conditional tenders and application (For purchase of tender forms) received without Earnest Money summarily be rejected. The officer of the tenders shall be kept open for 120 days. The Executive Engineer Reserves (Right to accept or to reject any) or all the tenders without assigning any reasons.

Sr. No	Name of work	Estimated cost	Earnest Money	Time allowed	Cost of form	Eligible class of contractor
1	C/O link road from Khawanta via Pangi Km. 0/00 to 1/500 (SH:- Formation cutting from Km. 0/031 to 0/075 and C/O R/wall in G.I. wire crate at RD. 0/031 to 0/075)	4,47,905/-	9,000/-	One Month	350/-	"C" & "D" Class
2	C/O link road from Khawanta via Pangi Km. 0/00 to 1/500 (SH:- Formation cutting from Km. 0/076.5 to 0/115 and C/O R/wall in G.I. wire crate at RD. 0/076.5 to 0/115)	4,80,957/-	10,000/-	One Month	350/	"C" & "D" Class
3	C/O link road from Khawanta via Pangi Km. 0/00 to 1/500 (SH:- Formation cutting from Km. 0/167 to 0/250 and C/O R/wall in G.I. wire crate at RD. 0/167 to 0/250)	4,77,442/-	10,000/-	One Month	350/	"C" & "D" Class
4	C/O link road from Khawanta via Pangi Km. 0/00 to 1/500 (SH:- Formation cutting from Km. 0/252 to 0/315 and C/O R/wall in G.I. wire crate at RD. 0/252 to 0/315)	4,82,147/-	10,000/-	One Month	350/	"C" & "D" Class
5	C/O link road from Kozang Nallah-II to Meber Khawanta Km. 0/00 to 5/00 (SH:- C/O R/wall in G.I. wire crate at RD. 0/430 to 0/485)	4,88,023/-	10,000/-	One Month	350/	"C" & "D" Class
6	C/O link road from Kozang Nallah-II to Meber Khawanta Km. 0/00 to 5/00 (SH:- C/O R/wall in G.I. wire crate at RD. 0/545 to 0/599)	4,79,150/-	10,000/-	One Month	350/	"C" & "D" Class
7	C/O link road from Kozang Nallah-II to Meber Khawanta Km. 0/00 to 5/00 (SH:- C/O R/wall in G.I. wire crate at RD. 0/715 to 0/771)	4,96,896/-	10,000/-	One Month	350/	"C" & "D" Class


8	C/O link road from Khawanta via Pangi Km. 0/00 to 1/500 (SH:- Formation cutting from Km. 0/00 to 0/030 and C/O R/wall in G.I. wire crate at RD. 0/00 to 0/030 and B/wall in G.I. wire crate at RD. 0/00 to 0/016.8)	4,81,302/-	10,000/-	One Month	350/	“C” & “D” Class
9	C/O link road from Khawanta via Pangi Km. 0/00 to 1/500 (SH:- Formation cutting from Km. 0/120 to 0/165 and C/O R/wall in G.I. wire crate at RD. 0/120 to 0/165 and B/wall in G.I. wire crate at RD. 0/120 to 0/130)	4,97,882/-	10,000/-	One Month	350/	“C” & “D” Class
10	C/O link road from Khawanta via Pangi Km. 0/00 to 1/500 (SH:- C/O B/wall in G.I. wire crate at RD. 0/092 to 0/120.8 and 0/200 to 0/224)	4,61,734/-	10,000/-	One Month	350/	“C” & “D” Class
11	C/O Link road from Chango Nichla to Chango Uperla Km. 0/00 to 3/500 (SH:- C/O R/wall in PCC at RD. 0/090 to 0/110)	4,98,647/-	10,000/-	One Month	350/	“C” & “D” Class
12	C/O Link road from Chango Nichla to Chango Uperla Km. 0/00 to 3/500 (SH:- C/O Cross drainage in RCC and Edge wall from Km. 1/00 to 1/045 and PCC drain at Km. 0/735 to 0/885)	4,99,667/-	10,000/-	One Month	350/	“C” & “D” Class
13	C/O Link road from Chango Nichla to Chango Uperla Km. 0/00 to 3/500 (SH:- C/O Cross drainage in RCC at various RD's)	4,97,666/-	10,000/-	One Month	350/	“C” & “D” Class
14	Restoration of rain damages (PDNA) on link road to Village Pooh Km. 0/00 to 4/270 (SH:- C/O R/wall in G.I. wire crate at RD. 1/845 to 1/857.5 and 2/375 to 2/420)	4,94,626/-	10,000/-	One Month	350/	“C” & “D” Class
15	Restoration of rain damages (PDNA) on link road to Village Pooh Km. 0/00 to 4/270 (SH:- C/O B/wall in G.I. wire crate at RD. 2/025 to 2/075)	4,36,476/-	10,000/-	One Month	350/	“C” & “D” Class
16	Restoration of rain damages (PDNA) on link road to Village Pooh Km. 0/00 to 4/270 (SH:- C/O R/wall in PCC at RD. 2/075 to 2/105)	4,98,330/-	10,000/-	One Month	350/	“C” & “D” Class
17	Restoration of rain damages (PDNA) on link road to Village Pooh Km. 0/00 to 4/270 (SH:- C/O R/wall in G.I. wire Crate at RD. 2/510 to 2/545)	4,49,255/-	10,000/-	One Month	350/	“C” & “D” Class
18	Restoration of rain damages (PDNA) on Peo Kalpa C.P. road Km. 0/00 to 6/765 (SH:- C/O R/wall in PCC at RD. 5/565 to 5/603)	4,98,412/-	10,000/-	One Month	350/	“C” & “D” Class
19	Restoration of rain damages (PDNA) on Peo Kalpa C.P. road Km. 0/00 to 6/765 (SH:- C/O R/wall in PCC at RD. 5/610 to 5/648)	4,97,256/-	10,000/-	One Month	350/	“C” & “D” Class
20	Restoration of rain damages (PDNA) on Peo Kalpa C.P. road Km. 0/00 to 6/765 (SH:- C/O R/wall in PCC at RD. 5/660 to 5/697)	4,93,415/-	10,000/-	One Month	350/	“C” & “D” Class

21	Restoration of rain damages (PDNA) on NH-22 to Taitty valley road Km. 0/00 to 4/545 (SH-C/O R/Wall in G.I. wire crate at RD 1/650 to 1/665)	4,60,346/-	9,500/-	One Month	350/	"C" & "D" Class
22	Restoration of rain damages (PDNA) on NH-22 to Taitty valley road Km. 0/00 to 4/545 (SH-C/O R/Wall in G.I wire crate at RD 1/705 to 1/720)	4,75,293/-	10,000/-	One Month	350/	"C" & "D" Class

**Terms and conditions:-**

**Following documents should accompany the application for tenders:-**

1. Copy of valid enlistment/renewal order.
2. Copy of GST Registration No.
3. Proof of Valid E.P.F accounts Number allotted by the Provident Fund Commissioner Shimla and copy of PAN Number.
4. Ambiguous/Telegraphic/conditional tenders or tenders by fax/E-Mail shall not be entertained/considered in any case.
5. The contractors should quote the rates of each items in words as well as figures in the Schedule of quantity.
6. The earnest money must also accompany with the application for the tender documents.
7. The tender shall be issued to those contractors who have not more than two works in Hand.


  
Executive Engineer,  
Kalpa Division,  
HP. PWD. Kalpa.

Dated:- 14/2/2026

No.:- PW/KNR-E-Tender/NIT/2026- 11371-99

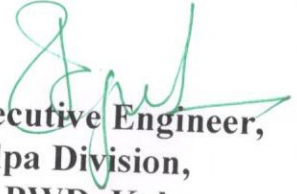

**Copy forwarded for information to:-**

1. The Engineer-in-Chief, HP.PWD. Shimla-2.
2. The Deputy Commissioner, Kinnaur District at Reckong Peo.
3. The Sub Divisional Officer (Civil) Kalpa at Reckong Peo.
4. The Superintending Engineer, 11<sup>th</sup> Circle, HP.PWD. Rampur Bushahr.
5. The Block Development Officer, Kalpa at Reckong Peo.
6. The Chairman, Zila Parishad, Kinnaur District at Reckong Peo.
7. The Chairman, Panchayat Samiti Kalpa at Reckong Peo.
8. Drawing Branch in this office.
9. All the Contractors under this Division.
10. Notice Board.

  
Executive Engineer,  
Kalpa Division,  
HP. PWD. Kalpa.

CERTIFICATE

Certified that the Tender for work called vide this office Letter No. PW/KNR/E-Tender/2026- 11371-99 dated 11-2-2026 and 22 (Twenty Two) number of works are of urgent nature and essential for public safety or restoration of infrastructure.

  
**Executive Engineer,  
Kalpa Division,  
HP.PWD. Kalpa.**  


## DRAFT SCHEDULE OF QUANTITY

**Name of work:-** C/O Link road from Khawanta via Pangi Km. 0/00 to 1/500

**(SH):-** Formation cutting from Km. 0/031 to 0/075 and C/O R/Wall in G.I. wire crate at RD 0/031 to 0/075)

Estimated Cost :- 4,47,905/-

Earnest Money :- 9,000/-

Time :- One Month

Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Cutting in earth work in all heights and depths and in all kinds of soils including saturated soil comprising of Pick, Jumper , blasting work both in soft and hard rock with chiseling, wedging-out of rock where blasting is prohibited, their intermediate classification of soil, setting-out true to the required lines, grades, side slopes, trimming bottoms to levels as shown on the drawing and as directed by the Engineer-in-charge at site according to HP.PWD, specification of 1990 Vol-I and sorting-out useful/ un -useful materials and stacking the same in all leads and lifts in acquired width of the road and transportation of useful/ un-useful materials for filling in road ways camber, embankments for grades, improvement and leveling to required grade and disposing of all surplus excavated earth in acquired width of the road or on approved dumping sites through all modes of transportation including head load or animal transport or mechanically means alongwith its leveling, fine dressing and all labour, machineries, tools, equipments and safety measures and other incidental, necessary to complete the work by mechanised means and labour if required. All useful materials such as stones , shingles, aggregates and slates shall be sorted- out and stacked along road side, the quantity of which shall not be less then 8.83 cum., failing which recovery @ Rupees 300/cum. (Three hundred per cubic metre) shall be effected from the bill of the contractor. Any loss of the public/ private property during the course of execution shall be absolute responsibility of the contractor which shall to be duly compensated by him in all respect, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge.	62.37	₹ 261.66	Rupees Hundred Paise SixtySix Only	Per Cubic meter	₹ 16,320.00
2	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	82.32	₹ 261.05	Rupees Hundred Paise Five Only	Per Cubic meter	₹ 21,490.00

3	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilograme each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	141.12	₹ 2,906.00	Rupees Thousand Hundred Six Only	Two Nine Per Cubic meter	₹ 410,095.00
<b>Total:-</b>						₹ 447,905.00

  
 Executive Engineer,  
 Kalpa Division (B&R),  
 HP.PWD; Kalpa.

2

**DRAFT SCHEDULE OF QUANTITY**

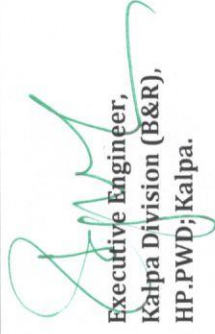
Estimated Cost :- 4,80,957/-  
 Earnest Money :- 10,000/-  
 Time :- One Month

**Name of work:-** C/O Link road from Khawanta via Pangl Km. 0/00 to 1/500

**(SH:-** Formation cutting from Km 0/076.5 to 0/115 and C/O R/Wall in G.I. wire crate at RD 0/076.5 to 0/115

Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Cutting in earth work in all heights and depths and in all kinds of soils including saturated soil comprising of Pick, Jumper, blasting work both in soft and hard rock with chiseling, wedging-out of rock where blasting is prohibited, their intermediate classification of soil, setting-out true to the required lines, grades, side slopes, trimming bottoms to levels as shown on the drawing and as directed by the Engineer-in-charge at site according to HP.PWD, specification of 1990 Vol-I and sorting-out useful/ un-useful materials and stacking the same in all leads and lifts in acquired width of the road and transportation of useful/ un-useful materials for filling in road ways camber, embankments for grades, improvement and leveling to required grade and disposing of all surplus excavated earth in acquired width of the road or on approved dumping sites through all modes of transportation including head load or animal transport or mechanically means alongwith its leveling, fine dressing and all labour, machineries, tools, equipments and safety measures and other incidental, necessary to complete the work by mechanised means and labour if required. All useful materials such as stones, shingles, aggregates and slates shall be sorted-out and stacked along road side, the quantity of which shall not be less than 15.58 cum., failing which recovery @ Rupees 300/cum. (Three hundred per cubic metre) shall be effected from the bill of the contractor. Any loss of the public/ private property during the course of execution shall be absolute responsibility of the contractor which shall be duly compensated by him in all respect, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge.	68.74	₹ 355.92	Rupees Hundred Paise NinetyTwo Only	Per Cubic meter	₹ 24,466.00
2	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	65.52	₹ 261.05	Rupees Hundred Paise Five Only	Per Cubic meter	₹ 17,104.00

3	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram) each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	151.20	₹ 2,906.00	Rupees Thousand Hundred Six Only	Two Nine Hundred Six Only	Per Cubic meter	₹ 439,387.00	
<b>Total:-</b>								₹ 480,957.00

  
**Executive Engineer,  
Kalpa Division (B&R),  
HP.PWD; Kalpa.**

3

### DRAFT SCHEDULE OF QUANTITY

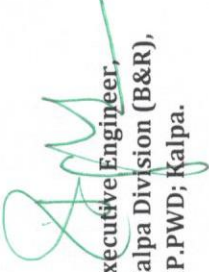
Estimated Cost :- 4,77,442/-  
Earnest Money :- 10,000/-  
Time :- One Month

Name of work:- C/O Link road from Khawanta via Pangi Km. 0/00 to 1/500

(SH:- Formation cutting from Km 0/167 to 0/250 and C/O R/Wall in G.I. wire crate at RD 0/167 to 0/250).

Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Cutting in earth work in all heights and depths and in all kinds of soils including saturated soil comprising of Pick, Jumper, blasting work both in soft and hard rock with chiseling, wedging-out of rock where blasting is prohibited, their intermediate classification of soil, setting-out true to the required lines, grades, side slopes, trimming bottoms to levels as shown on the drawing and as directed by the Engineer-in-charge at site according to HP.PWD, specification of 1990 Vol-I and sorting-out useful/ un-useful materials and stacking the same in all leads and lifts in acquired width of the road and transportation of useful/ un-useful materials for filling in road ways camber, embankments for grades, improvement and leveling to required grade and disposing of all surplus excavated earth in acquired width of the road or on approved dumping sites through all modes of transportation including head load or animal transport or mechanically means alongwith its leveling, fine dressing and all labour, machineries, tools, equipments and safety measures and other incidental, necessary to complete the work by mechanised means and labour if required. All useful materials such as stones, shingles, aggregates and slates shall be sorted-out and stacked along road side, the quantity of which shall not be less than 12.67 cum., failing which recovery @ Rupees 300/cum. (Three hundred per cubic metre) shall be effected from the bill of the contractor. Any loss of the public/ private property during the course of execution shall be absolute responsibility of the contractor which shall to be duly compensated by him in all respect, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge.	89.42	₹ 261.68	Rupees Two Hundred SixtyOne Paise SixtyEight Only	Per Cubic meter	₹ 23,399.00
2	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	88.20	₹ 261.05	Rupees Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 23,025.00

3	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty filve kilogramme each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	148.32	₹ 2,906.00	Rupees Thousand Hundred Six Only	Two Nine Per Cubic meter	₹ 431,018.00
<b>Total:-</b>						<b>₹ 477,442.00</b>

  
 Executive Engineer,  
 Kalpa Division (B&R),  
 HP.PWD; Kalpa.

**DRAFT SCHEDULE OF QUANTITY**

**Name of work:-** C/O Link road from Khawanta via Pangi Km. 0/00 to 1/500

**(SH:-** Formation cutting from Km 0/252 to 0/315 and C/O R/Wall in G.I. wire crate at RD 0/252 to 0/315).


Estimated Cost :- 4,82,147/-

Earnest Money :- 10,000/-

Time :- One Month

Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Cutting in earth work in all heights and depths and in all kinds of soils including saturated soil comprising of Pick, Jumper, blasting work both in soft and hard rock with chiseling, wedging-out of rock where blasting is prohibited, their intermediate classification of soil, setting-out true to the required lines, grades, side slopes, trimming bottoms to levels as shown on the drawing and as directed by the Engineer-in-charge at site according to HP.PWD, specification of 1990 Vol-I and sorting-out useful/ un-useful materials and stacking the same in all leads and lifts in acquired width of the road and transportation of useful/ un-useful materials for filling in road ways camber, embankments for grades, improvement and leveling to required grade and disposing of all surplus excavated earth in acquired width of the road or on approved dumping sites through all modes of transportation including head load or animal transport or mechanically means alongwith its leveling, fine dressing and all labour, machineries, tools, equipments and safety measures and other incidental, necessary to complete the work by mechanised means and labour if required. All useful materials such as stones, shingles, aggregates and slates shall be sorted-out and stacked along road side, the quantity of which shall not be less than 10.68 cum., failing which recovery @ Rupees 300/cum. (Three hundred per cubic metre) shall be effected from the bill of the contractor. Any loss of the public/ private property during the course of execution shall be absolute responsibility of the contractor which shall to be duly compensated by him in all respect, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge.	75.42	₹ 261.67	Rupees Hundred Paise Only	Per Cubic meter	₹ 19,735.00
2	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in, all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	88.20	₹ 261.05	Rupees Hundred Paise Five Only	Per Cubic meter	₹ 23,025.00

3	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram) each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	151.20	₹ 2,906.00	Rupees Thousand Hundred Six Only	Two Nine Per Cubic meter	₹ 439,387.00
<b>Total:-</b>						₹ 482,147.00

  
**Executive Engineer,**  
**Kalpa Division (B&R),**  
**HP.PWD; Kalpa.**


**DRAFT SCHEDULE OF QUANTITY**

**Name of work:-** C/O link road from Kozang Nallah-II to Meber Khawanta Km. 0/00 to 5/00  
(SH:- C/O R/Wall in G.I. wire crate at RD 0/430 to 0/485).

Estimated Cost :- 4,88,023/-  
Earnest Money :- 10,000/-  
Time :- One Month

(5)

Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	106.15	₹ 261.07	Rupees Hundred SixtyOne Paise Seven Only	Per Cubic meter	₹ 27,713.00
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	158.40	₹ 2,906.00	Rupees Thousand Hundred Six Only	Per Cubic meter	₹ 460,310.00
	<b>Total:-</b>					<b>₹ 488,023.00</b>


  
**Executive Engineer,**  
**Kalpa Division (B&R),**  
**HP.PWD, Kalpa.**

**DRAFT SCHEDULE OF QUANTITY**

**Name of work:-** C/O link road from Kozang Nallah-II to Meber Khawanta Km 0/00 to 5/00  
(SH:- C/O R/Wall in G.I. wire crate at RD 0/545 to 0/599).

Estimated Cost :- 4,79,150/-  
Earnest Money :- 10,000/-  
Time :- One Month

Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	104.22	₹ 261.07	Rupees Hundred Paise Seven Only	Per Cubic meter	₹ 27,209.00
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	155.52	₹ 2,906.00	Rupees Thousand Hundred Six Only	Per Cubic meter	₹ 451,941.00
<b>Total:-</b>						<b>₹ 479,150.00</b>

  
 Executive Engineer  
 Kalpa Division (B&R),  
 HP.PWD; Kalpa.

7

**DRAFT SCHEDULE OF QUANTITY**

Estimated Cost :: 4,96,896/-  
Earnest Money :: 10,000/-  
Time :: One Month

**Name of work:-** C/O link road from Kozang Nallah-II to Meber Khawanta Km. 0/00 to 5/00  
(SH:- C/O R/Wall in G.I. wire crate at RD 0/715 to 0/771).

Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	108.08	₹ 261.07	Rupees Hundred SixtyOne Paise Seven Only	Per Cubic meter	₹ 28,216.00
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram) each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	161.28	₹ 2,906.00	Rupees Thousand Hundred Six Only	Per Cubic meter	₹ 468,680.00
<b>Total:-</b>						<b>₹ 496,896.00</b>

  
Executive Engineer,  
Kalpa Division (B&R),  
HP.PWD, Kalpa.

8

**SCHEDULE OF QUANTITY**

Name of work:- C/O Link road from Khawanta via Pangi Km. 0/00 to 1/500 (SH- Formation cutting from Km. 0/00 to 0/030, C/O R/Wall in G.I. wire crate at RD 0/00 to 0/030 and B/Wall in G.I. wire crate at RD 0/00 to 0/016.8)		Estimated Cost :- 4,81,302/-				
		Earnest Money :- 10,000/-				
		Time :- One Month				
Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Cutting in earth work in all heights and depths and in all kinds of soils including saturated soil comprising of Pick, Jumper , blasting work both in soft and hard rock with chiseling, wedging-out of rock where blasting is prohibited, their intermediate classification of soil, setting-out true to the required lines, grades, side slopes, trimming bottoms to levels as shown on the drawing and as directed by the Engineer-in-charge at site according to HP.PWD, specification of 1990 Vol-I and sorting-out useful/ un -useful materials and stacking the same in all leads and lifts in acquired width of the road and transportation of useful/ un-useful materials for filling in road ways camber, embankments for grades, improvement and leveling to required grade and disposing of all surplus excavated earth in acquired width of the road or on approved dumping sites through all modes of transportation including head load or animal transport or mechanically means alongwith its leveling, fine dressing and all labour, machineries, tools, equipments and safety measures and other incidental, necessary to complete the work by mechanised means and labour if required. All useful materials such as stones , shingles, aggregates and slates shall be sorted- out and stacked along road side, the quantity of which shall not be less then 3.86 cum., failing which recovery @ Rupees 300/cum. (Three hundred per cubic metre) shall be effected from the bill of the contractor. Any loss of the public/ private property during the course of execution shall be absolute responsibility of the contractor which shall to be duly compensated by him in all respect, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge.	27.23	₹ 261.73	Rupees Two Hundred SixtyOne SeventyThree Only	Per Cubic meter	₹ 7,127.00
2	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	75.60	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 19,735.00

3	<p>Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilograme each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.</p>	156.38	₹ 2,906.00	Rupees Two Thousand Nine Hundred Six Only	Per Cubic meter	₹ 454,440.00
<b>Total in figures:-</b>						₹ 481,302.00
<b>Total in Words:-</b>				Rupees Four Lakh EightyOne Thousand Three Hundred Two Only		
<b>Quoted Percentage rate upto three Digits :-</b>						
		(+)/(-)				

  
 Executive Engineer,  
 Kalpa Division (B&R),  
 HP.PWD, Kalpa.

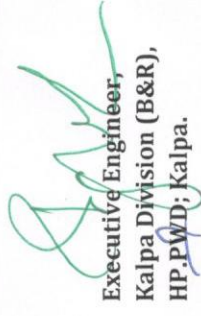
9

**SCHEDULE OF QUANTITY**

Name of work:-		C/O Link road from Khawanta via Pangl Km. 0/00 to 1/500 (SH:- Formation cutting from Km 0/120 to 0/165 and and C/O R/Wall in G.I. wire crate at RD 0/120 to 0/165 and B/Wall in G.I. wire crate at RD 0/120 to 0/130).		Estimated Cost	4,97,882/-
				Earnest Money	10,000/-
				Time	One Month
Sr. No.	Description of items	Qty.	In Fig.	Rate	
				In Words	Unit
1	Cutting in earth work in all heights and depths and in all kinds of soils including saturated soil comprising of Pick, Jumper, blasting work both in soft and hard rock with chiseling, wedging-out of rock where blasting is prohibited, their intermediate classification of soil, setting-out true to the required lines, grades, side slopes, trimming bottoms to levels as shown on the drawing and as directed by the Engineer-in-charge at site according to HP.PWD, specification of 1990 Vol-I and sorting-out useful/ un-useful materials and stacking the same in all leads and lifts in acquired width of the road and transportation of useful/ un-useful materials for filling in road ways camber, embankments for grades, improvement and leveling to required grade and disposing of all surplus excavated earth in acquired width of the road or on approved dumping sites through all modes of transportation including head load or animal transport or mechanically means alongwith its leveling, fine dressing and all labour, machineries, tools, equipments and safety measures and other incidental, necessary to complete the work by mechanised means and labour if required. All useful materials such as stones, shingles, aggregates and slates shall be sorted-out and stacked along road side, the quantity of which shall not be less than 8.60 cum., failing which recovery @ Rupees 300/cum. (Three hundred per cubic metre) shall be effected from the bill of the contractor. Any loss of the public/ private property during the course of execution shall be absolute responsibility of the contractor which shall to be duly compensated by him in all respect, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge.	60.68	₹ 261.68	Rupees Two Hundred SixtyOne SixtyEight Only	Per Cubic meter
2	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	83.10	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only	Per Cubic meter

₹ 21,693.00

3	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram) each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	158.40	₹ 2,906.00	Rupees Two Thousand Nine Hundred Six Only	Per Cubic meter	₹ 460,310.00
<b>Total in figures:-</b>						₹ 497,882.00
<b>Total in Words:-</b>						Rupees Four Lakh NinetySeven Thousand Eight Hundred EightyTwo Only
<b>Quoted Percentage rate upto three Digits :-</b>						(+)/(-)

  
 Executive Engineer,  
 Kalpa Division (B&R),  
 HP.PWD; Kalpa.



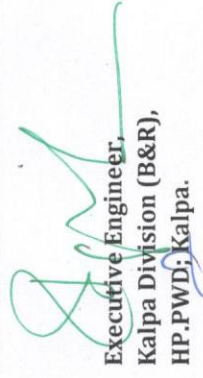


12

**SCHEDULE OF QUANTITY**

Name of work:- C/O Link road from Chango Nichla to Chango Uperla Km. 0/00 to 3/500 (SH:- C/O Cross drainage in RCC and Edge wall from Km 1/00 to 1/045 and PCC Drain at Km. 0/735 to 0/885).		Estimated Cost :-	4,99,667/-			
		Earnest Money :-	10,000/-			
		Time	One Month			
Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	94.51	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 24,672.00
2	Providing concrete for plain / reinforced concrete in open foundations complete as per drawing and technical specification Clause 802,803,1202 & 1203. P.C.C grade M10 Nominal mix 1:3:6 (one Cement : three coarse sand) : six graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	62.84	₹ 6,057.00	Rupees Six Thousand FiftySeven Only	Per Cubic meter	₹ 380,622.00
3	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204.R.C.C grade M-30(1:1.5:3) (one Cement : one point five coarse sand) : three graded stone aggregate) nominal mix, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	5.20	₹ 9,525.30	Rupees Nine Thousand Five Hundred TwentyFive Paise Thirty Only	Per Cubic meter	₹ 49,532.00
4	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete above plinth level Thermo-Mechanically Treated bars of grade Fe-500D or more, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	242.06	₹ 102.25	Rupees One Hundred Two Paise TwentyFive Only	Per Kilogram	₹ 24,751.00

5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia (One hundred millimeter diameter) PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 , including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	73.00	₹ 275.20	Rupees Two Hundred SeventyFive Twenty Only	Each	₹ 20,090.00
<b>Total in figures:-</b>						₹ 499,667.00
<b>Total in Words:-</b>		<b>Rupees Four Lakh NinetyNine Thousand Six Hundred SixtySeven Only</b>				
<b>Quoted Percentage rate upto three Digits :-</b>		<b>(+)/(-)</b>				

  
 Executive Engineer,  
 Kalpa Division (B&R),  
 HP.PWD; Kalpa.



14

### SCHEDULE OF QUANTITY

Name of work:-		Restoration of rain damages (PDNA) on link road to village Pooch Km. 0/00 to 4/270 (SH:- C/O R/Wall in G.I. wire crate at RD 1/845 to 1/357.5 and 2/375 to 2/420).		Estimated Cost :-	4,94,626/-	
				Earnest Money :-	10,000/-	
				Time	One Month	
Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	51.30	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 13,392.00
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogramme each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	165.60	₹ 2,906.00	Rupees Two Thousand Nine Hundred Six Only	Per Cubic meter	₹ 481,234.00
<b>Total in figures:-</b>						₹ 494,626.00
<b>Total in Words:-</b>		<b>Rupees Four Lakh NinetyFour Thousand Six Hundred TwentySix Only</b>				
<b>Quoted Percentage rate upto three Digits :-</b>		<b>(+)/( -)</b>				


  
 Executive Engineer,  
 Kalpa Division (B&R),  
 HP.PWD; Kalpa.

15

**SCHEDULE OF QUANTITY**

**Name of work:-** Restoration of rain damages (PDNA) on link road to village Pooch Km. 0/00 to 4/270  
**(SH:- C/O B/Wall in G.I. wire crate at RD 2/025 to 2/075).**

Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	69.00	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 18,012.00
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram) each as per drawing and technical specification Clause 1301, and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	144.00	₹ 2,906.00	Rupees Two Thousand Nine Hundred Six Only	Per Cubic meter	₹ 418,464.00
<b>Total in figures:-</b> <b>Total in Words:-</b> Rupees Four Lakh ThirtySix Thousand Four Hundred SeventySix Only						₹ 436,476.00
<b>Quoted Percentage rate upto three Digits :-</b> (+)/(-)						

  
 Executive Engineer,  
 Kalpa Division (B&R),  
 HP.PWD, Kalpa.

**DRAFT SCHEDULE OF QUANTITY**

**Name of work:-** Restoration of rain damages (PDNA) on link road to village Pooh Km. 0/00 to 4/270  
(SH:- C/O R/Wall in PCC at RD 2/075 to 2/105).

Estimated Cost :: 4,98,330/-  
Earnest Money :: 10,000/-  
Time :: One Month


Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	44.42	₹ 261.05	Rupees Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 11,596.00
2	Providing concrete for plain / reinforced concrete in open foundations complete as per drawing and technical specification Clause 802,803,1202 & 1203. P.C.C grade M10 Nominal mix 1:3:6 (one Cement : three coarse sand) : six graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	77.86	₹ 6,057.00	Rupees Six Thousand FiftySeven Only	Per Cubic meter	₹ 471,598.00
3	Providing weapholes in brick masonry / stone masonry / plain reinforced concrete abutment, wing wall, return wall with 100 mm dia (One hundred millimeter diameter) PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 , including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	55.00	₹ 275.20	Rupees Hundred SeventyFive Paise Twenty Only	Each	₹ 15,136.00
<b>Total:-</b>						<b>₹ 498,330.00</b>

  
Executive Engineer,  
Kalpa Division (B&R),  
HP.PWD, Kalpa.

**SCHEDULE OF QUANTITY**

**Name of work:-** Restoration of rain damages (PDNA) on link road to village PooH Km. 0/00 to 4/270  
**(SH:- C/O R/Wall in G.I. wire crate at RD 2/510 to 2/545).**

Sr. No.	Description of items	Qty.	Rate		Unit	Estimated Cost
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	37.80	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 9,868.00
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	151.20	₹ 2,906.00	Rupees Two Thousand Nine Hundred Six Only	Per Cubic meter	₹ 439,387.00
<b>Total in figures:-</b> <b>Total in Words:-</b> Rupees Four Lakh FourtyNine Thousand Two Hundred FiftyFive Only						₹ 449,255.00
<b>Quoted Percentage rate upto three Digits :-</b>						(+)/(-)

  
 Executive Engineer,  
 Kalpa Division (B&R),  
 HP.PWD; Kalpa.

18

**SCHEDULE OF QUANTITY**

Name of work:-		Restoration of rain damages (PDNA) on Peo Kalpa C.P. road Km. 0/00 to 6/765 (SH:- C/O R/Wall in PCC at RD 5/565 to 5/603).		Estimated Cost	4,98,412/-	
				Earnest Money	10,000/-	
				Time	One Month	
Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	71.44	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 18,649.00
2	Providing and Laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802, 803, 1202 and 1203. PCC 1:6:12(one Cement : six coarse sand) : twelve graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	8.74	₹ 4,041.70	Rupees Four Thousand FourtyOne Seventy Only	Per Cubic meter	₹ 35,324.00
3	Providing concrete for plain / reinforced concrete in open foundations complete as per drawing and technical specification Clause 802,803,1202 & 1203. P.C.C grade M10 Nominal mix 1:3:6 (one Cement : three coarse sand) : six graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	70.65	₹ 6,057.00	Rupees Six Thousand FiftySeven Only	Per Cubic meter	₹ 427,927.00



19

**SCHEDULE OF QUANTITY**

<b>Name of work:-</b> Restoration of rain damages (PDNA) on Peo Kalpa C.P. road Km. 0/00 to 6/765 (SH:- C/O R/Wall in PCC at RD 5/610 to 5/648).		Estimated Cost :-	4,97,256/-			
		Earnest Money :-	10,000/-			
		Time :-	One Month			
<b>Sr. No.</b>	<b>Description of items</b>	<b>Qty.</b>	<b>Rate</b>		<b>Unit</b>	<b>Amount</b>
			<b>In Fig.</b>	<b>In Words</b>		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	71.44	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 18,649.00
2	Providing and Laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802, 803, 1202 and 1203. PCC 1:6:12(one Cement : six coarse sand) : twelve graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	8.74	₹ 4,041.70	Rupees Four Thousand FourtyOne Seventy Only	Per Cubic meter	₹ 35,324.00
3	Providing concrete for plain / reinforced concrete in open foundations complete as per drawing and technical specification Clause 802,803,1202 & 1203. P.C.C grade M10 Nominal mix 1:3:6 (one Cement : three coarse sand) : six graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	70.55	₹ 6,057.00	Rupees Six Thousand FiftySeven Only	Per Cubic meter	₹ 427,321.00



20

**SCHEDULE OF QUANTITY**

Name of work:-		Restoration of rain damages (PDNA) on Peo Kalpa C.P. road Km. 0/00 to 6/765		Estimated Cost :-	4,93,415/-	
		(SH- C/O R/Wall in PCC at RD 5/660 to 5/697).		Earnest Money :-	10,000/-	
				Time :-	One Month	
Sr. No.	Description of items	Qty.	Rate		Unit	Amount
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	69.56	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only	Per Cubic meter	₹ 18,159.00
2	Providing and Laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802, 803, 1202 and 1203. PCC 1:6:12(one Cement : six coarse sand) : twelve graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	8.51	₹ 4,041.70	Rupees Four Thousand FourtyOne Seventy Only	Per Cubic meter	₹ 34,395.00
3	Providing concrete for plain / reinforced concrete in open foundations complete as per drawing and technical specification Clause 802,803,1202 & 1203. P.C.C grade M10 Nominal mix 1:3:6 (one Cement : three coarse sand) : six graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	70.15	₹ 6,057.00	Rupees Six Thousand FiftySeven Only	Per Cubic meter	₹ 424,899.00



## SCHEDULE OF QUANTITY

**Name of work:-** Restoration of rain damages (PDNA) on NH-22 to Taity valley road Km. 0/00 to 4/545  
**(SH:- C/O R/Wall in G.I. wire crate at RD 1/650 to 1/665).**

Sr. No.	Description of items	Qty.	In Fig.	Rate		Unit	Estimated Cost	
				In Words	Amount			
							Estimated Cost :- 4,60,346/- Earnest Money :- 9,500/- Time :- One Month	
1	Earthwork in excavation for structures as per drawing and technical specifications clause 305.1 including setting out , construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all lead dressing of sides and bottom and backfilling in trenches with excavated suitable material upto all depth,including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	28.69	₹ 261.05	Rupees Two Hundred SixtyOne Paise Five Only		Per Cubic meter	₹ 7,490.00	
2	Providing concrete for plain / reinforced concrete in open foundations complete as per drawing and technical specification Clause 802,803,1202 & 1203. P.C.C grade M10 Nominal mix 1:3:6 (one Cement : three coarse sand) : six graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	22.95	₹ 6,057.00	Rupees Six Thousand FiftySeven Only		Per Cubic meter	₹ 139,008.00	
3	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram) each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, GST or other taxes imposed by the Government.	108.00	₹ 2,906.00	Rupees Two Thousand Nine Hundred Six Only		Per Cubic meter	₹ 313,848.00	
<b>Total in figures:-</b>								₹ 460,346.00
<b>Total in Words:-</b>								
<b>Quoted Percentage rate upto three Digits :-</b>								
Rupees Four Lakh Sixty Thousand Three Hundred FourtySix Only								
(+)/(-)								

  
 Executive Engineer,  
 Kalpa Division (B&R),  
 HP.PWD, Kalpa.

