

REGISTERED

Office of the Executive Engineer, B&R Division, HP PWD Kalpa District Kinnaur (HP)

Web:- www.hppwd.gov.in E mail:- hp-kin@nic.in

Phone No:- 01786-226027 Fax:- 01786-226027.

No:- PW/KNR-E-Tender/2026- 13201-03

Dated:- 11/7/2026


To

The Executive Engineer (IT Cell),
HP.PWD. Shimla-2.

Subject:- Publication of Tender Notice (OFFLINE)


Enclosed please find herewith the Tender of works costing above 1 upto 5.00 Lakh as given in the Notice Inviting Tender for uploading on the departmental website as per notification vide Pr. Secy. (PW) to the Govt. of Himachal Pradesh letter No. PBW(B) 1/2020 dated 16-07-2021 and even file No. 1/2024 dated 03-01-2024, 03-01-2025 and 1/2024-241828 dated 17-07-2025 and PWD-B-A 0(3)/8/2025-300858 dated 09-10-2025, even file No. 300858 dated 13-11-2025, 08-12-2025 and even file No. 241828 dated 02-02-2026. The works mentioned in the tender notice are urgent in nature and public interest.

Encl:- NIT, Schedule of Quantity
& Certificate.


Executive Engineer,
Kalpa Division,
HP.PWD. Kalpa.

Copy forwarded for information to:-

1. The Superintending Engineer, 11th Circle, HP.PWD. Rampur Bushahr.
2. Copy to Drawing Branch in this office.


Executive Engineer,
Kalpa Division,
HP. PWD, Kalpa

HP.P.W.D. TENDER NOTICE (offline)

Sealed item rate offline tender on form PWD-6 & 8 are hereby invited on behalf of Governor of Himachal Pradesh by the **Executive Engineer, Kalpa Division, HP,PWD; Kalpa** for the following works from the approved and eligible contractors enlisted in HP.PWD; so as to reach in the office of the Executive Engineer Kalpa Division HP.PWD. Kalpa on or before **17-03-2026 up to 10.30 A.M.** and shall be opened on the same day at **11:00 AM** in presence of intending contractors or their authorized representatives. The tender form documents can be had from this office (Kalpa Division, HPPWD Kalpa) against cash payment (Non-refundable) on **16-03-2026 upto 4:00 P.M.** No application for issue of tender forms will be received on **16-03-2026 after 4:00 PM.** If the office happens to be closed on the above mentioned dates, the tenders will be sold/opened on the next working day at the same time and venue. The Earnest Money in the shape of National Saving Certificate, F.D.R,s any Post office/Bank in H.P. duly pledged in the name of Executive Engineer, Kalpa Division, HP.PWD. Kalpa must accompany with each tenders. Conditional tenders and application (For purchase of tender forms) received without Earnest Money summarily be rejected. The officer of the tenders shall be kept open for 120 days. The Executive Engineer Reserves (Right to accept or to reject any) or all the tenders without assigning any reasons.

Sr. No	Name of work	Estimated cost	Earnest Money	Time allowed	Cost of form	Eligible class of contractor
1	Balance work for the Construction of Residential accommodation for Teachers at PooH (Gurukul awas Yojna) in District Kinnaur (HP) (SH:- Providing Cup boards in rooms, interlocking paver block etc.)	3,46,060/-	7,000/-	One Month	350/-	"C" & "D" Class
2	Restoration of rain damages on Peo Karchham Shilti road Km. 0/00 to 11/635 (SH:- Removal of slips/landslides from Km. 0/00 to 4/00)	4,94,881/-	10,000/-	One Month	350/	"C" & "D" Class
3	Restoration of rain damages (PDNA) on NH-22 to Taitty Valley road Km. 0/00 to 4/545 (SH:- C/O R/wall in PCC at RD. 0/945 to 0/970)	4,89,929/-	10,000/-	One Month	350/	"C" & "D" Class
4	Restoration of rain damages (PDNA) on NH-22 to Taitty Valley road Km. 0/00 to 4/545 (SH:- C/O R/wall in PCC at RD. 0/975 to 1/00)	4,88,221/-	10,000/-	One Month	350/	"C" & "D" Class
5	Restoration of rain damages (PDNA) on Thangi Kunnu Charang road Km. 0/00 to 20/00 (SH:- C/O R/wall in G.I. wire crate at RD. 8/860 to 8/897.5)	4,98,419/-	10,000/-	One Month	350/	"C" & "D" Class

Terms and conditions:-

Following documents should accompany the application for tenders:-

1. Copy of valid enlistment/renewal order.
2. Copy of GST Registration No.
3. Proof of Valid E.P.F accounts Number allotted by the Provident Fund Commissioner Shimla and copy of PAN Number.
4. Ambiguous/Telegraphic/conditional tenders or tenders by fax/E-Mail shall not be entertained/considered in any case.
5. The contractors should quote the rates of each items in words as well as figures in the Schedule of quantity.

6. The earnest money must also accompany with the application for the tender documents.
7. The tender shall be issued to those contractors who have not more than two works in Hand.

Executive Engineer,
Kalpa Division,
HP. PWD. Kalpa.

Dated:- 11/3/26

No.:- PW/KNR-E-Tender/NIT/2026- 13177-99

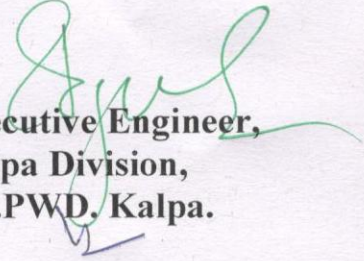
Copy forwarded for information to:-

1. The Engineer-in-Chief, HP.PWD. Shimla-2.
2. The Deputy Commissioner, Kinnaur District at Reckong Peo.
3. The Sub Divisional Officer (Civil) Kalpa at Reckong Peo.
4. The Superintending Engineer, 11th Circle, HP.PWD. Rampur Bushahr.
5. The Block Development Officer, Kalpa at Reckong Peo.
6. The Chairman, Zila Parishad, Kinnaur District at Reckong Peo.
7. The Chairman, Panchayat Samiti Kalpa at Reckong Peo.
8. Drawing Branch in this office.
9. All the Contractors under this Division.
10. Notice Board.

Executive Engineer,
Kalpa Division,
HP. PWD. Kalpa.

CERTIFICATE

Certified that the Tender for work called vide this office Letter No. PW/KNR/E-Tender/2026- 13177-99 dated 11-3-2026 and 5 (Five) numbers of works are of urgent nature and essential for public safety or restoration of infrastructure and public interest.


**Executive Engineer,
Kalpa Division,
HP.PWD, Kalpa.**

SCHEDULE OF QUANTITY

Name of work:- Balance work for the C/O Residential accommodation for Teachers at Pooh (Gurukul awas yojna) in Distt. Kinnaur (H.P.) (SH:- Providing cup boards in rooms, interlocking paver block etc).		Estimated Cost Earnest Money	3,46,060/-			
				Time	7,000/-	
Sr. No.	Description of items	Qty.	Rate			Unit
			In Fig.	In Words		
1	Providing and fixing 19mm thick water proof commercial board in shelves/box for cup board with butt joints & fixing with nails & screws etc complete) including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge. including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	109.44	₹ 1,725.65	Rupees One Thousand Seven Hundred SixtyFive Only	Per Square Meter	₹ 188,855.00
2	Providing and fixing 19mm (Nineteen millimeter) thick Commercial Board water proof shutters for cup boards i/c fixing with nickel plated piano hinges with screws etc, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	22.86	₹ 1,750.75	Rupees One Thousand Seven Hundred Fifty Paise SeventyFive Only	Per Square meter	₹ 40,022.00
3	Providing and fixing 1.00mm (One point zero zero millimeter) thick coloured or plain lamination sheet (sunmica) on boards/ply wood sheets with approved adhesive and nails etc complete, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	22.86	₹ 620.85	Rupees Six Hundred Twenty EightyFive Only	Per Square meter	₹ 14,193.00
4	Providing and fixing square edges cover fillets (beading) 19mm x 6mm (Nineteen millimeter into six millimeter) section i/c mitring at junctions with wood screws and nails complete, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	75.90	₹ 158.20	Rupees One Hundred FiftyEight Twenty Only	Per Running meter	₹ 12,007.00
5	Painting Wood work with Deluxe Multi Surface Paint to give an even shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @ 0.75ltr/10 sqm of approved brand and manufacture, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	109.44	₹ 95.20	Rupees NinetyFive Paise Twenty Only	Per Square meter	₹ 10,419.00

6	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete : including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge. including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	18.00	₹ 180.10	Rupees One Hundred Eighty Paise Ten Only	Each	₹ 3,242.00
6.01	125 mm (One hundred twenty five millimeter)	24.00	₹ 152.15	Rupees One Hundred FiftyTwo Paise Fifteen Only	Each	₹ 3,652.00
6.02	100mm (Hundred millimeter)	24.00	₹ 35.00	Rupees ThirtyFive Only	Per Square meter	₹ 840.00
7	Providing and fixing magnetic catcher of approved quality in cupboard / ward robe shutters, including fixing with necessary screws etc. complete, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge. including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	6.48	₹ 5,254.10	Rupees Five Thousand Two Hundred FiftyFour Paise Ten Only	Per Square meter	₹ 34,047.00
8	Providing and fixing in position collapsible steel shutters with vertical channels 20x10x2 mm (Twenty into ten into two millimeter) and braced with flat iron diagonals 20x5 mm (Twenty into five millimeter) size, with top and bottom rail of T-iron 40x40x6(Forty into forty into six millimeter) mm, with 40 mm dia (forty millimeter diameter) steel pulleys, complete with bolts, nuts, locking arrangement, stoppers, handles, including applying a priming coat of approved steel primer, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge. including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	1.80	₹ 270.25	Rupees Two Hundred Seventy Paise TwentyFive Only	Per Cubic meter	₹ 486.00
9	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.					

10	Providing and laying stone soling properly hand-packed filling interstices with Kharanja stone and consolidating with power road roller to the required gradient and combor including spreading watering and rolling of binding materials moorum or earth etc., 100mm (One hundred millimeter) spread thickness, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	1.20	₹ 950.35	Rupees Nine Hundred Fifty Paise ThirtyFive Only	Per Cubic meter	₹ 1,140.00	
11	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level 1:3:6 (One cement : Three coarse sand) : Six graded stone aggregate 20 mm (Twenty millimeter) nominal size), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	1.20	₹ 6,150.45	Rupees Six Thousand One Hundred Fifty Paise FourtyFive Only	Per Cubic meter	₹ 7,381.00	
12	Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level :1:1.5:3 (One cement : One point five coarse sand): Three graded stone aggregate 20mm (Twenty millimeter) nominal size), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	0.30	₹ 10,852.65	Rupees Ten Thousand Eight Hundred FiftyTwo Paise SixtyFive Only	Per Cubic meter	₹ 3,256.00	
13	Providing and laying 60mm (Sixty millimeter) thick factory made cement concrete interlocking paver block of NTC M -30 grade made by block making machine with strong vibratory compaction, of approved size, design & shape, laid in required colour and pattern over and including 50mm thick compacted bed of coarse sand, filling the joints with lime sand etc. all complete, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	12.00	₹ 2,210.00	Rupees Two Thousand Two Hundred Ten Only	Per Square meter	₹ 26,520.00	
Total in figures:-							₹ 346,060.00
Total in Words:-							
Quoted Percentage rate upto three Digits :-							
(+)/(-)							
Rupees Three Lakh FourtySix Thousand Sixty Only							



 Executive Engineer,
 Kalpa Division (B&R),
 HP.PWD; Kalpa.

2

SCHEDULE OF QUANTITY

Name of work:- Restoration of rain damages on Peo Karcham Shilti road Km. 0/00 to 11/635
(SH:- Removal of slips/landslides from Km. 0/00 to 4/00).

Sr. No.	Description of items	Qty.	Rate		Unit	Estimated Cost
			In Fig.	In Words		
1	Removal of land slide in hilly area in all kinds of soil, ordinary rock / big boulders requiring breaking by mechanical means , i.e. breaker etc. including cutting and trimming of slops and disposal of cut material with in all leads and lifts of material as per technical specification 302.3.5 and 1611, including carriage of materials through all modes of transportation with in all leads and lifts, as per direction of the Engineer-in-charge.	2995.65	₹ 165.20	Rupees One Hundred SixtyFive Paise Twenty Only	Per Cubic meter	₹ 494,881.00
Total in figures:-		Rupees Four Lakh NinetyFour Thousand Eight Hundred EightyOne Only				
Total in Words:-		(+)/(-)				
Quoted Percentage rate upto three Digits :-						



Executive Engineer,
Kalpa Division (B&R),
HP.PWD; Kalpa.

4

SCHEDULE OF QUANTITY

Name of work:- Restoration of rain damages (PDNA) on NH-22 to Taity valley road Km. 0/00 to 4/545
(SH:- C/O R/Wall in PCC at RD 0/975 to 1/00).


Sr. No.	Description of items	Qty.	Rate		Unit	Estimated Cost :-
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	3.38	₹ 275.25	Rupees Two Hundred SeventyFive TwentyFive Only	Per Cubic meter	₹ 930.00
2	Providing and Laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802, 803, 1202 and 1203. PCC 1:6:12(one Cement : six coarse sand) : twelve graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	3.88	₹ 4,263.50	Rupees Four Thousand Two Hundred SixtyThree Paise Fifty Only	Per Cubic meter	₹ 16,542.00
3	Providing concrete for plain / reinforced concrete in open foundations complete as per drawing and technical specification Clause 802,803,1202 & 1203. P.C.C grade M10 Nominal mix 1:3:6 (one Cement : three coarse sand) : six graded stone aggregate), including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	73.13	₹ 6,250.65	Rupees Six Thousand Two Hundred Fifty Paise SixtyFive Only	Per Cubic meter	₹ 457,110.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm dia (One hundred millimeter diameter) PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	47.00	₹ 290.20	Rupees Two Hundred Ninety Paise Twenty Only	Each	₹ 13,639.00
Total in figures:-						₹ 488,221.00
Total in Words:-						Rupees Four Lakh EightyEight Thousand Two Hundred TwentyOne Only
Quoted Percentage rate upto three Digits :-						(+)/(-)


Executive Engineer
Kalpa Division
HP. PWD, Kalpa

SCHEDULE OF QUANTITY

Name of work:- Restoration of rain damages (PDNA) on Thangi Kunnu Charang road Km. 0/00 to 20/00
(SH:- R/Wall in G.I. wire crate at RD 8/860 to 8/897.5).

Sr. No.	Description of items	Qty.	Rate		Unit	Estimated Cost
			In Fig.	In Words		
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains, including dressing of sides and ramming of bottoms, with in all lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, within all leads in all kind of soil, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	42.75	₹ 270.60	Rupees Two Hundred Seventy Paise Sixty Only	Per Cubic meter	₹ 11,568.00
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter) diameter GI wire conforming to IS: 280 and IS: 4826 in 100mm x 100mm (Hundred millimeter into hundred millimeter) mesh (woven diagonally) including 10 percent extra for laps and joints laid with stone boulders weighting not less than 25kg (twenty five kilogram each as per drawing and technical specification Clause 1301, including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, GST or other taxes imposed by the Government.	162.00	₹ 3,005.25	Rupees Thousand Five Paise TwentyFive Only	Per Cubic meter	₹ 486,851.00
Total in figures:-						₹ 498,419.00
Total in Words:-						
Quoted Percentage rate upto three Digits :-						
Rupees Four Lakh NinetyEight Thousand Four Hundred Nineteen Only						
(+)/(-)						


 Executive Engineer,
 Kalpa Division (B&R),
 HP.PWD, Kalpa.