

HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT.
NOTICE INVITING TENDER.

Sealed percentage rate tenders are hereby invited on Form No.7 & 8 by the undersigned on behalf of the Governor of Himachal Pradesh for the following works 28 -04-2026 upto 03.00 P.M and shall be opened on the same day on 04.30 P.M. in the presence of the intending contractors or their authorized representative who may like to be present. The tender form can be had from this office against cash payment (Non- refundable) during the working hours.

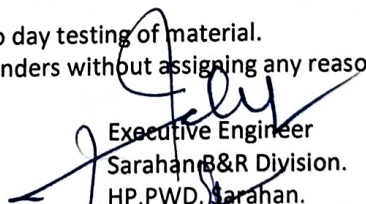
The earnest money in the shape of National Saving Certificate, FDRs/TDRs/ Account/Saving account in any of the Post Office/ Nationalized Bank in H.P. duly pledged in favour of the Executive Engineer, (B&R) Division, H.P.PWD, Sarahan must accompany with each applications/tender. Conditional tenders and the tenders received without earnest money will simultaneously be rejected. The offer of the tender shall be kept open for 75 days. The undersigned reserves the right to reject the any or all tender without assigning any reason.

| S N | 7 | | | | |
|--------|--|----------------------------|---------------|-------------|--------------|
| 1 | Last date for tender receipt of application for tender form | 27-04-2026 up to 4:00 PM | | | |
| 2 | Last date of sale of tender forms | 28-04-2026 up to 1:00 PM | | | |
| 3 | Date of receipt of tender forms | 28-04-2026 up to 03:00 P.M | | | |
| 4 | Date of opening of tenders | 28-04-2026 at 04 :30 P.M | | | |
| Sr. No | Name of Work | Estt. Cost | Earnest Money | Time Limit | Cost of Form |
| 1 | R/R damages on Machher Jabiyana Wasni road Km 0/0 to 8/500 (SH:- C/O PCC R/wall at RD 7/415 to 7/430) | 498041 | 10000 | Three month | 350/- |
| 2 | R/R Damages on Naina Tikker Dhangyar road Km 0/0 to 11/00 (SH:- C/O R/wall in G.I wire crate at RD 1/240 to 1/253) | 490411 | 10000 | Three month | 350/- |
| 3 | R/R Damages on Lawassa Chowki Preet nagar road Km 0/0 to 42/0 (SH;- Providing and laying WMM layers in Km 34/00 to 35/500) | 495715 | 10000 | Three Month | 350/- |
| 4 | R/R damages on Marighat Kerry Shutiya road Km 0/0 to 23/0 (SH:- C/O PCC R/wall at RD 13/200 to 13/212) | 492443 | 10000 | Three Month | 350/- |

Certificate:-It is certified that the above work are of urgent nature and essential for public safety or restoration of infrastructure.

Terms & conditions:-


1. The contractors/Bidders must submit their Permanent Income Tax Account Number/GST number on the tender along with copy of the same be attached with the application.
2. The contractor/Firms should attached copy of the Registration/Renewal with the application.
3. The contractors/bidders must inspect the site to ascertain/familiar the site conditions, accessibility etc. Before quoting the bid/tender.
4. Conditional and telegraphic tender will not be accepted and rejected straightway. Tender received after due date and time shall not entertained.
5. The contractor shall have to establish testing laboratory at site for the day to day testing of material.
6. The Executive Engineer reserves the right to reject or cancel any or all the tenders without assigning any reason.


Executive Engineer
Sarahan B&R Division.
HP.PWD, Sarahan.
Dated:- 22/4/2026

No.PW/SRN/CB-Estt-Tender/2024-25-

Copy forwarded for information and necessary action to:-

1. The Engineer-in-Chief, HP.PWD, Shimla-171002.
2. The Chief Engineer (South) HP.PWD, Shimla-171002.
3. The Executive Engineer (IT Cell), Nigam Vihar, HPPWD Shimla-2 for uploaded of Notice Inviting Tenders on Departmental website please.
3. The Superintending Engineer, 12th Circle HPPWD Nahan.
4. All the Assistant Engineers working under this Division.
6. All Intending Bidders/Contractors.


Executive Engineer
Sarahan B&R Division.
HP.PWD, Sarahan

SCHEDULE OF QUANTITY


Name of work:-R/R. damages on Naina Tikker Dhangyar road km 0/0 to 11/00 (SH:- C/O R/Wall in G.I wire crate at RD 1/240 to 1/253)

Estimated cost:-Rs. 4,90,411/-

Earnest money:- Rs 10,000

Time-Limit:- Three-Months

| Sr. No | Description Items of work | Qty. | Unit | Rate | | Amount |
|--------|---|--------|------------------|-------------|--|-----------|
| | | | | in figures. | in words | |
| 1 | Earth work in excavations for structure as per drawing and technical specifications clause 305.1 (Clause Threehundred Five point One) including setting out, construction of shoring and bracing removal of stumps and other deleterious material and disposal upto a lead of 50m, dressing of sides and bottom and backfilling in trenches with excavated suitable material in all leads and lifts to the entire satisfaction as per direction of Engineer-in-Charge. | 3 | Per Cubic Metre. | 5 | 6 | 14251.00 |
| 2 | Providing and laying of boulder apron laid in wire creates with 4mm dia GI wire conforming to IS:280 and IS:4826 in 100mm x 100mm mesh (woven diagonally) including 10 per cent extra for laps and joints laid with stone boulders weighing not less than 25 kg each as per drawing and technical specification clause 1301 as per drawing and HP PWD technical specifications in carriage of all labour equipments and materials to various locations through all modes of transportations in all leads and lifts to the entire satisfaction as per direction of Engineer-in-Charge. | 154.44 | Per Cubic Metre. | 2942.90 | Rupees two thousand nine hundred forty two and paise ninety only | 454501.00 |
| 3 | Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8 in granular material and as per direction of the Engineer-in-Charge, including carriage of all labour equipments and materials to various locations through all modes of transportation in all leads and lifts to the entire satisfaction of the Engineer-in-Charge. | 27.43 | Per Cubic Metre. | 789.60 | Rupees seven hundred eighty nine and paise sixty only | 21659.00 |
| | | | | | | 490411.00 |


 Executive Engineer
 Sarahan Division
 HP PWD, Sarahan

SCHEDULE OF QUANTITY


Estimated cost:-Rs 4,95,715/-

Name of work:- R/R Damages on Lawassa Chowki Preet Nagar road km 0/0 to 42/0 (SH:- Providing and laying WMM layers in km 34/00 to 35/500)

Earnest money:- Rs. 10,000/-

Time Limit:- three Months.

| Sr. No | Description Items of work | Qty. | Unit | Rate | | Amount |
|--------|---|--------|-----------------|-------------|---|-----------|
| | | | | in figures. | in words | |
| 1 | 1. Providing, laying, spreading and compacting graded stone aggregate to wet mix macadam specification including premixing the material with water at OMC in mechanical mixer (Pug Mill), carriage of mixed material by tipper to site, laying in uniform layers in sub-base/base course on a well prepared sub-base and compacting with smooth wheel roller of 80 to 100kN weight to achieve the desired density including lighting, barricading and maintenance of diversion, etc as per Tables 400.11 & 400.12 and Technical Specification Clause 406. | 198.00 | Per cubic Metre | 2503.61 | Rupees two thousand five hundred three and paise sixty one only | 495715.00 |
| | | | | | | 495715.00 |


 Executive Engineer
 Sarahan Division
 H.P. PWD, Sarahan

SCHEDULE OF QUANTITY

Name of Work:- R/R Damages on Marighat ka ghat Kerry Shutiya Road km 0/0 to 23/00 (SH:-C/O PCC R/Wall at RD 13/200 to 13/212)

Estimated cost:-Rs.4,92,443/-

Earnest money:- Rs. 10,000/-

Time Limit:- Three Months.

| Sr. No | Description Items of work | Qty. | Unit | Rate | | Amount |
|--------|--|--------|------------------|-------------|--|-----------|
| | | | | in figures. | in words | |
| 1 | Earth work in excavations for structure as per drawing and technical specifications clause 305.1 (Clause ThreeHundred Five point One) including setting out, construction of shoring and bracing removal of stumps and other deleterious material and disposal upto a lead of 50m, dressing of sides and bottom and backfilling in trenches with excavated suitable material in all leads and lifts to the entire satisfaction as per direction of Engineer-in-Charge. | 51.96 | Per Cubic Metre. | 261.00 | Rupees Two hundred sixty one and paise nil only | 13562.00 |
| 2 | Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications C- 802, 803, 1202 & 1203(Clause - Eight hundred Two, Eight hundred Three, One thousand Two hundred Two and One thousand Two hundred Three) 1:4:8. (One Cement : Four Sand : Eight graded stone) aggregate 25 mm nominal size and curing complete including the cost of form work and carriage of all labour equipments and materials to various locations through all modes of transportations in all leads and lifts to the entire satisfaction as per direction of Engineer-in-Charge. | 87.72 | Per Cubic Metre. | 5166.45 | Rupees five thousand one hundred sixty six and paise forty five only | 453201.00 |
| 3 | Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm (One Hundred) dia PVCpipe extending through the full width of the structures with slop of 1(V):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 (Clause - Six hundred Fourteen, Seven hundred Nine, One thousand Two hundred Four point Three point Seven) ,including hauling /carriage of all labour equipments and materials to various locations through all modes of transportations in all leads and lifts to the entire satisfaction as per direction of Engineer-in-Charge | 44.000 | Each | 280.00 | Rupees two hundred eighty and paise nil only | 12320.00 |
| 4 | Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8 in granular material and as per direction of the Engineer-in-Charge, including carriage of all labour equipments and materials to various locations through all modes of transportation in all leads and lifts to the entire satisfaction of the Engineer-in-Charge. | 16.92 | Per Cubic Meter. | 789.60 | Rupees seven hundred eighty nine and paise sixty only | 13360.00 |
| | | | | | | 492443.00 |

Estimated cost:-Rs.4,92,443/-
 Earnest money:- Rs. 10,000/-
 Time Limit:- Three Months.

Signature
 H.P.P.W.D., Saruhan