


HPPWD TENDER

Sealed item rate tenders are hereby invited by the Executive Engineer, Sundernagar Division, H.P.P.W.D. Sundernagar on behalf of Governor of H.P. for the below noted works from eligible contractors registered in HPPWD in appropriate class so as to reach in this office on or before **13.10.2022** upto 11.00 AM and the same will be opened on the same day at 11:30 AM in the presence of the contractors or their authorized representatives who may be present. The applications for issue of tender form shall be received upto 12:00 Noon on **12.10.2022**.

The tender shall accompany with earnest money which should be in shape of NSC/ Time deposit/ saving bank account in the post office/ Bank in HP duly pledged in favour of the Executive Engineer, Sundernagar Division, H.P.P.W.D. Sundernagar. Conditional tenders, telegraphic tenders and tenders without earnest money will not be entertained. The executive Engineer reserves the right to accept or reject the tenders. The tender shall remain valid for 75 days from the date of opening of tenders.

Sr. No.	Name of work	Estimated cost (Rs.)	Earnest Money	Tender Cost	Time
1	RRD on Kapahi Fagyara via Dharmeda road Km 0/0 to 3/0 (SH: C/o B/wall at RD 1/160 to 1/175)	241616	5500	350	Two Month
2	RRD on Luhardi to Banoun Kothi via Bangaloo road KM 0/0 to 5/800 (SH: C/o B/wall at RD 4/497 to 4/502 and 4/504 to 4/509.50)	132880	3000	350	Two Month
3	C/o Panjaryala to Fagla Dhar road Km 0/0 to 3/0 (SH: Prov. and laying WBM (G-I) at KM 1/450 to 1/900) under SCSP.	499238	10000	350	Two Month
4	A/R & M/O Kangoo to Dehar road Km 0/0 to 7/0 (SH: C/o edge wall at RD 5/500 to 5/530)	146501	3000	350	Two Month
5	C/o Harizan Basti Harabag Madhan Mangalwana road KM 0/0 to 1/100 (SH: Prov. and laying G-II and PCC V-shape drain in KM 0/0 to 0/550) SCDP.	482010	10000	350	Two Month
6	RRD on Sundernagar Maloh road Km 0/0 to 5/565 (SH: C/o R/wall at RD 1/226 to 1/231)	176493	4000	350	Two Month
7	A/R & M/O on Sundernagar to Serikothi via Keran road KM 0/0 to 3/700 (SH: C/o U-shape drain at KM 3/066 to 3/141) Valley side) Job No.I.	402573	8500	350	Three Month
8	RRD on Slapper Tattapani road KM 0/0 to 66/0 (SH: Removal of slips at various reches in between KM 29/400 to 31/400)	349650	7000	350	One Month
9	Black Spot on Pandar Tattapani road KM 0/0 to 12/0 (SH: Curve cutting at various reaches in KM 0/0 to 3/0)	443759	9000	350	One Month

Certified that the above works are of urgent nature and require to be executed immediately in the larger public interest.


Executive Engineer,
Sundernagar Division,
H.P.P.W.D. Sundernagar.

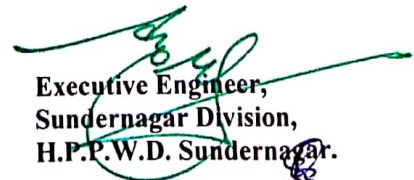
No: - PW/SNR-E-Tender/Giriraj/2022-

14747-60

Dated: 6 .10.2022

Copy forwarded to the following for information and publicity:

1. The Superintending Engineer, 1st Circle H.P.P.W.D. Mandi.
2. The Executive Engineer (I.T) O/o Engineer-in-Chief, HPPWD Shimla (HP) eeict-pwd-shi@hp.gov.in for uploading the NIT on departmental website please.
3. All the Assistant Engineers working under this Division.
4. Various Contractors working under Sundernagar Division.
5. Notice Board.

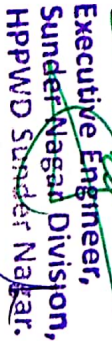

Executive Engineer,
Sundernagar Division,
H.P.P.W.D. Sundernagar.

SCHEDULE OF QUANTITY

Name of Work :- RRD on Kapahi Fagayara via Dharmeda km 0/0 to 3/00 (SH:- C/o B/ wall at RD. 1/160 to 1/175)

Estimate Cost: Rs. 2,41,616/- only
Earnest Money: Rs 5500/- only
Time : Three months

S. No.	Sub Head and item of work	Qty.	Rate in		Unit	Amount
			Figure	Word		
1	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom, backfilling the excavation earth to the extent required and utilising the remaining earth locally for road work within all leads, lifts and carriage of materials and other incidentals.	54.90 cum			Per Cubic metre	
2	Providing and laying cement concrete 1:6:12 (one cement : six sand twelve graded crashed stone aggregate 40mm (forty millimeter) size for plain / reinforced concrete in open foundation complete as per drawings and technical specification, clause 802,803,1202 & 1203 within all leads, lifts and carriage of materials and other incidentals.	6.45 cum			per Cubic metre	
3	Stone masonry in cement mortar for foundation complete as per drawing and technical specification clause 702, 704,1202 and 1204 (Random rubble masonry in cement mortar . 1:6 (one cement : six sand) within all leads, lifts and carriage of materials and other incidentals.	22.54 cum			per Cubic metre	
4	Construction of dry rubble masonry for retaining walls, breast walls, revetment walls and parapets etc. for sub-structure and super structure complete as per drawing and technical specification clauses 704.6 & 1302.5 within all leads, lifts and carriage of materials and other incidentals	34.32 cum			per Cubic metre	
					Total	


Executive Engineer,
Sunder Nagar Division,
HPPWD Sunder Nagar.

SCHEDULE OF QUANTITY

Name of Work :- RDD on Luhardi to Banoun kotni via Bangaloo road km 0/0 to 5/800 (SH:- C/o B/ wall at RD. 4/497 to 4/502 & 4/504 to 4/509.50)

Estimate Cost: Rs. 1,32,880/- only
 Earnest Money: Rs 3000/- only
 Time : Three month

S. No.	Sub Head and item of work	Qty.	Rate in		Unit	Amount
			Figure	Word		
1	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom, backfilling the excavation earth to the extent required and utilising the remaining earth locally for road work within all leads , lifts and carriage of materials and other incidentals .	13.45 cum			Per Cubic metre	
2	Providing and Laying concrete for plain/reinforced concrete P.C.C. nominal mix 1:5:10 (one cement : five sand ten graded crashed stone aggregate) 40mm (fortymillimetre) nominal size in open foundations complete as per drawing and technical specification clauses 802, 803, 1202 and 1203 within all leads , lifts and carriage of materials and other incidentals .	29.72 cum			Per Cubic metre	
3	Providing weep hole in brick masonry / stone masonry /plain reinforced concrete abutment wing wall return wall with 100 mm (one hundred millimetre) dia PVC pipe extended through the full width of the structures with slope of 1 (v) :20 (H) towards drawing face complete as per drawing and technical specification clause 614.709& 1204.3.7 within all leads , lifts and carriage of materials and other incidentals .	20.00 Nos			Each	
					Total	


 Executive Engineer,
 Sunder Nagar Division,
 HPPWD Sunder Nagar

SCHEDULE OF QUANTITY


Estimated cost Rs. 4,99,238/- only

Earnest Money Rs. 10,000/- Only

Time : Three Month

Name of work :- C/o Panjryala to Fagla Dhar road km 0/00 to 3/00 (SH:- Providing and laying WBM (G-1) at km 1/450 to 1/900) under SCDP

S.No.	Description of items	Quantity	Rate		Unit	Amount
			in figure	in word		
1	Preparation and consolidation of sub grade with power road roller of 8 to 12 tonne capacity after excavating earth to an average of 22.5 cm depth, dressing to camber and consolidating with road roller including making good the undulations etc. and re-rolling the sub grade and disposal of surplus earthwith lead upto 50 metres including all leads, lifts of material and other incidentals.	1559.25			Per Square metre	
2	Providing, Laying , spreading and compacting stone aggregates of specific sizes 90 to 45 mm (Ninety to forty five millimetre) to water bound macadam specification including spreading in uniform thickness, hand packing , rolling with three wheel 80-100 kN static roller in stages to proper grade and camber , applying and brooming, stone screening/ binding materials to fill-up the interstices of coarse aggregate , watering and compacting to the required density. Grading -1 as per Technical specification Clause 405 (By manual. means) including all leads, lifts of material and other incidentals.	155.93			Per cubic metre	
					Total	


Executive Engineer,
Sunder Nagar Division,
HPWD Sunder Nagar

SCHEDULE OF QUANTITY

Estimate Cost: Rs. 1,46,501/- only

Earnest Money: Rs 3,000/- only

Time : Three Months

Name of Work :- A/R & M/O on Kangoo to Dehar road km 0/0 to 7/00 (SH:- C/o Edge wall at RD. 5/500 to 5/530)

S. No.	Sub Head and item of work	Qty	Rate in		Unit	Amount
			Figure	Word		
1	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom, backfilling the excavation earth to the extent required and utilising the remaining earth locally for road work within all leads, lifts and carriage of materials and other incidentals.	32.25 cum			Per Cubic metre	
2	Providing and Laying concrete for plain/reinforced concrete P.C.C. nominal mix 1:5:10 (one cement : five sand ten graded crushed stone aggregate) 40mm (fortymillimetre) nominal size in open foundations complete as per drawing and technical specification clauses 802, 803, 1202 and 1203 within all leads, lifts and carriage of materials and other incidentals.	34.43 cum			Per Cubic metre	
					Total	

[Signature]
 Sd/- Subdar Nishu
 Subdar Nishu

SCHEDULE OF QUANTITY

Name of Work :- C/o Harizan Basti Harabag Madhan Mangalwana road km 0/0 to 1/100 (SH:- Providing and laying G-II and PCC v-shape drain kn km 0/00 to 0/550) SCDD

Estimate Cost: Rs. 4,82,010/- only
Earnest Money: Rs 10,000/- only
Time : three months

S.No.	Sub Head and item of work	Qty.	Rate in		Unit	Amount
			Figure	Word		
1	Providing , Laying , spreading and compacting stone aggregates of specific sizes 63 to 40 mm (sixty three to forty millimetre) to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with three wheel 80-100 kN static roller in stages to proper grade and camber , applying and brooming, stone screening/ binding materials to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading -II as per Technical specification Clause 405 (By Mech. means) including all leads , lifts of material and other incidentals.	132.10 cum			per Cubic metre	
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom, backfilling the excavation earth to the extent required and utilising the remaining earth locally for road work within all leads , lifts and carriage of materials and other incidentals.	34.20 cum			Per Cubic metre	
3	Plain cement concrete 1:3:6 (one cement : three coarse sand :six graded stone aggregate 20 mm (twenty millimetre) nominal size) nominal mix in foundation with crushed stone aggregate 40 mm nominal size mechanically mixed, placed in foundation and compacted by vibration including curing for 14 days.including carriage of materials with in all leads, lifts and other incidentals.	26.60 cum			Per Cubic Metre	
					Total	


Executive Engineer,
Sunder Nagar Division,
HPPWD-Sunder Nagar.

SCHEDULE OF QUANTITY

Estimate Cost: Rs. 1,76,493/- only
Earnest Money: Rs 4000/- only
Time : three months

Name of Work :- RRD on Sundernagar Maloh road km 0/0 to 5/565 (SH:- C/o R/ wall at RD. 1/226 to 1/231)

S. No.	Sub Head and item of work	Qty.	Rate in		Unit	Amount
			Figure	Word		
1	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom, backfilling the excavation earth to the extent required and utilising the remaining earth locally for road work within all leads, lifts and carriage of materials and other incidentals.	15.96 cum			Per Cubic metre	
2	Providing and laying cement concrete 1:6:12 (one cement : six sand twelve graded crashed stone aggregate 40mm (fortymillimetre) size for plain / reinforced concrete in open foundation complete as per drawings and technical specification clause 802,803,1202 & 1203 M10 within all leads, lifts and carriage of materials and other incidentals.	4.32 cum			per Cubic metre	
3	Stone masonry in cement mortar for foundation complete as per drawing and technical specification clause 702, 704,1202 and 1204 (Random rubble masonry in cement mortar . 1:6 (one cement : six sand) within all leads, lifts and carriage of materials and other incidentals.	18.33 cum			per Cubic metre	
4	Providing and Laying concrete 1:4:8 (one cement : four sand : eight graded crushed stone aggregate 40mm (forty millimeter) nominal size for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802, 803, 1202 and 1203 within all leads, lifts and carriage of materials and other incidentals.	2.64 cum			per Cubic metre	
5	Construction of dry rubble masonry for retaining walls, breast walls, revetment walls and parapets etc. for sub-structure and super structure complete as per drawing and technical specification clauses 704.6 & 1302.5 within all leads, lifts and carriage of materials and other incidentals	17.68 cum			per Cubic metre	
6	Back filling with stone behind abutment, wing wall and return wall complete as per drawing and technical specification clause 1204.3.8 stone/ granular material within all leads, lifts and carriage of materials and other incidentals.	6.54 cum			Per Cubic metre	
					Total	


[Signature]
Executive Engineer,
Sunder Nagar Division,
HPPWD Sunder Nagar.

SCHEDULE OF QUANTITY

Estimate Cost: Rs.4,02,573/- only
Earnest Money: Rs 8,500/- only
Time : three months

Name of Work :- A/R & M/O Sundernagar to Serikothi via keran road km 0/0 to 3/700 (SH:- C/o U-shape drain at km 3/066 to 3/141)
Valley side Job No-1

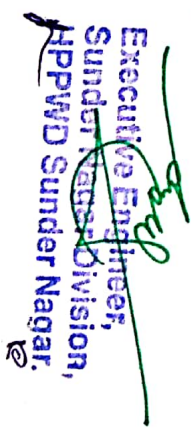
S.No.	Sub Head and item of work	Qty	Rate in		Unit	Amount
			Figure	Word		
1	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom, backfilling the excavation earth to the extent required and utilising the remaining earth locally for road work within all leads, lifts and carriage of materials and other incidentals.	84.75 cum			Per Cubic metre	
2	Plain cement concrete 1:3:6 (one cement : three coarse sand : six graded stone aggregate 20 mm (twenty millimetre) nominal size) nominal mix in foundation with crushed stone aggregate 40 mm nominal size mechanically mixed, placed in foundation and compacted by vibration including curing for 14 days including carriage of materials with in all leads, lifts and other incidentals.	17.25 cum			Per Cubic Metre	
3	Random rubble masonry with hard stone in foundation and plinth including levelling up with cement concrete 1:6:12 (one cement : six coarse sand : twelve graded stone aggregate 20 mm nominal size) upto plinth level with Cement mortar 1:6 (one cement : six coarse sand) within a lead of any metre within all leads, lifts and carriage of materials and other incidentals.	67.50 cum			Per Cubic Metre	
					Total	


Executive Engineer,
Sunder Nagar Division,
HPPWD Sunder Nagar.

SCHEDULE OF QUANTITY

Estimate Cost: Rs. 3,49,650/- only
 Earnest Money: Rs 7000/- only
 Time : One month
Name of Work :- RRD on Slapper Tattapani road km 0/00 to 66/00 (SH:- Removal of slips at various reaches between km 29/400 to 31/400)

S. No.	Sub Head and item of work	Qty.	Rate in		Unit	Amount
			Figure	Word		
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto any metre and lead into any metre as per technical specification 302.3.5 and 1611 as per direction of Engineer in charge with in all leads lifts and carriage of materials and other incidentals.	3885.00 cum			per cubic metre	
					Total	


 Executive Engineer,
 Sunder Nagar Division,
 HPPWD Sunder Nagar.

Estimated Cost:- Rs. 4,43,759/-only

Time allowed:- One Month.

Description of item

Executive Engineer,
Sunder Nagar Division,
H.P.W.B. Sunder Nagar