

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT**

NO:-PW-SD-CB/Tender/NIT/2020-Vol-XI-593-96 Dated:-04/05/2023

To

The Director Public Relation,
Himachal Pradesh, Shimla-171002.

Subject:-

Notice Inviting Tender.

Enclosed kindly find herewith Tender Notice for publication in Giriraj and three leading news papers at the earliest possible as Spiti Valley has very limited working season. The said notice has been up-loaded on online portal.
Encl:-As above.

Executive Engineer,
Spiti B&R Division,
HP.PWD; KAZA.

Copy for information alongwith notice inviting tender is forwarded to :-

1. The Additional Deputy Commissioner, Spiti at Kaza.
2. The Engineer-in-Chief, HP.PWD., Nigam Vihar Shimla-2.
3. The Chief Engineer, Shimla Zone HP. PWD., Shimla.
4. The Superintending Engineer, 11th Circle, HP. PWD., Rampur.

Executive Engineer,
Spiti B&R Division,
HP.PWD; KAZA.

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
*NOTICE INVITING TENDER***

Sealed rate/percentage rate tenders are hereby invited by the Executive Engineer, Spiti B&R Division, HP.PWD; Kaza on behalf of the Governor of Himachal Pradesh for the below noted works from eligible Contractors registered in H.P.P.W.D. in appropriate class so as to reach in this office on or before 23/05/2023 up to **10:30 AM** and the same shall be opened on the same day at **11:00 AM**. in the presence of the Contractors or their authorized representatives who may be present. The tender forms can be had from this office against cash payment (Non Refundable) on **20/05/2023 between 2:00PM to 5:00PM**.

The tender shall accompany with earnest Money which should be in the shape of NSC/Time Deposit/Saving Bank account in the Post Office/bank in H.P. duly pledged in the favour of undersigned.

Conditional tenders, telegraphic and tender without earnest money will not be entertained. The Executive Engineer, Spiti B&R Division, HP.PWD; Kaza reserves the right to accept or reject the tenders. The tender shall remain valid for 90 days from the date of opening of the tenders.

Sr. No.	Name of work.	Estimated Cost.	Earnest money.	Time.
1.	A/R & M/O Various under Kaza Division (SH:- Balance work of binding office records file with card board on both side of file in respect of various branches of Kaza as well as Sub-Divisions)	205000/-	5000/-	One Month
2.	Restoration of snow /rain damages on Batal to Chandertal road Km. 0/00 to 12/500 (SH:- Improvement & widening of narrow reaches at RD. 02/455 to 2/680)	471263/-	9500/-	Six months
3.	Restoration of snow /rain damages on Batal to Chandertal road Km. 0/00 to 12/500 (SH:- Improvement & widening of narrow reaches at RD. 02/210 to 2/450)	487708/-	9800/-	Six months
4.	Restoration of snow /rain damages on Kiato Chicham road Km. 0/00 to 19/600 (SH:- Improvement & widening of narrow reaches at RD. 10/000 to 10/300)	480501/-	9700/-	Six months
5.	Restoration of snow /rain damages on Kiato Chicham road Km. 0/00 to 19/600 (SH:- Improvement & widening of narrow reaches at RD. 10/500 to 10/800)	482601/-	9700/-	Six months
6.	Restoration of snow /rain damages on Chandertal road Km. 0/00 to 9/000 (SH:- Improvement & widening of narrow reaches at RD. 10/500 to 10/800)	497991/-	10000/-	Six months

TERMS AND CONDITIONS:-

The Contractor/Firm shall have his/their PAN, GST No. & copy of the same be attached with the application.

The intending Contractor/Firm Should have attached copy of registration/renewal, copy of registration under EPF & miscellaneous provision Act-1952 with application.


The intending Contractors are requested to see the site of the work before submitting the tender.

Tender document shall be issued to those contractors/Firms who submitted the certificate from Executive Engineer concerned to the effect the he has completed successfully similar nature of works during last three years in respect of tarring work.

Tender forms for two works only shall be issued to each Contractor who has no previous pending works.

The Executive Engineer reserves the right to reject/accept any or all the tenders without assessing any reasons.

HIMSUCHANA AVAM JANSAMPARK


**Executive Engineer
Spiti B&R Division
HPPWD Kaza**

SCHEDULE OF QUANTITY

Estimate Cost Rs:- 205000/-

Earnest Money Rs. 5000/-

Cost of form Rs. 350/-

Time limit: - One Month

Name of Work:- A/R & M/O Various Road under Kaza Division.(SH:-Balance work of binding office records file with card board on both side of file in respect of various branches of Kaza Division as well as Sub-Divisions)

Sr. No.	Description of item	Qty.	Rates		Unit	Amount
			In Figure	In Word		
1.	Binding of old office record file with cardboard on both side of file fixing binding cloth on edge of file and every paper on cardboard with proper adhesive material like fevicol, glue etc. and sewing the file with durable superior rode of suitable material complete in all respect as per the direction of Engineer-in-charge within all leads and lifts and other incidental charges.	1000			Each	
					Total	

Executive Engineer.
Spiti (B&R) Division.
HP.PWD. Kaza.

SCHEDULE OF QUANTITY

Estimated Cost: -	471263.00
Earnest Money: -	9500.00
Time: -	Six Months

2

Name of Work : Restoration of snow /Rain damages on Batal to Chandertal Road km 0/00 to 12/500 (SH: Improvement and widening of narrow reaches at Rd 2/455 to 2/680)

Description of Item	Qty	Unit	Rate	In Figure	Amount
Excavation in soil in Hilly Area by mechanical means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m (one point five meter) and a lead upto 20 m (twenty meter) as per Technical Specification Clause 1603.1(one six zero three point one) and MORD specification including carriage of all labour equipment and materials to various location of site through all modes of transportations in all leads lifts and all incidental charges. Any loss to the public and private property during the course of execution shall be the absolute responsibility of the contractor which shall have to be duly compensated by him at his own cost in all cases.	1594.80	Per cubic metre			

Executive Engineer,
Spiti B&R Division,
H.P.P.W.D; Kaza.

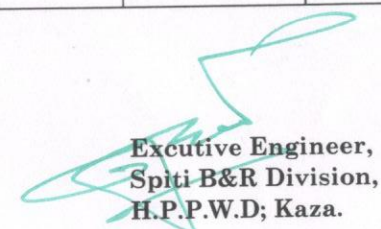
3

SCHEDULE OF QUANTITY

Estimated Cost: -	487708.00
Earnest Money: -	9800.00
Time: -	Six Months

Name of Work : Restoration of snow /Rain damages on Batal to Chandertal Road km 0/00 to 12/500 (SH: Improvement and widening of narrow reaches at Rd 2/210 to 2/450)

Description of Item	Qty	Unit	Rate	In Figure	Amount
Excavation in soil in Hilly Area by mechanical means including cutting and trimming of side slopes and disposing of excavated earth with a lift upto 1.5 m (one point five meter) and a lead upto 20 m (twenty meter) as per Technical Specification Clause 1603.1(one six zero three point one) and MORD specification including carriage of all labour equipment and materials to various location of site through all modes of transportations in all leads lifts and all incidental charges. Any loss to the public and private property during the course of execution shall be the absolute responsibility of the contractor which shall have to be duly compensated by him at his own cost in all cases.	1650.45	Per cubic metre			
				Total:-	


Executive Engineer,
Spiti B&R Division,
H.P.P.W.D; Kaza.

SCHEDULE OF QUANTITY

Estimated Cost: -	480504.00
Earnest Money: -	9700.00
Time: -	Six Months

Name of Work :Restoration of snow /rain damages on Kiato Chicham road Km. 0/00 to 19/600 (SH:- Improvement & widening of narrow reaches at RD. 10/000 to 10/300)

Description of Item	Qty	Unit	Rate	In Figure	Amount
Providing and laying, spreading by mechanical means and compacting stone aggregate of specific sizes to water bound macadam grading-II specification including spreading in uniform thickness, hard packing, rolling with smooth wheel roller 80-100 KN in stages to proper grade and camber, applying and bromming, store screening to fill up the interstices of course aggregate, watering and compacting to required density as per technical specification clause-405 (four zero five)-A and MORD specification including carriage of all labour equipment and materials to various location of site through all modes of transportations in all leads lifts and all incidental charges	1626.07	Per cubic metre			
				Total:-	

Excutive Engineer,
Spiti B&R Division,
H.P.P.W.D; Kaza.

DRAFT SCHEDULE OF QUANTITY

Estimated cost:- 482601/-

Earnest money:- 9700/-

Time:- Six Months

NAME OF WORK:- Restoration of snow/rain damages on Kiato Chicham road Km. 0/000 to 19/600 (SH:- Improvement & widening of narrow reaches at RD 10/500 to 10/800)

S. No.	Description of Items	Quantity	Unit	Rate		Amount
				In Figure	In Word	
1	Excavation in soil in Hilly area by mechanical means including cutting and trimming of side dlopes and disposing of excavated earth with a lift upto 1.5m (one point five meter) and a lead upto 20m (twenty meter) as per technical specification clause 1603.1 and MORD speccification inculding carriage of all labour equipment and materials to various lacion of site through all modes of transportations in all leads lifts and all incidental charges. Any loss to the public and private property during the course of excution shall be the absolute responsibility of the contractor which shall have to ghe duly compensated by him at his own cost in all cases.	1544.50	Per cubic meter			

Executive Engineer,
Spiti Division B&R,
HPPWD, Kaza

6

DRAFT SCHEDULE OF QUANTITY


Estimated cost:- ~~4~~97991/-

Earnest money:- 10000/-

Time:- Six Months

NAME OF WORK:- Restoration of snow/rain damages on Chandertal road Km. 0/000 to 9/000 (SH:- Improvement & widening of narrow reaches at RD 10/500 to 10/740)

S. No.	Description of Items	Quantity	Unit	Rate		Amount
				In Figure	In Word	
1	Excavation in soil in Hilly area by mechanical means including cutting and trimming of side dlopes and disposing of excavated earth with a lift upto 1.5m (one point five meter) and a lead upto 20m (twenty meter) as per technical specification clause 1603.1 and MORD speccification inculding carriage of all labour equipment and materials to various lacion of site through all modes of transportations in all leads lifts and all incidental charges. Any loss to the public and private property during the course of excution shall be the absolute responsibility of the contractor which shall have to ghe duly compensated by him at his own cost in all cases.	1685.26	Per cubic meter			


Executive Engineer,
Spiti Division B&R,
HPPWD, Kaza