

**HIMACHAL PRADESH  
PUBLIC WORKS DEPARTMENT  
NOTICE INVITING TENDER**

Short terms tenders on form 6&8 are hereby invited by the Executive Engineer Bangana Division HP.PWD Bangana on behalf of the Governor of H.P. for the following works from the approved and eligible contractors/firms of appropriate class enlisted in HPPWD as per latest instructions so as to reach and open in his office as per time schedule given below The offer of the tender will be kept open for 120 days from the date of opening of the tenders. The undersigned reserves the right to reject any or all the tenders without assigning any reasons.

- |   |                                 |                                  |
|---|---------------------------------|----------------------------------|
| 1. Date of receipt of applications for the tender | Form a/w requisite documents: - | 05.08.2023 upto 5.00 PM.         |
| 2. Date of issue /sale of tender forms against    | Cash payment (Non-refundable):- | 07.08.2023 upto 2:00 to 5.00 PM. |
| 3. Date of receipt of tenders: -                  |                                 | 08.08.2023 upto 10.30 AM.        |
| 4. Date of opening of tenders: -                  |                                 | 08.08.2023 at 11.00 AM.          |

Sr. No.	Name of Work	Estimated Cost	EMD	Time Limit	Cost of Tender	Eligible class of Contractor
1	C/o Combined Office building at Bangana Distt. Una (H.P.) (SH: P/F Powder Fire Extinguisher)	99000	2000	Two month	350	Class-D
2	C/o Combined Office building at Bangana Distt. Una (H.P.) (SH: P/F Powder Fire Extinguisher)	99000	2000	Two month	350	Class-D
3	RRD on Tanoh Basater road Km 0/000 to 4/000 (SH: C/o Wire crate from RD 3/828 to 3/850 )	499620	10000	Two month	350	Class-D
4	Repair of R.C.C. T-Beam Bridge 202.963 meter span over Dhamandri khad at Badsala (SH: Repair of Pier No. 5)	427207	8600	Two month	350	Class-D

The Earnest money in the shape of National Saving certificate/Time deposit/Saving account of any post office or FDR of Nationalised Bank duly pledged in the name of undersigned must be accompanied with each tender. The conditional tender and tender not accompanying the earnest money in the proper mode of deposit will summarily be rejected.

The Tender documents to be sent should have invariably be waxed in sealed cover and in failure of that those will not be entertained.

The Copy of valid enlistment, GST Registration No., Income Tax PAN No & EPF No. must be attached with application.

**SPECIAL CONDITION:-**

- The tender form will be issued to those contractors who have relevant machinery and equipment, the list of which may be attached with their applications.(The proof of ownership of machinery/legal tie up arrangement).
- The tender form will not be issued to those contractors who have already two works in hand. The earnest money for the above work should be submitted with the application for the purchase of the tender forms. The application received without earnest money shall summarily be rejected.
- The conditional/ambiguous/telegraphic tenders or tender by fax shall not entertained/considered in any case.

Executive Engineer  
Bangana Division  
HPPWD Bangana.

No.PW/BGN/CB/T-1/2022-23-

Cop forwarded to the following for information and necessary action:-

- The Engineer-in-Chief HPPWD. Nirman Bhawan Shimla.
- All the Chief Engineer in HPPWD.
- The Superintending Engineer, 15th Circle, HPPWD., Una.
- All the Assistant Engineer, working under this Division.
- Various Contractors working under this Division
- Notice Board.


Dated

25/07/2023

Executive Engineer,  
Bangana Division,  
HPPWD Bangana.

## Certificate

Certified that the tenders called vide this office letter No. PW/BGN/CB/T-1/2022-23- 2724-53 dated 25/07/2023 is emergent nature and in public interest.

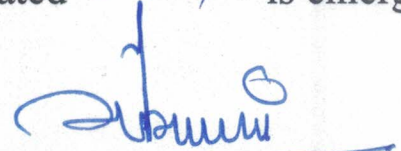

Executive Engineer,  
Bangana Division,  
HPPWD Bangana.



# Schedule of Quantity

Name of work: C/O Combiend office building at Bangana Distt.

Una ( H.P.) (P/F Powder Fire Extinguisher)

Estimated Cost:

99000

Earnest Money:

2000

Time Limit:

One mon

Sr. No.	Description of work	No.or Qty.	Unit	RATE in Figures and words		AMOUNT Rs. P
				Figures	Words	
1	Providing and fixing poder fire Extinguisher ( stored pressure type) capacity 9Kg ( nine kilogramme duly ISI marked confirming to IS: 15683:2006 with ISI14609, ISI marked ABC powder complete with squeeze grip release valve, discharge pipe, locking arrangement, pressure gauge, operation mannual, bracket with two screws and sleeve, including carriage of materials with in all leads and lifts and other incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	30.00 Number	Each			
Total in Figures						


  
Executive Engineer  
Bangana Division  
H.P.P.W.D.Bangana

# Schedule of Quantity

Name of work: C/O Combiend office building at Bangana Distt.  
Una ( H.P.) (P/F Powder Fire Extinguisher)

Estimated Cost: 99000.  
Earnest Money: 2000.  
Time Limit: One mon

Sr. No.	Description of work	No.or QTY.	Unit	RATE in Figures and words		AMOUNT Rs. P
				Figures	Words	
1	Providing and fixing poder fire Extinguisher ( stored pressure type) capacity 9Kg ( nine kilogramme duly ISI marked confirming to IS: 15683:2006 with ISI14609, ISI marked ABC powder complete with squeeze grip release valve, discharge pipe, locking arrangement, pressure gauge, operation mannual, bracket with two screws and sleeve, including carriage of materials with in all leads and lifts and other incidentals. The rates are inclusive of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	30.00 Number	Each			
Total in Figures						


  
Executive Engineer  
Bangana Division  
H.P.P.W.D.Bangana



## SCHEDULE OF QUANTITY

**Name of work:- R.R.D. on Tanoh Basater road Km 0/000 to 4/000 (SH: C/o Wire crate from Rd 3/828 to 3/850)**

Sr. No.	Description of work	Quantity	Unit	Estimated Cost Rs		
				Earnest Money Rs		
				Time Limit:	Two Month	
Figures	RATE	Words	AMOUNT	Rs.	P	
1	Earth work in excavation for all type of road structure such as retaining walls, breast walls, culverts and drains etc. in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock, chiselling/wedging out rocks( where blasting is prohibited ) as per drawings and M.O.R.D 2014 technical specification clause 305 and as per direction of the Engineer-in-charge including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto all leads and lifts including dressing of sides, bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm ( one hundred fifty millimeters) compacted thickness including shoring and strutting and pumping and bailing out water ( surface and sub soil water ) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per the direction of the Engineer-in-charge including carriage of material within all leads and lifts and other incidentals. The rate includes octroi, royalty, Malkana, toll tax, goods service tax, labour cess or other taxes imposed by the Government.	63.50	Per Cubic metre.			
2	Providing and laying of boulder apron laid in wire crates made with 4mm dia GI wire conforming to IS:280 and IS: 4826 in 100mm x 100mm ( one hundred millimetre) mesh (waved diagonally) including 10 (ten) per cent extra for laps and joints laid with stone boulders weighing not less than 25kg ( twenty five kilogramme) each as per drawing and technical specifications Clause No. 1301, including carriage of materials within all leads and lifts and other incidental. The rates are inclusive of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	144.38	Per cubic metre			
<b>Total Rs.</b>						

  
**Executive Engineer**  
**Bangana Division**  
**H.P.P.W.D. Bangana**

# Schedule of Quantity

**Name of Work:- Repair of R.C.C. T-Beam Bridge 202.963 meter span over Dhamandri khad at Badsala**  
**(( SH:-Repair of Pier No.5))**

Estimated Cost: 427207.00  
 Earnest Money: 8600.00  
 Time Limit: Two month

Sr. No.	Description of work	No.or Qty.	Unit	RATE in Figures and words		AMOUN Rs.
				Figures	Words	
1	Steel work welded in built up sections, trusses and framed work including cutting, hoisting, fixing in position and applying a priming coat of red lead paint complete in all respect including, framed guard bars ladders, railing brackets and similar works including entire carriage of material within all leads and lifts and other incidentals as per the direction by the Engineer-in-charge. The rates are inclusive octroi, royalty,malkhana, toll tax,sale tax,GST,labour cess or other taxes imposed by the Government.	1352.34	Per Kilogra mme			
2	Drilling suitable holes in reinforced or plain cement concrete with power driven drill machine to a minimum depth of 100mm upto 200mm in RCC beams, lintels, columns and slabs to introduce steel bars for sunshades/balconies including fixing the steel bars bolt /rod HIT make V- 5.8 M-20 X 500 in position using epoxy resin anchor grout of approved make HIT Make HIT RE-500 V4/500 or equivalent but excluding the cost of reinforcement, all complete as per direction of Engineer-In-Charge. including carriage of material with in all leads and lifts and other incidentals. The rate includes octroi, royalty,malkhana, toll tax,GST,labour cess or other taxes imposed by the Government.	62.00	Each			
3	Providing and injecting approved grout in proportion recommended by the manufacturer into cracks/honey-comb area of concrete/masonry by suitable gun/pump at required pressure including cutting of nipples after curing etc. complete as per directions of Engineer-in-Charge. (The payment shall be made on the basis of actual weight of approved grout injected.) Epoxy injection grout in concrete/RCC work of approved make. as per direction of Engineer-In-Charge. including carriage of material with in all leads and lifts and other incidentals. The rate includes octroi, royalty,malkhana, toll tax,GST,labour cess or other taxes imposed by the Government.	993.60	Per Kilogra mme			
<b>Total in Figures</b>						

**Executive Engineer**  
**Bangana Division**  
**M.P.W.D.Bangana**