

HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDER

Short terms tenders on form 6&8 are hereby invited by the Executive Engineer Bangana Division HP.PWD Bangana on behalf of the Governor of H.P. for the following works from the approved and eligible contractors/firms of appropriate class enlisted in HPPWD as per latest instructions so as to reach and open in his office as per time schedule given below The offer of the tender will be kept open for 45 days from the date of opening of the tenders. The undersigned reserves the right to reject any or all the tenders without assigning any reasons.

- | | |
|--------------------------------------------------------------------------------------|----------------------------------|
| 1. Date of receipt of applications for the tender
Form a/w requisite documents: - | 31.08.2023 upto 5.00 PM. |
| 2. Date of issue /sale of tender forms against
Cash payment (Non-refundable):- | 01.09.2023 upto 2:00 to 5.00 PM. |
| 3. Date of receipt of tenders: - | 02.09.2023 upto 10.30 AM. |
| 4. Date of opening of tenders: - | 02.09.2023 at 11.00 AM. |

Sr. No.	Name of Work	Estimated Cost	EMD	Time Limit	Cost of Tender	Eligible class of Contractor
1	Restoration of Rain Damages on various road under Bangana Sub-Division (SH: Removal of slip)	499824.00	10000.00	Two Month	350	Class-A to D
2	Stock Storage at Bangana Division (SH: Providing and supplying information Board)	435000.00	8700.00	Two Month	350	Class-D
3	Stock Storage at Bangana Division (SH: Providing and supplying information Board)	480000.00	9600.00	Two Month	350	Class-D
4	Restoration of Rain Damages on Bangana via Thathoon road Km 0/000 to 3/400 (SH: C/o B/wall at Rd 3/210 to 3/225)	173000.00	3500.00	Two Month	350	Class-D
5	C/o link road Harizan Basti Padyola Km 0/000 to 2/000 (SH: P/L Stone Soling & C.C. Pavement and Edge wall in Km 1/640 to 1/696) Under SCDP	492051.00	9900.00	Two Month	350	Class-D

The Earnest money in the shape of National Saving certificate/Time deposit/Saving account of any post office or FDR of Nationalised Bank duly pledged in the name of undersigned must be accompanied with each tender. The conditional tender and tender not accompanying the earnest money in the proper mode of deposit will summarily be rejected.

The Tender documents to be sent should have invariably be waxed in sealed cover and in failure of that those will not be entertained.

The Copy of valid enlistment, GST Registration No., Income Tax PAN No & EPF No. must be attached with application.

SPECIAL CONDITION:-

1. The tender form will be issued to those contractors who have relevant machinery and equipment, the list of which may be attached with their applications.(The proof of ownership of machinery/legal tie up arrangement).
2. The tender form will not be issued to those contractors who have already two works in hand.The earnest money for the above work should be submitted with the application for the purchase of the tender forms. The application received without earnest money shall summarily be rejected.
3. The conditional/ambiguous/telegraphic tenders or tender by fax shall not entertained/considered in any case

No.PW/BGN/CB/T-1/2023-24-

Cop forwarded to the following for information and necessary action:-

1. The Engineer-in-Chief HPPWD, Nirman Bhawan Shimla.
2. All the Chief Engineer in HPPWD.
3. The Superintending Engineer, 15th Circle, HPPWD, Una.
4. All the Assistant Engineer, working under this Division.
8. Various Contractors working under this Division
9. Notice Board.

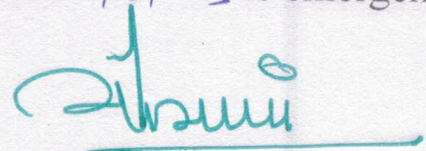
Dated

Executive Engineer
Bangana Division
HPPWD Bangana.

Executive Engineer,
Bangana Division,
HPPWD Bangana.

Certificate

Certified that the tenders called vide this office letter No. PW/BGN/CB/T-1/2022-23- 3681-3710 dated 23/08/2023 is emergent nature and in public interest.



Executive Engineer,
Bangana Division,
HPPWD Bangana.

Schedule of Quantity

Name of Work:- Restoration of Rain Damages on various road under Bangana Sub Division (

Estimated Cost: 499824.00
Earnest Money: 10000.00

SH:- Removal of Slips)


Time Limit: Two Month

Sr. No.	Description of work	No.or Qty.	Unit	RATE in Figures and words		AMOUNT Rs. P
				Figures	Words	
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1.5m and lead upto 1000m as per technical specification 302.3.5 and 1611. including carriage of materials within all leads and lifts and other incidentals. The rate are including of octroi, royalty, Malkhana, tool or other taxex imposed by the Government	4165.20	Per cubic metre	
Total in Figures						

Executive Engineer
Bangana Divn.H.P.P.W.D.
BANGANA

Schedule of Quantity


Name of Work:- Stock Storage of Various roads under Bangana Division (Providing and Supplying information board)							Estimated Cost: 435000.00	
							Earnest Money: 8700.00	
Sr. No.	Description of work	No.or Qty.	Unit	RATE in Figures and words		Two Month		
				Figures	Words			
1	Providing 900x600mm (Nine hundred into six hundred fifty millimetre) Informatory/Direction Board with as per specifications and drawing mild steel sheet of 2mm (Two millimetre) thick, duly welded with mild steel flat iron 32mmx5mm (Thirty two millimetre into five millimetre) size on edges. mild steel sheet tubes posts of size 48.3mm (Forty eight point three millimetre) outer dia and 3mm (Three millimetre) thick complete welded with mild steel sheet as per drawing. All sections of framed posts and mild steel tube will be primer painted including entire carriage of materials within all leads and as per drawings and technical specifications as per the direction of Engineer-in-Charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, sale tax, GST or other taxes imposed by the Government	30.00	Each			AMOUNT Rs. P		
2	Providing 600x450mm (Six hundred into four hundred fifty millimetre) Informatory/Direction Board with as per specifications and drawing mild steel sheet of 2mm (Two millimetre) thick, duly welded with mild steel flat iron 32mmx5mm (Thirty two millimetre into five millimetre) size on edges. mild steel sheet tubes posts of size 48.3mm (Forty eight point three millimetre) outer dia and 3mm (Three millimetre) thick complete welded with mild steel sheet as per drawing. All sections of framed posts and mild steel tube will be primer painted including entire carriage of materials within all leads and as per drawings and technical specifications as per the direction of Engineer-in-Charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, sale tax, GST or other taxes imposed by the Government	30.00	Each					
Total in Figures								


 Executive Engineer
 Bangana Division
 P.P.W.D. Bangana

Schedule of Quantity

Name of Work:- Stock Storage of Various roads under Bangana Division (Providing and Supplying information board)

Sr. No.	Description of work	No.or Qty.	Unit	Estimated Cost: 480000.00		Two Month
				Earnest Money: 9600.00	Time Limit:	
1	Providing 1200x900mm Informatory / Direction Board with per as specifications and drawing mild steel sheet of 2mm (Two millimetre) thick, duly welded with mild steel flat iron 32mmx5mm (Thirty two millimetre into five millimetre) size on edges. mild steel sheet tubes posts of size 48.3mm (Forty eight point three millimetre) outer dia and 3mm (Three millimetre) thick complete welded with mild steel sheet as per drawing. All sections of framed posts and mild steel tube will be primer painted including entire carriage of materials within all leads and lifts and as per drawings and technical specifications as per the direction of Engineer-in-Charge including all incidentals. The rates are inclusive of octroi, royalty, malkana, toll tax, sale tax, GST or other taxes imposed by the Government	60.00	Each			AMOUNT Rs. P
Total in Figures						


Executive Engineer
Bangana Division
P.P.W.D. Bangana


Schedule of Quantity

Name of Work:- Restoration of Rain Damages on Bangana Thathoon Tamlet road km. 0/000 to 3/400 (
C/O B/Wall at RD. 3/210 to 3/225)

Sr. No.	Description of work	No.or Qty.	Unit	RATE in Figures and words		AMOUNT
				Figures	Words	
1	Earth work in excavation for all type of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 and as per direction of the Engineer- in- Charge including setting out, construction of shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per direction of Engineer-in-Charge, including carriage of materials within all leads and lifts and other incidental . The rates are inclusive of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	13.39	Per Cubic metre			
2	Providing and laying mechanically mixed and vibrated plain cement concrete in foundation and plinth as per drawing and technical specification clause 800, & 1200 for nominal mix 1: 5: 10 (one cement: five sand : Ten graded crushed stone aggregate 40mm (forty millimeters) nominal size and curing complete including pumping or bailing out water, dewatering, removal of slush as required at site which may arise at the time of laying under water complete for all heights/depths and the cost of form work in retaining walls, breast walls etcetera as per the direction of Engineer-in-Charge. The rates are inclusive of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	36.07	Per Cubic metre			

Estimated Cost: ` 173000.00
 Earnest Money: ` 3500.00
 Time Limit: Two months

3	Providing weep holes in stone masonry, plain/ reinforced concrete abutment, wing walls, return walls, retaining walls with 100mm (one hundred millimeter) diameters, PVC pipe extending through the full width of the structures with a slope of 1 (one) vertical : 20 (twenty horizontal) toward drawing face complete as per direction of Engineer – in- Charge including carriage of materials within all leads and lifts and other incidental . The rates are inclusive of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	15.00	each					
Total in Figures								


 Executive Engineer
 Bangana Divn.H.P.P.W
 BHANGANA


Draft Schedule of Quantity

Name of Work:- C/O Link road to Harizen Basti Padyola km. 0/000 to 2/000 (SH:- P/L Stone Soling & C.C. Pavement and Edge Wall in km. 1/640 to 1/696) Under SCDP)

Estimated Cost: 492051.00
 Earnest Money: 9900.00
 Time Limit: Two mon

Sr. No.	Description of work	No. or Qty.	Unit	RATE in Figures and words		AMOUNT Rs.
				Figures	Words	
1	Earth work in excavation for all type of road structure such as retaining walls, breast walls, culverts, drains and parapets etcetra in all type of classification of soil comprising of ordinary soil, ordinary rock, hard rock chiseling /wedging out rocks (Where blasting is prohibited) as per drawings and M.O.R.D. technical specification clause 305.1 and as per direction of the Engineer-in-Charge including setting out, construction of shoring and bracing , removal of stumps and other deleterious materials and disposal of materials upto any lead and upto any lift including dressing of sides and bottom and back filling in trenches with excavated suitable approved material to the original surface in layers not exceeding 150mm (one hundred fifty millimetre) compacted thickness including shoring and strutting and pumping and bailing out water (surface and sub soil water) upto any depth and any quantum of water including cleaning of slush which may arise out during dewatering as per direction of Engineer-in-Charge, including carriage of materials within all leads and lifts and other incidental . The rates are inclusive of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	67.48	Per Cubic metre			
2	Stone soling properly hand-packed filling interstices with Kharanja stone and consolidating with power road roller to the requested gradient and comber including spreading watering and rolling of binding materials moorum or earth etc. complete as per HP.PWD specification. 100 mm spread thickness (finished work including materials and labour) as per direction of Engineer-in-Charge, including carriage of materials within all leads and lifts and other incidental . The rates are inclusive of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	23.45	Per Cubic metre			

3	Providing and laying cement concrete work 1:3:6 (one cement: three sand:six graded stone aggregate) 40mm (forty millimetre) nominal size in open foundation mechanically mixed and vibrated including curing complete, including pumping or bailing out water, dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work as per drawings and M.O.R.D. technical specification Clause 802.803,1202 and 1203 as per the direction of the Engineer-in-Charge, including carriage of material within all leads and lifts and other incidental . The rates are inclusive of octroi, royalty, Malkana, toll tax, sale tax or other taxes imposed by the Government.	40.32	Per Cubic metre			
4	Providing and laying mechanically mixed and vibrated concrete for plain/ reinforced concrete in open foundation/ for all type structure complete of plain cement concrete nominal mix 1:4:8 (One cement :four sand:eight graded crushed /broken stone aggregate 20mm (twenty Millimeter) nominal size in or under water and curing complete including pumping or bailing out water,dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work as per drawings and MORD technical specification Clause 802.803.1202 and 1203 as per the direction of the Engineer-in- charge including carriage of material with in all leads and lifts and other incidentals . The rate includes octroi, royalty,malkhana ,toll tax,GST,labour cess or other taxes imposed by the Government.	18.76	Per Cubic metre			
5	Providing and laying mechanically mixed and vibrated concrete for plain/ reinforced concrete in open foundations upto all heights for all type structure complete of plain with cement concrete design mix of grade M-20 (M-twenty) cement contents not less than 350kg,(three hundred fifty kilogram) per cubic metre in or under water and curing complete including pumping or bailing out water,dewatering removal of slush as required at site which may arise at the time of laying under water complete for all heights/ depths including the cost of form work as per drawings and technical specification Clause 802.803,1202 and 1203 as per the direction of the Engineer-in-charge including carriage of material with in all leads and lifts and other incidentals .The rate includes octroi, royalty,malkhana ,toll tax,GST,labour cess or other taxes imposed by the Government..	17.92	Per Cubic metre			
Total in Figures						



Executive Engineer
Rangana Divn.H.P.P.W.C.
PANGANA