

HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT

No:-PW-NCD-E-Tender-NIT/2023:- 14836-41

Dated:- 2-3-2024-

To

The Executive Engineer (IT Cell),
Nirman Bhawan, Nigam Vihar, Shimla-2

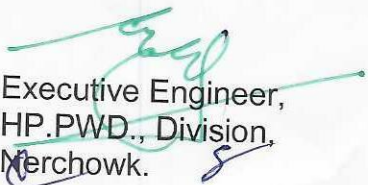
Subject: -

Publishing of tender Notice.

Dear Sir,

Enclosed please find herewith the tender Notice of works as given in the Notice Inviting Tender for uploading on Department website as per Notification No. Principal Secretary (PW), to the Govt. of H.P. letter No.PBW(B) A(3)1/2020 dated Shimla-2 the 16th July, 2021 as the works mentioned in the tender notice are urgent in nature and in public interest.

DA: - Notice Inviting Tender.
(03 Nos. Works)


Executive Engineer,
HP.PWD., Division,
Nerchowk.

Copy forwarded to for information:-

Copy forwarded to the Superintending Engineer, 1st Circle, HP.PWD.,
Mandi for information please.

Copy to all the Assistant Engineers, working under this Division.

Copy to Account Branch in this office.

Copy to Drawing Branch in this office.

Notice Board.

Executive Engineer,
HP.PWD., Division,
Nerchowk.

HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT

"NOTICE INVITING TENDER"

Sealed **Percentage rate** tender's on form **"6&8"** are invited by the Executive Engineer, Nerchowk, H.P.PWD. Nerchowk for the following works from the approved and eligible contractors enlisted in H.P.PWD. so as to reach in this office on or before **14.03.2024 upto 01.30 P.M.** and will be opened on the same day at **3.00 P.M.** in the presence of interesting contractors or their authorized representatives who may like to be present. If it happen to be holiday on the tender will be open on next working day. The application for obtaining the tender form will be received up to **11:00 AM on 14.03.2024** and tender form will be issued on dated **14.03.2024 upto 12:30 PM.** The EMD should be attached during the submission of application for obtaining the tender form. The application will not be accepted without Earnest Money & Cost of tender form.


The earnest money in the shape of FDR National Saving Certificate/Time deposit accounts/Saving account in any of the Post Office and Banks of Himachal Pradesh duly pledged in favour of the Executive Engineer must accompany with each tender. The conditional tender's and the tender's received without earnest money will summarily be rejected. The earnest money should be attached with application. The offer of the tender shall be kept open for **90 days**. The Executive Engineer reserves the right to reject the tender's without assigning any reason:-

| Sr. No | Name of work | Estimated Cost (Rs.) | Earnest Money (Rs.) | Cost of Tender From (Rs.) | Time limit | Eligible Class of Contractor |
|--------|---|----------------------|---------------------|---------------------------|------------|------------------------------|
| 1 | Maintenance on Chandigarh Mandi Manali (Old NH-21) road km 184/600 to 198/050. (SH:- Construction of Retaining wall at RD 196/741.25 to 196/747.50). | 433655 | 8700 | 350 | Two Months | "D" |
| 2 | Routine day to day Repair & Maintenance of Non-Residential Buildings of SLBSGM & H at Nerchowk. (SH:- Supply and stacking Accessories items for Repair and Maintenance work). | 203224 | 4100 | 350 | One Month | "D" |
| 3 | Maintenance on Chandigarh Mandi Manali (Old NH-21) road km 184/600 to 198/050. (SH:- Construction of Retaining wall at RD 196/735 to 196/741.25). | 444529 | 8900 | 350 | Two Months | "D" |

It is certified that the above tenders are very **"urgent nature"**, so may be uploaded on department website in public interest.

Note:- The Constructors/Firms should possess the following documents (Photo copy to be attached).

1. The Contractor/Firm should be enlisted with the HP.PWD. & Registration/Renewal copy attached.
2. The tender forms will not be issued to those contractors whose performance is not found satisfactory.
3. The list of similar type of work executed and work done performance certificate issued by the concerned Executive Engineer required to be produced by the contractor along with application.
4. **Only two tenders shall be issued to each contractor.**
5. The contractor will not have more than two works in hand at the time of tender and only up to completion of work satisfactory including adherence to quality parameters further work will be awarded to him. All under taking/affidavit alongwith application that he is not having more than two works in hand in HP.PWD for execution failing which the application for issuing the tender forms shall not be accepted.
6. The contractor/firm shall be issued tenders on the production of valid GST/income tax clearance certificate.
7. As per Govt. Notification No.PBW (B)A(3)1/2020-I dated 07.10.2021, in case the tendered amount of the lowest bidder comes more than 5% in 1st call the negotiation can be conducted with him but the negotiated amount should remain within 5% of the amount put to tender (on market rate) and vide Govt notification No.PBW (B)A(3)1/2020-I dated 10.05.2023 tendered amount below 30% of the estimated cost will be accepted.


Executive Engineer,
HP.PWD. Division,
Nerchowk.

DNIPS.NO/ 540

2

DRAFT SCHEDULE OF QUANTITY

Name of work:- Maintenance on Chandigarh Mandi Manali (Old NH-21) road km. 184/600 to 198/050. (SH:- Construction of Retaining wall at RD. 196/741.25 to 196/747.50)

Estimated Cost:- 433655.00

Earnest Money :- 8700.00

Time :- Two Months

| S.No | Description of item | Quantity | Rate with all taxes including GST in | | Unit | Amount |
|------|---|----------|--------------------------------------|---|-----------------|------------------|
| | | | Rs. | P. | | |
| | | | In figure | In word | | |
| 1 | Earth work in excavation for structure as per drawing and technical specification clause 305.1 including setting out construction of shoring and bracing removal of stumps and other deleterious material and disposal up to any lead dressing of sides and bottom and back filling in trenches with excavated suitable material including carriage of material with in all leads and lifts and other incidentals and as per the direction of the Engineer-in Charge. | 29.47 | 287.00 | Rupees Two hundred eighty seven and paise zero only. | Per Cubic Metre | 8458.00 |
| 2 | Providing and laying plain/reinforced cement concrete in substructure as per drawing and technical specification clause 802,803,1202 and 1203 P.C.C nominal mix 1:3:6 (One cement: three sand:six graded stone aggregate) including carriage of material with in all leads and lifts and as per the entire satisfaction and direction of Engineer-in-Charge. | 86.56 | 4770.00 | Rupees Four thousand seven hundred seventy and paise zero only. | Per Cubic Metre | 412891.00 |
| 3 | Back filling behind abutment wing wall and retaining wall complete as per drawing & technical specification clause 1204.3.8 and including carriage of material with in all leads and lifts and other incidentals and as per the direction of the Engineer-in Charge. | 8.44 | 1050.00 | Rupees One thousand fifty and paise zero only. | Per Cubic Metre | 8862.00 |
| 4 | Providing weep hole in brick masonry/ stone masonry / plain reinforced concrete abutment, wing wall, return wall with 100mm dia.(one hundred millimetre diameter) PVC pipe extending through the full width of the structures with slope of 1V:20H (one vertical isto twenty horizontal) towards drawing face complete as per drawing and technical specifications clauses 614,709,1204.3.7 including carriage of material and other incidentals as per the direction of the Engineer-in Charge | 12.00 | 287.00 | Rupees Two hundred eighty seven and paise zero only. | Each | 3444.00 |
| | | | | | Total | 433655.00 |

Draft schedule of quantity approved for 24,33,655/-


 Executive Engineer,
 HPPWD Division,
 HPPWD Nerchowk

Draft Schedule of quantity

Name of work- Routine day to day Repair & maintenance of Non-Residential Buildings of SLBSGMC & H at Nerchowk. (SH:Supply and Stacking Accessories Items for Repair and Maintenance Work.)

Estimated Amount -203224.00/-
Earnest money - 4100.00/-
Time - One month

| S. No. | Item Description | Quantity | Rate | | Units | Total amount with all taxes Including GST in Rs. P. |
|--------|---|----------|-----------|---|-------|---|
| | | | In figure | In word | | |
| 1 | Supplying and Stacking Gloss Enamel Paint BLACK 4 LTR of Approved Brand and Quality, at site of work with in all leads, lifts and carriage of Materials and as per direction of Engineer-in-charge. | 14.00 | 1550.00 | Rupees One Thousand Five Hundred Fifty Only | No. | 21700.00 |
| 2 | Supplying and Stacking Gloss Enamel Paint WHITE 20 LTR of Approved Brand and Quality, at site of work with in all leads, lifts and carriage of Materials and as per direction of Engineer-in-charge. | 3.00 | 7725.00 | Rupees Seven Thousand Seven Hundred TwentyFive Only | No. | 23175.00 |
| 3 | Supplying and Stacking of Mineral Oil (Turpentine) of Approved Brand and Quality, at site of work with in all leads, lifts and carriage of Materials and as per direction of Engineer-in-charge. | 30.00 | 120.00 | Rupees One Hundred Twenty Only | Ltr | 3600.00 |
| 4 | Supplying and Stacking of Paint Brush 4" of Approved Brand and Quality, at site of work with in all leads, lifts and carriage of Materials and as per direction of Engineer-in-charge. | 4.00 | 100.00 | Rupees One Hundred Only | No. | 400.00 |
| 5 | Supply and Stacking of Nylon Sleeves of Sizes 2" (16/Pkt) white Finish of approved quality and Carriage of Material. | 20.00 | 20.00 | Rupees Twenty Only | pkt | 400.00 |
| 6 | Supplying and Stacking of Gloss Enamel Paint Bush green 4 LTR of Approved Brand and Quality, at site of work with in all leads, lifts and carriage of Materials and as per direction of Engineer-in-charge. | 4.00 | 1607.00 | Rupees One Thousand Six Hundred Seven Only | No. | 6428.00 |
| 7 | Supplying and stacking of Vitrified Double Charged Floor Tile 600*600 of Approved Brand and Quality, at site of work with in all leads, lifts and carriage of Materials and as per direction of Engineer-in-charge. | 72.00 | 640.00 | Rupees Six Hundred Forty Only | Sqm | 46080.00 |
| 8 | Supplying and stacking of Composite polymer fitting, Female Elbo 1620*1/2" of Approved Brand and Quality, at site of work with in all leads, lifts and carriage of Materials and as per direction of Engineer-in-charge. | 30.00 | 175.00 | Rupees One Hundred SeventyFive Only | No. | 5250.00 |
| 9 | Supply and Stacking of TATA BLUESCOPE STEEL Durashine tile Color Coated Plain Ridge 0.47*600 mm width, at site of work with in all leads, lifts and carriage of Materials and as per direction of Engineer-in-charge. | 12.00 | 269.00 | Rupees Two Hundred SixtyNine Only | meter | 3228.00 |
| 10 | Supply and Stacking of TATA BLUESCOPE STEEL Durashine roof Color Coated plain sheet of 0.47 mm of 10' at site of work with in all leads, lifts and carriage of Materials and as per direction of Engineer-in-charge. | 14.00 | 2040.00 | Rupees Two Thousand Fourty Only | No. | 28560.00 |
| 11 | Supplying and stacking at site graded crushed stone aggregate 20 mm (twenty millimetre) nominal size free from dirt, dust disintegrated pieces, deleterious and organic matter in proper stacks at site of work and as directed by the Engineer-in-Charge including loading at crusher site and unloading at site of work, carriage of materials within all leads and lifts complete in all respect. The deduction of voids will be made as per PWD specifications. | 4.00 | 1850.00 | Rupees One Thousand Eight Hundred Fifty Only | cum | 7400.00 |

| | | | | | | |
|--------------|--|-------|---------|--|-------|------------------|
| 12 | Supplying and stacking at site graded crushed stone aggregate 10 mm (ten millimetre) nominal size free from dirt, dust disintegrated pieces, deletrious and organic matter in proper stacks at site of work and as directed by the Engineer-in-Chartge including loading at crusher site and unloading at site of work, carriage of materials within all leads and lifts complete in all respect. The deduction of voids will be made as per PWD specifications. | 4.00 | 1850.00 | Rupees One Thousand Eight Hundred Fifty Only | cum | 7400.00 |
| 13 | Supplying and stacking at site clean coarse sharp sand free from dirt, dust disintegrated pieces, deletrious and organic matter in proper stacks at site of work and as directed by the Engineer-in-Chartge including loading at crusher site and unloading at site of work, carriage of materials within all leads and lifts complete in all respect. | 8.00 | 1800.00 | Rupees One Thousand Eight Hundred Only | cum | 14400.00 |
| 14 | Supply and Stacking of PVC Piping System of Pipe 160 mm 6kg/m2 (vectus)of approved quality , at site of work with in all leads,lifts and carriage of Materials and as per direction of Engineer-in-charge. | 6.00 | 1182.17 | Rupees One Thousand One Hundred EightyTwo and Paise Seventeen Only | meter | 7093.00 |
| 15 | Supply and Stacking of PVC Piping System of elbow 160 mm 6kg/m2 (vectus)of approved quality , at site of work with in all leads,lifts and carriage of Materials and as per direction of Engineer-in-charge. | 6.00 | 515.00 | Rupees Five Hundred Fifteen Only | No. | 3090.00 |
| 16 | Supply and Stacking of PVC Piping System of Tee 160 mm 6kg/m2 (vectus)of approved quality , at site of work with in all leads,lifts and carriage of Materials and as per direction of Engineer-in-charge. | 6.00 | 740.00 | Rupees Seven Hundred Fourty Only | No. | 4440.00 |
| 17 | Supply and Stacking of PVC Piping System of Coupler Fabricated 160 mm 4kg/m2 (vectus)of approved quality , at site of work with in all leads,lifts and carriage of Materials and as per direction of Engineer-in-charge. | 6.00 | 295.00 | Rupees Two Hundred NinetyFive Only | No | 1770.00 |
| 18 | Supplying and stacking of Composite polymer fitting, Threaded End Plug 1/2" of Approved Brand and Quality, at site of work with in all leads,lifts and carriage of Materials and as per direction of Engineer-in-charge. | 30.00 | 6.00 | Rupees Six Only | No. | 180.00 |
| 19 | Supplying and stacking of Jal 1535 J bib tap Long Body Without Flange 15mm of Approved Quality, at site of work with in all leads,lifts and carriage of Materials and as per direction of Engineer-in-charge. | 5.00 | 1030.00 | Rupees One Thousand Thirty Only | No. | 5150.00 |
| 20 | Supplying and stacking of Jal 1523 J Pillar Tap with Foam Flow 15mm of Approved Quality, at site of work with in all leads,lifts and carriage of Materials and as per direction of Engineer-in-charge. | 10.00 | 1348.00 | Rupees One Thousand Three Hundred FourtyEight Only | No. | 13480.00 |
| TOTAL | | | | | | 203224.00 |

Draft Schedule of quantity approved for 203224.00/-


 Executive Engineer
 Nerchowk Division
 HPPWD Nerchowk

DM/S.No:- (538)

①

DRAFT SCHEDULE OF QUANTITY

Name of work:- Maintenance on Chandigarh Mandi Manali (Old NH-21) road km. 184/600 to 198/050. (SH:- Construction of Retaining wall at RD. 196/735 to 196/741.25)

Estimated Cost:- 444529.00

Earnest Money :- 8900.00

Time :- Two Months

| S.No | Description of item | Quantity | Rate with all taxes including GST in | | Unit | Amount |
|------|---|----------|--------------------------------------|---|-----------------|------------------|
| | | | Rs. P. | | | |
| | | | In figure | In word | | |
| 1 | Earth work in excavation for structure as per drawing and technical specification clause 305.1 including setting out construction of shoring and bracing removal of stumps and other deleterious material and disposal up to any lead dressing of sides and bottom and back filling in trenches with excavated suitable material including carriage of material with in all leads and lifts and other incidentals and as per the direction of the Engineer-in Charge. | 29.47 | 287.00 | Rupees Two hundred eighty seven and paise zero only. | Per Cubic Metre | 8458.00 |
| 2 | Providing and laying plain/reinforced cement concrete in substructure as per drawing and technical specification clause 802,803,1202 and 1203 P.C.C nominal mix 1:3:6 (One cement: three sand:six graded stone aggregate) including carriage of material with in all leads and lifts and as per the entire satisfaction and direction of Engineer-in-Charge. | 88.96 | 4770.00 | Rupees Four thousand seven hundred seventy and paise zero only. | Per Cubic Metre | 424339.00 |
| 3 | Back filling behind abutment wing wall and retaining wall complete as per drawing & technical specification clause 1204.3.8 and including carriage of material with in all leads and lifts and other incidentals and as per the direction of the Engineer-in Charge. | 8.44 | 1050.00 | Rupees One thousand fifty and paise zero only. | Per Cubic Metre | 8862.00 |
| 4 | Providing weep hole in brick masonry/ stone masonry / plain reinforced concrete abutment, wing wall, return wall with 100mm dia.(one hundred millimetre diameter) PVC pipe extending through the full width of the structures with slope of 1V:20H (one vertical ist to twenty horizontal) towards drawing face complete as per drawing and technical specifications clauses 614,709,1204.3.7 including carriage of material and other incidentals as per the direction of the Engineer-in Charge | 10.00 | 287.00 | Rupees Two hundred eighty seven and paise zero only. | Each | 2870.00 |
| | | | | | Total | 444529.00 |

Draft schedule of quantity approved for 4,44,529/-

[Signature]
 Executive Engineer,
 HPPWD Division,
 HPPWD Nerchowk