



O/o the Executive Engineer, Karchham Division, HP.PWD., Bhabanagar.

Web: www.hppwd.gov.in, Email: ee-karc-hp@nic.in

Phone No.-01786-292897

No. PW/BHNR-B&R-EA-I-Tender/2024-25

4955

Dated:- 11-9-2024

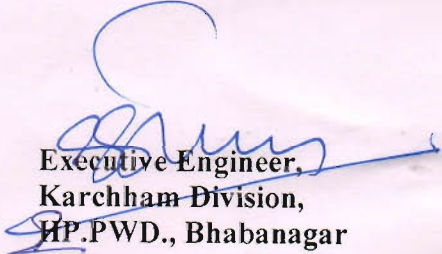
To

The Executive Engineer, (IT)
Nigam Vihar Shimla-2.

Subject: - Publication of tender notice

Enclosed, please find herewith copy of tender notice in respect of tenders invited vide this office NIT No. PW/BHNR-B&R-EA-I-Tender/2024-25-4945-55 dated 01/09/2024 for uploading the same on department website for wide publicity.

DA:- Copy of NIT


Executive Engineer,
Karchham Division,
HP.PWD., Bhabanagar

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDER**

Sealed item rate tender(s) on PWD form No.6 &8 are hereby invited by the Executive Engineer, Karchham Division, HP.PWD, Bhabanagar Distt. Kinnaur (H.P) on behalf of the Governor of H.P for the following works from the registered contractors in HP.PWD in appropriate class to reach in this office on **19.09.2024** up to 10.30 A.M. and will be opened on the same day at 11.00A.M. in the presence of Contractors or their authorized representative who wish to be present at that time. The application for obtaining the tender form will be received on **18.09.2024** i.e. 11.00 AM to 1.00 PM and the tender form can be had from this office against this cash payment (Non- refundable) on the same day from 2.00P.M. to 5.00 P.M. No application shall be entertained without earnest money or through FAX.


Earnest money shall be in shape of NSC/FDR duly pledged in favour of Executive Engineer, Karchham Division, HP.PWD, Bhabanagar Distt. Kinnaur H.P. Ambiguous /Telegraphically/conditional tenders or tender through FAX shall not be entertained/ considered in any case.

Sr. No.	Name of Work	Estimated Cost	Earnest Money	Time	Form No.	Cost of form
1	Improvement of black spot on link road from Chaura to Chhota Kamba Km 0/00 to 16/00 (SH:- Providing and fixing "W" metal beam *crash barrier railing at RD 8/600 to 8/700) under TASP	482088/-	9700/-	Three months	6&8	350/-
2	Improvement of black spot on link road from Chaura to Chhota Kamba Km 0/00 to 16/00 (SH:- Providing and fixing "W" metal beam crash barrier railing at RD 7/200 to 7/300) under TASP	482088/-	9700/-	Three months	6&8	350/-
3	R/R damages on Chaura to Chhota Kamba road Km 0/00 to 16/00 (SH:- Hiring of hydraulic excavator (L&T 140) in working condition for removal of landslides/slips/debris B/W at RD 8/00 to 9/00).	495000/-	10000/-	One month	6&8	350/-
4	R/R damages on Chaura to Chhota Kamba road Km 0/00 to 16/00 (SH:- Hiring of hydraulic excavator (L&T 140) in working condition for removal of landslides/slips/debris B/W at RD 9/00 to 10/00).	495000/-	10000/-	One month	6&8	350/-
5	R/M of cable way span from Rawa to Vikasnagar Block Nichar District Kinnaur (HP) tightening of 12mm and 8mm dia wire rope and providing and fixing upper wheel)	368401/-	7400/-	15 Days	6&8	350/-

SPECIAL CONDITIONS

- The material shall be arranged by the contractor himself.
- The detail of documents to be attached with the application is given below.
 - Latest copy of renewal enlistment.
 - Copy of Pan Card.
 - Copy of GST No.
- The offer of the tender shall be kept open for 90 days
- Tender received after the specified time/date shall not be opened.
- Executive Engineer, Karchham Division, HP.PWD, Bhabanagar Distt. Kinnaur H.P. reserves the right to reject any or all tender/s without assigning any reasons.


6. If due to any unforeseen reasons the office of the Executive Engineer, Karchham Division, HP.PWD, Bhabanagar Distt. Kinnaur remain closed on the notified date of sale and receipt of tender, tender will be sold and received/opened the next working day of same specified time.
7. Tenderers may contact the Executive Engineer for any further information they may require during the working day/ office hours.
8. The contractors are requested to insert the rate of each in words as well as in figures failing which Executive Engineer reserves the right to reject any or all tenders.
9. The labourcess shall allow/ deduction @ 2% TDS amount of GST (1% CGST and 1% SGST).
10. The labour cess @ 1% will be deducted from the gross amount of the bill
11. All the works are of urgent nature hence the contractor already having two works are not eligible to participate for the tendering.
12. A contractors enlisted in a particular class shall be eligible to tender for his own class and one step below as per Govt. notification.
13. The Contractor will have to submit the proof of registration under Employees Provident Funds & Miscellaneous Provision Act.1952 before award of work.
14. Cement should be purchased from H.P. State Civil Supply Corporation.
15. GST will be deducted from each bill as per latest instruction of the Government.


Executive Engineer,
Karchham Division,
HP.PWD Bhabanagar.

No.PW/BHNR/B&R/EA-I-Tender Notice/2024-25- 4945-55
Copy forwarded for information to the:-

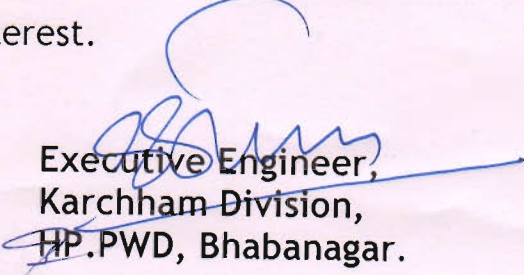
Dated:- 11-9-24

1. Engineer-in-Chief, HP.PWD, Shimla
2. Chief Engineer (SZ) HP.PWD, Shimla-1
3. Superintending Engineer, 11th Circle, HP.PWD, Rampur
4. All the Assistant Engineer working under this division
5. A/B & D/B in this office.
6. Notice board of this office.


Executive Engineer,
Karchham Division,
HP.PWD Bhabanagar.

Certificate

Certified that the tenders of the works invited vide this office NIT No.PW/BHNR/B&R/EA-I-Tender Notice/2024-25-4945-55 Dated:- is of urgent nature in exigency of public interest.


Executive Engineer,
Karchham Division,
HP.PWD, Bhabanagar.

Draft Schedule of Quantity

Estimated Cost:-

482088.00

Earnest Money:-

9700.00

Time:-

Three Months

Name of work:- Improvement of blackspot onlink road from Chaura to Chhota Kamba Km 0/00 to 16/00

Sub Head:- Providing and fixing "W" metal beam crash barrier railing at R.D 8/600 to 8/700 Under TASP

Sr. No.	Description of item	Qty.	Rate		Unit	Amount
			In Figure	In Words		
1	Earth work in excavation for structures as per drawing and technical specifications clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious materials and disposal upto any lead, dressing of sides and bottoms and back filling in trenches with excavated suitable materials complete within all leads, lifts carriage of material and other incidentals.	8.24	300.00	Rupees three hundred and zero paise only	Per cubic metre	2472.00
2	Providing and erecting a "W" Metal Beam Crash Barrier comprising of 3mm thick corrugated sheet metal beam guard rail 70cm. Above road/ ground level fixed on ISMC series channel vertical posts 150x75x5mm thick spaced 1.50 metre centre to centre 1.80 metre high 1.10 metre below ground/ road level all steel parts and fittings to be galvanised by hot deep process, all fittings to confirm to IS: 1364, metal beam guard rail to be fixed on the vertical posts with a spacer of channel section 150x75x5mm, 330mm long complete as per clause 810 within all leads and lifts carriage of material and other incidentals and as per the direction of Engineer in charge	110.00	3965.35	Rupees thousand three hundred sixty five paise only	Per Running metre	436189.00
3	Providing and laying concrete for plain/reinforced cement concrete 1:4:8 (One cement isto four sand isto eight graded stone aggregate 25mm (twenty five millimetre) nominal size) in open foundation and curing complete including cost of form work in retaining walls/breast walls, as per HPPWD specification clause 802, 803, 1202 & 1203 within all leads and lifts and as per the direction of Engineer-in-charge	8.24	5270.25	Rupees five thousand two hundred seventy and twenty five paise only	Per cubic metre	43427.00
					Total	482088.00

Draft schedule of quantity approved for Rs 482088/-

Executive Engineer,
Karchham Division, HPPWD.,
Karchham, Bhaba Nagar.

Draft Schedule of Quantity

Estimated Cost:-

482088.00

Earnest Money:-

9700.00

Time:-

Three Months

Name of work:- Improvement of blackspot on link road from Chaura to Chota Kamba Km 0/00 to 16/00
Sub Head:- Providing and fixing "W" metal beam crash barrier railing at R.D 7/200 to 7/300 Under TASP

Sr. No.	Description of item	Qty.	Rate		Unit	Amount
			In Figure	In Words		
1	Earth work in excavation for structures as per drawing and technical specifications clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious materials and disposal upto any lead, dressing of sides and bottoms and back filling in trenches with excavated suitable materials complete within all leads, lifts carriage of material and other incidentals.	8.24	300.00	Rupees three hundred and zero paise only	Per cubic metre	2472.00
2	Providing and erecting a "W" Metal Beam Crash Barrier comprising of 3mm thick corrugated sheet metal beam guard rail 70cm. Above road/ ground level fixed on ISMC series channel vertical posts 150x75x5mm thick spaced 1.50 metre centre to centre 1.80 metre high 1.10 metre below ground/ road level all steel parts and fittings to be galvanised by hot deep process, all fittings to confirm to IS: 1364, metal beam guard rail to be fixed on the vertical posts with a spacer of channel section 150x75x5mm, 330mm long complete as per clause 810 within all leads and lifts carriage of material and other incidentals and as per the direction of Engineer in charge.	110.00	3965.35	Rupees thousand hundred sixty and thirty five paise only	Per Running metre	436189.00
3	Providing and laying concrete for plain/reinforced cement concrete 1:4:8 (One cement isto four sand isto eight graded stone aggregate 25mm. (twenty five millimetre) nominal size) in open foundation and curing complete including cost of form work in retaining walls/breast walls, as per HPPWD specification clause 802, 803, 1202 & 1203 within all leads and lifts and as per the direction of Engineer-in-charge.	8.24	5270.25	Rupees five thousand two hundred seventy and twenty five paise only	Per cubic metre	43427.00
					Total	482088.00

Draft schedule of quantity approved for Rs 482088

Executive Engineer,
Karcham Division, HPPWD.,
Kerichanai Bhaba Nagar.

Draft Schedule Of Quantity

Estimated Cost :- 495000.00

Earnest Money:- 10000/-

Time:- 30 Days

Name Of work :- R/R damages on Chaura to Chhota Kamba road Km 0/00 to 16/00.

Sub Head :- Hiring of hydraulic excavator (L & T 140) in working condition for remove of land slids/ slips/ debris BMW at RD. 8/00 to 9/00

S.No	Description Of Items	Qty.	Rate		Unit	Amount
			In figer	In Words		
1	Hiring of one No. Hydraulic excavator (L & T 140) in working condition Hyundai /L&T make (excavation bucket with 360 digree rotation) on hire charges basis of the site of work for removal of slips, land slids and debris in all classification of soil dressing of berms, filling of depression and filling behind R/ wall etc. and their loading with free of cost i/c brocken for breaking lough boulder including P.O.L., opration staff , repair charges of machinary etc. The actual working hour shall be counted for payment. Any damages to the private / public property during the excavation shall be the absolutely responsibility of the owner. The work shall be excuted as per the entire satisfaction and direction of Engineer-in chargewith in all leads lifts complete in all respect.	110.00	4500.00	Rupess four thousand five hundred and zero. paise only	Per hours	495000.00
Total						495000.00

Draft Schedule of quantity approved for Rs. 495000/- only

Executive Engineer
Karchham Division
HPPWD at Bhabanagar

Draft Schedule Of Quantity

Estimated Cost :- 495000.00

Earnest Money:- 10000/-

Time:- 30 Days

Name Of work:- R/R damages on Chaura to Chhota Kamba road Km 0/00 to 16/00.

Sub Head:- Hiring of hydraulic excavator (L & T 140) in working condition for remove of land slides/ slips/ debris B/W at RD. 9/00 to 10/00

S.No	Description Of Items	Qty.	Rate		Unit	Amount
			In figer	In Words		
1	Hiring of one No. Hydraulic excavator (L & T 140) in working condition Hyundai / L & T make (excavation bucket with 360 digree rotation) on hire charges basis of the site of work for removal of slips, land slides and debris in all classification of soil dressing of berms, filling of depression and filling behind R/ wall etc. and their loading with free of cost i/c broken for breaking boulder including P.O.L. operation staff, repair charges of machinery etc. The actual working hour shall be counted for payment. Any damages to the private / public property during the excavation shall be the absolutely responsibility of the owner. The work shall be excuted as per the entire satisfaction and direction of Engineer-in charge with in all leads lifts complete in all respect.	110.00	4500.00	Rupees four thousand five hundred and zero paise only	Per hours	495000.00
Total						495000.00

Draft schedule of quantity approved for Rs 495000 only

Executive Engineer
Karchham Division
HPPWD at Bhabanagar

Draft Schedule of Quantity

Name of work:- R/M of cable way span from Rawa to Vikasnagar Block Nichar Distt, kinnaur (H.P.)
Tightening of 12 mm and 8 mm dia wire rope and providing and fixing Upper wheel)..

Estimated Cost:- 368401/-
Earnest Money:- 7400/-
Time Limit:- 15 Days
(SH:-

Sr. No.	Description of Work / Item(s)	Qty	Rate		Amount
			in finger	In words	
1	Tightening of steel wire rope 12mm(twelve millimeters) (Track Rope) ,including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the	4450.00	46.00	Rupees fourty six and zero paise only	Per running metre 204700.00
2	Tightening of steel wire rope 8mm(eight millimeters) ,including carriage of materials through all modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge.	2225.00	31.00	Rupees othirty one and zero paise only	Per running metre 68975.00
3	Providing and fixing Upper wheel Axel ,including carriage of materials through all-modes of transportation with in all leads and lifts, as per PWD specifications and as per direction of the Engineer-in-charge.	2.00	47363.00	Rupees four seven thousand three hundred sixty threeand zero paise only	Each 94726.00
Total:-					368401.00

Draft schedule of quantity approved for ₹ 368401/-

[Signature]
Executive Engineer
Karchham Division (B&R).
HP, PWD Bhabanagar.