

Himachal Pradesh
Public Works Department

No. PW-KD-CTR- Tender-NIT/2026-2027-

10850-51

Dated:-

11/7/28

To


The Executive Engineer (IT Cell)
Nigam Vihar Shimla.

Subject :- Publication of Tender Notice.

Jai Hind

Enclosed please find herewith the tender Notice of work as given in the Notice Inviting tender for uploading on department website as per notification Pr. Secy. (PW) to the Govt. of Himachal Pradesh letter No. PBW (B)A(3)1/2024 dated Shimla-2 the 03-01-2024 and PWD-B-A0(3)/8/2025- 300858 dated 09-10-2025 as the works mentioned in the tender notice are urgent in nature and in public interest.

DA:- Notice Inviting Tender & Schedule of Quantity and Certificate.


Executive Engineer,
HPPWD., Division Kasumpti
Shimla.

Copy forwarded to for further necessary action please.

1. The Superintending Engineer 4th Circle HPPWD Shimla .


Executive Engineer,
HPPWD., Division Kasumpti
Shimla.

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDERS**

Executive Engineer B&R Division Kasumpti HPPWD Shimla for the following works on behalf of the Government of Himachal Pradesh from the eligible contractors enlisted in HPPWD, so as to reach in the office as per time schedule given below:-

- | | |
|--|-----------------------------------|
| 1. Date of receipt of application for tender forms:- | 09-07-2026 10:00 AM upto 12:00 PM |
| 2. Dated of Issue /sale of tender forms:- | 09-07-2026 12:00 PM upto 4:00 PM |
| 3. Date of receipt of tender:- | 10-07-2026 .up to 10:30 AM |
| 4. Date of opening of tender:- | 10-07-2026 up to 11:00 AM |

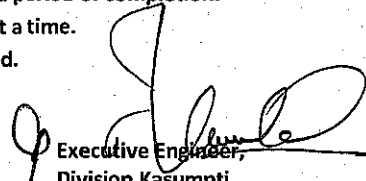
Sr. No.	Name of Work	Estimated cost	EMD(Rs .)	Cost of Tender (Rs.)	Time Limit	Eligible class of Contractor
1	A/R & M/O on Various roads Janedghat Section Under Junga Sub-Division (SH:- Supplying and Stacking Post seal bags sold mix in various Rds).	99120/-	2000/-	350/-	30 days	Class-D
2	A/R & M/O on various roads Mehli Section under Sub-Division Kasumpti (SH:- Supplying and stacking Post seal bags cold mix in various Rds).	99750/-	2000/-	350/-	30 days	Class-D
3	A/R & M/O on various roads PariMahal Section under Sub-Division Kasumpti (SH:- Supplying and Stacking post seal bags cold mix in various Rds).	99750/-	2000/-	350/-	30 days	Class-D
4	A/R & M/O on various roads AIMSS Section under Sub-Division No.1 (SH:- Supplying and Stacking post seal bags cold mix in various Rds).	99225/-	2000/-	350/-	30 days	Class-D
5	A/R & M/O on various roads Dhalli Section under Sub-Division No.1 (SH:- Supplying and Stacking post seal bags cold mix in various Rds).	99700/-	2000/-	350/-	30 days	Class-D
6	A/R & M/O on various roads Beolia Section under Sub-Division Junga (SH:- Supplying and Stacking post seal bags cold mix in various Rds).	98700/-	2000/-	350/-	30 days	Class-D
7	A/R & M/O on various roads Mashobra Section under Sub-Division Mashobra (SH:- Supplying and Stacking post seal bags cold mix in various Rds).	99120/-	2000/-	350/-	30 days	Class-D
8	A/R & M/O various roads under Dhalli Section under Sub-Division No.1 (SH:- Providing staff for maintenance on various roads for the year 2026-27 for w.e.f.01-07-2026 to 31-07-2026.	99796/-	2000/-	350/-	30 days	Class-D
9	A/R & M/O various roads under Lakkar Bazaar Section under Sub-Division NO.1 (SH:- Providing Staff for Maintenance on various roads for the year 2026-27 for w.e.f. 01-07-2026-31-07-2026.	99796/-	2000/-	350/-	30 days	Class-D
10	A/R & M/O various roads under Bharari Section under Sub-Division NO.1 (SH:- Providing Staff for Maintenance on various roads for the year 2026-27 for w.e.f. 01-07-2026-31-07-2026.	99796/-	2000/-	350/-	30 days	Class-D
11	A/R & M/O of road from Mundaghat to Binchar Karyal (SH:- Preparation of FRA case in all respect).	70000/-	1400/-	350/-	30 days	Class-D
12	A/R & M/O of Ambulance road from Shilli to Behradhar via Dhalli (SH:- Preparation of FRA case in all respect).	70000/-	1400/-	350/-	30 days	Class-D
13	Improvement of Bhattakuffer to AIMSS road Km. 0/000 to 2/240 (SH:- Providing and fixing W-metal beam crash barrier on various reaches/RDs from Km. 0/170 to 340).	96364/-	2000/-	350/-	30 days	Class-D
14	Improvement of Bhattakuffer to AIMSS road Km. 0/000 to 2/240 (SH:- Providing and fixing W-metal beam crash barrier on various reaches/RDs from Km. 0/170 to 340).	96244/-	2000/-	350/-	30 days	Class-D
15	A/R & M/O on Kamyana Pawabo Dummi road Km. 0/000 to 3/970 (SH:- Maintenance of Drain ,Trimming of glass, Maintenance of earthen shoulder and Hume Pipe, white washing etc at various RDs).	95355/-	2000/-	350/-	30 days	Class-D
16	Special repair work of PWD rest House Junga (SH:- Providing furniture material).	99785/-	2000/-	350/-	30 days	Class-D
17	Special repair work of PWD rest House at Junga (SH:- Restuffing of furniture).	99700/-	2000/-	350/-	30 days	Class-D
18	Special repair work of PWD rest House at Junga (SH:- Polishing and Providing furniture items).	99700/-	2000/-	350/-	30 days	Class-D
19	Special repair work of PWD rest House at Junga (SH:- Polishing and Providing furniture items).	96740/-	2000/-	350/-	30 days	Class-D

It is certified that the above works are required to be carried out immediately being emergent nature of work in public interest.

The tender documents shall be issued only to those contractor/Firm who fulfill the following documents with the application.

1. The valid enlistment/Registration of contractor in Appropriate Class.
2. Permanent account No. (PAN NO).
3. G.S.T No.
4. Earnest Money in the shape of National saving certificate/time deposit account in the any of the post office in HP. F.D.R from any Nationalized Bank duly pleaded in favour of the Executive Engineer Division Kasumpti HPPWD Shimla.
5. The earnest & cost of tender form for the above works should be submitted with the application for the purchase of the tender form. The application received without earnest money & cost of tender form shall summarily be rejected.
6. The officer of the tender shall remain valid up to 75 days after the opening of tender.

7. Ambiguous/telephonic /conditional tenders or tender by fax/e mail shall not be considered and will be summarily be rejected.
8. Executive Engineer reserve the right to reject or cancel any or all tenders without assigning any reasons.
9. If the date given above happens to be holiday the same shall be processed on next working day.
10. The Contractor/firms must quote their rates in words as well as in figures failing which EXN reserve the right to accept/reject any or all tenders.
11. The tender forms shall not be issued to those contractors/firms whose previous performance is not found satisfactory and who have not executed the previous awarded works within the stipulated period of completion.
12. One contractor shall not have more *than* two major works in hand at a time.
13. Work should be completed by the contractor within stipulated period.


Executive Engineer,
Division Kasumpti.,
HPPWD. Shimla-3.

No.PW-SD-I/CB-Tender/2026-2027-

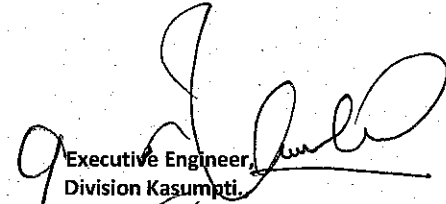
10852-65

Dated :-

11/7/26

Copy forwarded to:-

1. Copy to the Deputy Commissioner Shimla Distt. Shimla.
2. Copy to the Executive Engineer Shimla Division No-III HPPWD Shimla.
3. Copy to the Sub Divisional Magistrate (U) Shimla.
4. Copy to the Sub Divisional Magistrate (R) Shimla.
5. Copy to Municipal committee Shimla Distt. Shimla.
6. Copy to Block Development officer Mashobra Distt. Shimla.
7. All the Assistant Engineers under this Division, HPPWD Shimla-3.
8. Superintendent / HDM /DAO.
9. Notice Board.


Executive Engineer,
Division Kasumpti.,
HPPWD. Shimla.

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-						Estimated Cost:- 99,120.00	
NAME OF WORK:- A/R & M/O on Various roads Janedghat section under Junga Sub Division						Earnest Money :-2,000.00	
(SH:- Supplying and Stacking Pot seal bags cold mix in Various Rds).						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge.	94.40	Nos	1050.00	Rupees One Thousand Fifty Only	Per Each	99120.00
						Total	99120.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						

DNIT approved for Rs. 99120/- Only vide DNIT Register Sr.No. 18...9
the financial year 2026-27. TIS No. 10189-90 ch 11-6-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-						Estimated Cost:- 99,750.00	
NAME OF WORK:- A/R & M/O on Various roads Mehli section under Sub Division						Earnest Money :-2,000.00	
Kasumpti(SH:- Supplying and Stacking Pot seal bags cold mix in Various Rds).						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge.	95.00	Nos	1050.00	Rupees One Thousand Fifty Only	Per Each	99750.00
						Total	99750.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						

DNIT approved for Rs. 99750/- Only vide DNIT Register Sr.No. 19.0...
the financial year 2026-27. T/S.M. 10191-92 ch 19-6-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

DS 102743
Executive Engineer,
HPPWD Division,
Kasumpti Shimla

DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-						Estimated Cost:- 99,750.00	
NAME OF WORK:- A/R & M/O on Various roads Pari Mehal section under Sub Division						Earnest Money :-2,000.00	
Kasumpti(SH:- Supplying and Stacking Pot seal bags cold mix in Various Rds).						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge.	95.00	Nos	1050.00	Rupees One Thousand Fifty Only	Per Each	99750.00
						Total	99750.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						

DNIT approved for Rs. 99750/- Only vide DNIT Register Sr.No. 191
the financial year 2026-27. TISN-10193-9406 19-6-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

18/02/24
Executive Engineer,
HPPWD Division,
Kasumpti Shimla

DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-

Estimated Cost:- 99,225.00

NAME OF WORK:- A/R & M/O on Various roads AIMSS section under Sub Division No.1 (SH:-

Earnest Money :-2,000.00

Time:- One Month

Supplying and Stacking Pot seal bags cold mix in Various Rds).

Sr. No.	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge.	94.50	Nos	1050.00	Rupees One Thousand Fifty Only	Per Each	99225.00
						Total	99225.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						

DNIT approved for Rs. 99225/- Only vide DNIT Register Sr.No. 192
the financial year 2026-27. TIS No. 10195.96 d/18-6-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
HPPWD Division,
Kasumpti Shimla

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-						Estimated Cost:- 99,700.00	
NAME OF WORK:- A/R & M/O on Various roads Dhalli section under Sub Division No.1 (SH:-						Earnest Money :-2,000.00	
Supplying and Stacking Pot seal bags cold mix in Various Rds).						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge.	94.00	Nos	1050.00	Rupees One Thousand Fifty Only	Per Each	98700.00
						Total	98700.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						

DNIT approved for Rs. 99700/- Only vide DNIT Register Sr.No. 185
the financial year 2026-27. TSN. 10170-71cd 19-6-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

RS 108661 / -
Executive Engineer,
HPPWD Division,
Kasumpti Shimla

DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-						Estimated Cost:- 98,700.00	
NAME OF WORK:- A/R & M/O on Various roads Beulia section under Junga Sub Division						Earnest Money :-2,000.00	
(SH:- Supplying and Stacking Pot seal bags cold mix in Various Rds).						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge.	94.00	Nos	1050.00	Rupees One Thousand Fifty Only	Per Each	98700.00
						Total	98700.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						

DNIT approved for Rs. 98700/- Only vide DNIT Register Sr.No. 186
the financial year 2026-27.

TB No. 10181-82 dtd 19-6-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

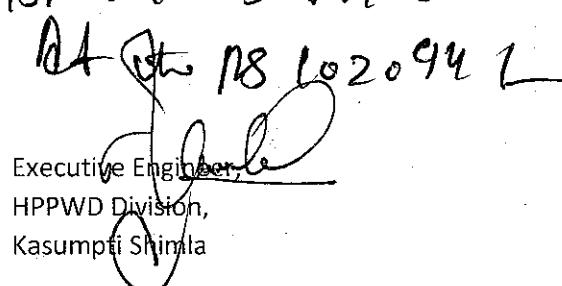
DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-						Estimated Cost:- 99,120.00	
NAME OF WORK:-A/R & M/O on Various roads Mashobra section under Mashobra Sub						Earnest Money :-2,000.00	
Division (SH:- Supplying and Stacking Pot seal bags cold mix in Various Rds).						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge.	94.40	Nos	1050.00	Rupees One Thousand Fifty Only	Per Each	99120.00
						Total	99120.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						

DNIT approved for Rs. 99120/- Only vide DNIT Register Sr.No. 1085
the financial year 2026-27. TIS No 10182-8304 19-6-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer,
 HPPWD Division,
 Kasumpti Shimla

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.						Estimated Cost: 99,796.00	
Name of Work :- A/R & M/O various roads under Dhalli section under sub division NO.1..(SH:-						Earnest Money :- 2000.00	
Providing Staff for maintenance on various roads for the year 2026-27. for w.e.f. 01.07.2026 to 31.07.2026.						Time:- One Month.	
Sr. No	Description of Work / Item (S)	No. of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Engagement of 6 Nos. Beldar for any of duties assigned by Junior Engineer unskilled jobs such as earth work, carriage of material cleaning and washing of areas, assisting plumber carpenter etc cutting of grass and other miscellaneous works assigned by Junior Engineer. (Six No. Beldar for one month) T&P, will be supplied by the department as per the direction of the Engineer-in-Charge.	145.00	Days	688.25	Rupees Six Hundred Eighty Eight and Paise Twenty Five Only	Per Days	99796.00
	Quoted rates Percentage in figures					Total	99796.00
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of Indian standards.

DNIT approved for Rs.99,796/- Only (Rupees Ninety nine thousand seven hundred ninety six only), vide DNIT Register Sr.No. 206 the financial year 2026-27. (T/S No. 10765.66 Dated 25.6.26....

Executive Engineer,
B&R Division Kasumpti,
HPPWD, Winter Field Shimla-3

DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.

Name of Work :-A/R & M/O various roads under Lakker Bazaar section under sub division NO.1.(SH:- Providing Staff for maintenance on various roads for the year 2026-27.for w.e.f.01.07.2026 to 31.07.2026.

Estimated Cost:99,796.00

Earnest Money :-2000.00

Time:- One Month.

Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Engagement of 5 Nos. Beldar for any of duties assigned by Junior Engineer unskilled jobs such as earth work, carriage of material cleaning and washing of areas, assisting plumber carpenter etc cutting of grass and other misclenious works assigned by Junior Engineer.(Six No. Beldar for one month)T&P, will be supplied by the department as per the direction of the Engineer-in-Charge.	145.00	Days	688.25	Rupees Six Hundred Eighty Eight and Paise Twenty Five Only	Per Days	99796.00
						Total	
	Quated rates Percentage in figures						99796.00
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

DNIT approved for Rs.99,796/- Only (Rupees Ninety nine thousand seven hundred ninety six only) vide DNIT Register Sr No. 208 the financial year 2026-27. (T/S No. 1076979 Dated 25-6-26.. Amount to Rs. 99,796/-

Executive Engineer,
B&R Division Kasumpti,
HPPWD Winter Field Shimla-3


DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.						Estimated Cost: 99,796.00	
Name of Work :- A/R & M/O various roads under Bharari section under sub division NO.1. (SH:- Providing Staff for maintenance on various roads for the year 2026-27. for w.e.f. 01.07.2026 to 31.07.2026.						Earnest Money :- 2000.00	
						Time:- One Month.	
Sr. No	Description of Work / Item (S)	No. of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Engagement of 6 Nos. Beldar for any of duties assigned by Junior Engineer unskilled jobs such as earth work, carriage of material cleaning and washing of areas, assisting plumber carpenter etc cutting of grass and other miscellaneous works assigned by Junior Engineer. (Six No. Beldar for one month) T&P, will be supplied by the department as per the direction of the Engineer-in-Charge.	145.00	Days	688.25	Rupees Six Hundred Eighty Eight and Paise Twenty Five Only	Per Days	99796.00
						Total	99796.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of Indian standards.

DNIT approved for Rs. 99,796/- Only (Rupees Ninety nine thousand seven hundred ninety six only) vide DNIT Register Sr. No. 209 the financial year 2026-27. (T/S No. 1071172 Dated 25.6.26. Amount to Rs. 1,02,796/-)


 Executive Engineer,
 B&R Division Kasumpti,
 HPPWD, Winter Field Shimla-3

DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.						Estimated Cost:- 70,000.00	
NAME OF WORK:- A/R & M/O of Road from Mundaghat to Binchar Karyal. (SH:- Preparation of FRA case in all respect).						Earnest Money :- 1,400.00	
						Time:- One Month.	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Collecting the data from site for road preparation of Kml. File Digital with Co-ordinates , Topo sheet and SHP file with preparation of 3 folders complete in all respect up to final approval as per directions of the Engineer-in-Charge.	1.00	Per Case	70000.00	Rupees Seventy Thousand Only	Per Case	70000.00
						Total	70000.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

DNIT approved for Rs. 70,000 /- Only vide DNIT Register Sr.No. 211 the financial year 2026-27.T/S
 NO. 10775-76 DATE 25/6/26 AMT 72,100 /- only

Executive Engineer,
 B& R Division Kasumpti
 HPPWD Winter Field Shimla -3

212

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.						Estimated Cost:- 70,000.00	
NAME OF WORK:- A/R & M/O of Ambulance Road from Shilli to Behradhar via Dhalli. (SH:-						Earnest Money :- 1,400.00	
Preparation of FRA case in all respect).						Time:- One Month.	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Collecting the data from site for road preparation of Kml. File Digital with Co-ordinates , Topo sheet and SHP file with preparation of 3 folders complete in all respect up to final approval as per directions of the Engineer-in-Charge.	1.00	Per Case	70000.00	Rupees Seventy Thousand Only	Per Case	70000.00
						Total	70000.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the

DNIT approved for Rs. 70,000 /- Only vide DNIT Register Sr.No. 212 the financial year 2026-27.T/S
 No. 17728 DATE 25.6.21 AMT 72,100 /- only

Executive Engineer,
 B& R Division Kasumpti
 HPPWD Winter Field Shimla -3

10
010

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 96,364.00		
Name of Work :- Improvement of Bhattakuffer to AIIMS road Km. 0/000 to 2/240. (SH:- Providing and fixing W-metal beam crash barrier on various reaches/RDs from KM 0/170 to 0/340).					Earnest Money :-2,000.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Earth work in excavation by mechanical by manual means over areas (exceeding 30 cm (Thirty centimetre) in depth, 1.5 m (One point five metre) in width as well as 10 sqm (ten Square Metre) on plan) including getting out and disposal of excavated earth all lead and lift as directed by Engineer-in-charge and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required) Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges , within a lead of 50 m. (i)All kinds of soil.	3.33	Cum	400.00	Rupees Four Hundred Only	Per Cubic Metre	1332.00
2	Providing and laying in position cement concrete of specified grade including the cost of centering and Shuttering All work up to plinth level including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 1:2:4 (One cement :Two coarse sand): four graded stone aggregate 20mm (Twenty milimeter) nominal size).	3.33	Cum	6400.00	Rupees Six Thousand Four Hundred Only	Per Cubic Metre	21312.00

3	Providing and erecting a "W" metal beam crash barrier comprising of 3 mm thick corrugated sheet metal beam rail, 70 cm above road / ground level , fixing in ISMC series channel vertical posts , 150x75x5 mm spaced 2 m centre to centre , 1.8 m high , 1.1 m below ground / road level , all steel parts and fittings to be galvanized by hot dipped process all fittings to conform to IS: 1367 and IS : 1364 , metal beam rail to be fixed on the vertical post with a spacer of channel section 150x75x5 mm , 330 mm long complete as per clause 810.) including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.	18.43	Rmt	4000.00	Rupees Four Thousand Only	Per Running meter	73720.00
						Total	96364.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standards.

DNIT approved for Rs. 96,364/- Only vide DNIT Register Sr.No. 199 the financial year 2026-27. T/S NO. 428. DATE 23.6.26 AMT 99,255/- only

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

202

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 96,244.00		
Name of Work :- Improvement of Bhattakuffer to AIIMS road Km. 0/000 to 2/240. (SH:- Providing and fixing					Earnest Money :-2,000.00		
W-metal beam crash barrier on various reaches/RDs from KM 0/000 to 0/170).					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Earth work in excavation by mechanical by manual means over areas (exceeding 30 cm (Thirty centimetre) in depth, 1.5 m (One point five metre) in width as well as 10 sqm (ten Square Metre) on plan) including getting out and disposal of excavated earth all lead and lift as directed by Engineer-in-charge and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) as per satisfaction of Engineer- in - charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required) Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges , within a lead of 50 m. (i)All kinds of soil.	3.33	Cum	400.00	Rupees Four Hundred Only	Per Cubic Metre	1332.00
2	Providing and laying in position cement concrete of specified grade including the cost of centering and Shuttering All work up to plinth level including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 1:2:4 (One cement :Two coarse sand): four graded stone aggregate 20mm (Twenty millimeter) nominal size).	3.33	Cum	6400.00	Rupees Six Thousand Four Hundred Only	Per Cubic Metre	21312.00

Raj

3	Providing and erecting a "W" metal beam crash barrier comprising of 3 mm thick corrugated sheet metal beam rail, 70 cm above road / ground level , fixing in ISMC series channel vertical posts , 150x75x5 mm spaced 2 m centre to centre , 1.8 m high , 1.1 m below ground / road level , all steel parts and fitments to be galvanised by hot dipped process all fittings to conform to IS: 1367 and IS : 1364 , metal beam rail to be fixed on the vertical post with a spacer of channel section 150x75x5 mm ,330 mm long complete as per clause 810.) including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.	18.40	Rmt	4000.00	Rupees Four Thousand Only	Per Running meter	73600.00
						Total	96244.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standards.

DNIT approved for Rs. 96,244 /- Only vide DNIT Register Sr.No. 202 the financial year 2026-27.T/S NO. 10419/20 DATE 23/6/26 AMT 99,131 /- only

Executive Engineer
B& R Division Kasumpti
HRPWD Winter Field Shimla -3

DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 95,355.00		
Name of Work :- A/R & M/O on Kamyana Pawabo Dummi Road Km. 0/000 to 3/970. (SH:- Maintenance of Drain , Trimming of glass, Maintenance of earthen shouder and Hume pipe, White Washing etc at various RD's)					Earnest Money :- 2,000.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	The maintenance of drain include erosion , repair , clearing , cleaning, reshaping ,regarding , deepening of side drain as well as catch water drain as per technical specification Clause 1907. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.	1350.00	Rmt	4.70	Rupees Four and Paise Seventy Only	Per Running Metre	6345.00
2	Cutting of Branches of trees shrubs and trimming of glass and weeds Trimming of glass and weeds from the shoulder / berms and disposing off the same to suitable location as per technical specification Clause 1914. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.	1503.00	Sqm	4.04	Rupees Four and Paise Four Only	Per Square metre	6072.00
3	Maintance of Earthen shoulders stripping of excess oil from the shoulder surface to achive the approved level and compactor at OMC as per drawing and technical specification Clause 1903. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.	942.50	Sqm	42.30	Rupees Forty Two and Paise Thirty Only	Per Square metre	39868.00

4	White washing of parapet walls of CD work and tree trunks White washing two coats on parapet walls and tree trunks including preparation of surface by cleaning scraping etc , as per technical specification Clause 1915. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.	455.00	Sqm	34.00	Rupees Thirty Four Only	Per Square metre	15470.00
5	The maintenance of Hume pipe Culvert by way of clearing , cleaning, Erosion, repairs to cracks , parapet wall and protection work as per drawing and technical specification Clause 1908. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.	12.00	Nos	2300.00	Rupees Two Thousand Three Hundred Only	Each	27600.00
						Total	95355.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

DNIT approved for Rs. 95,355 /- Only vide DNIT Register Sr.No/116... the financial year 2026-27.T/S NO.10528-29 DATE 23.6.26 AMT 98,216 /- only

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

158

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-					Estimated Cost:- 99,785.00		
Name of Work :- Special repair work of PWD rest House Junga (SH:- Providing furniture material).					Earnest Money :- 2000.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Providing and fixing curtain of superior quality cloth as per approved sample of DD- Home Décor make including quality of cloth, design and shade etc specified length and standard with 48" including stitching complete carriage of materials in all leads as per directions of the Engineer-in-Charge. Stiched Curtain haaving lenght 2.50 to 2.60 meters.	29.00	Nos	2125.00	Rupees Two Thousand One Hundred Twenty Five Only	Each	61625.00
2	Providing and fixing curtain of superior quality cloth as per approved sample of DD- Home Décor make including quality of cloth, design and shade etc specified length and standard with 48" including stitching complete carriage of materials in all leads as per directions of the Engineer-in-Charge. Stiched Curtain haaving lenght 2.65 meters.	12.00	Nos	2230.00	Rupees Two Thousand Two Hundred Thirty Only	Each	26760.00
3	Providing and fixing curtain of superior quality cloth as per approved sample of D- Décor make 500 gsm including quality of cloth, design and shade etc specified length and standard with 48" including stitching complete carriage of materials in all leads as per directions of the Engineer-in-Charge. Stiched Curtain haaving lenght 2.05 to 2.10 meters.	6.00	Nos	1900.00	Rupees One Thousand Nine Hundred Only	Each	11400.00
						Total	99785.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words					G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

DNIT approved for Rs. 99,785 /- Only vide DNIT Register Sr.No. 156 the financial year 2026-27.T/S NO. 9985-86 DATE 15.6.26 AMT 1,02,778/- only

Executive Engineer
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

153
070

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.						Estimated Cost:- 99,700.00	
Name of Work :- Special repair work of PWD rest House at Junga (SH:- Restuffing of furniture).						Earnest Money :- 2000.00	
						Time:- One Month.	
Sr. No	Description of Work / Item (S)	No. of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Re-stuffing of sofa-set/chair using 3" thick korfoam band with superioir quality foam sheet in seat & back fixing padding with latex with superioir quality tapestry cloth (latherite material) in proper position . THREE SEATER SOFA CHAIRS.	3.00	Nos	16500.00	Rupees Sixteen Thousand Five Hundred Only	Each	49500.00
2	Re-stuffing of sofa-set/chair using 3" thick korfoam band with superioir quality foam sheet in seat & back fixing padding with latex with superioir quality tapestry cloth (latherite material) in proper position . TWO SEATER SOFA CHAIRS.	1.00	Nos	10700.00	Rupees Ten Thousand Seven Hundred Only	Each	10700.00
3	Re-stuffing of Dinning chair (without arms) using 3" thick korfoam band with superioir quality foam sheet in seat & back fixing padding with latex with superioir quality tapestry cloth (latherite material) in proper position .	11.00	Nos	2500.00	Rupees Two Thousand Five Hundred Only	Each	27500.00
4	Re-stuffing of Wooden Puffy using 3" thick korfoam band with superioir quality foam sheet in seat .	6.00	Nos	2000.00	Rupees Two Thousand Only	Each	12000.00
						Total	99700.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the

DNIT approved for Rs. 99,700/- Only vide DNIT Register Sr.No. 153 the financial year 2026-27. T/S NO. 9979, DATE 15.6.26 AMT 1,02,691/- only

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

153
D/C

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-					Estimated Cost:- 96,740.00		
Name of Work :- Special repair work of PWD rest House at Junga (SH:- Polishing and Providing furniture items).					Earnest Money :- 2000.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Providing and Supplying Quilt of Dream warm quilt (Single)	2.00	Nos	3200.00	Rupees Three Thousand Two Hundred Only	Each	6400.00
2	Providing and Supplying Matteresses of krfoam band 72"x36"x4"	3.00	Nos	17500.00	Rupees Seventeen Thousand Five Hundred Only	Each	52500.00
3	Providing and Supplying Matteresses for VIP set of krfoam band 72"x36"x5"	1.00	Nos	26770.00	Rupees Twenty Six Thousand Seven Hundred Seventy Only	Each	26770.00
4	Providing and Supplying Door mat kanta Mat Green grass 31"x48" duraturf kanta mat (Main entry)	1.00	Nos	3270.00	Rupees Three Thousand Two Hundred Seventy Only	Each	3270.00
5	Providing and Supplying Bathroom foot Mat of Size	8.00	Nos	975.00	Rupees Nine Hundred Seventy Five Only	Each	7800.00
						Total	96740.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

DNIT approved for Rs. 96,740 /- Only vide DNIT Register Sr.No. 155 the financial year 2026-27/T/S
NO. 99,639/2026 AMT 99,642 /- only

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

154

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-					Estimated Cost:- 99,700.00		
Name of Work :- Special repair work of PWD rest House at Junga (SH:- Polishing and Providing furniture items).					Earnest Money :- 2000.00		
					Time:- One Month.		
Sr. No.	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Polishing / Painting one more coats with PU polish of required shade on old wooden furniture to give an even surface including cleaning the surface of all dirt, dust and sand papered smooth, including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Dico Paint) (VIP set) (1 No. 3 seater , 4 No single seater , 1 No 2 seater)	9.00	Nos	1550.00	Rupees One Thousand Five Hundred Fifty Only	Each	13950.00
2	Polishing / Painting one more coats with PU polish of required shade on old wooden furniture to give an even surface including cleaning the surface of all dirt, dust and sand papered smooth, including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Dico Paint) (VIP set) (5 No. Center table , 1 No . Dinning table complete disco paint)	5.00	Nos	1550.00	Rupees One Thousand Five Hundred Fifty Only	Each	7750.00
3	Polishing / Painting one more coats with PU polish of required shade on old wooden furniture to give an even surface including cleaning the surface of all dirt, dust and sand papered smooth, including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Dico Paint) (VIP set) (6 No. Dinning chair complete disco paint)	6.00	Nos	700.00	Rupees Seven Hundred Only	Each	4200.00
4	Polishing one more coats with PU polish of required shade on old wooden furniture to give an even surface including cleaning the surface of all dirt, dust and sand papered smooth, including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 3 Seater .	2.00	Nos	3000.00	Rupees Three Thousand Only	Each	6000.00
ii	Single Seater	4.00	Nos	2000.00	Rupees Two Thousand Only	Each	8000.00
iii	Easy chair with arm	12.00	Nos	1500.00	Rupees One Thousand Five Hundred Only	Each	18000.00

iv	Center table	8.00	Nos	1500.00	Rupees One Thousand Five Hundred Only	Each	12000.00
v	Dinning table	2.00	Nos	1500.00	Rupees One Thousand Five Hundred Only	Each	3000.00
vi	Puffy	7.00	Nos	350.00	Rupees Three Hundred Fifty Only	Each	2450.00
5	Providing and Supplying Quilt of Dream warm quilt (Double)	2.00	Nos	6950.00	Rupees Six Thousand Nine Hundred Fifty Only	Each	13900.00
6	Providing and Supplying pillow fiber RECWELL Company	11.00	Nos	950.00	Rupees Nine Hundred Fifty Only	Each	10450.00
						Total	99700.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

DNIT approved for Rs. 99,700 /- Only vide DNIT Register Sr.No. 154 the financial year 2026-27.T/S NO. 2981 DATE 15.6.2026 AMT 1,02,691 /- only

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla -3