

Himachal Pradesh
Public Works Department

No. PW-KD- CTR- Tender-NIT/2026-2027- 17485-86 Dated:- 19-09-2026

To

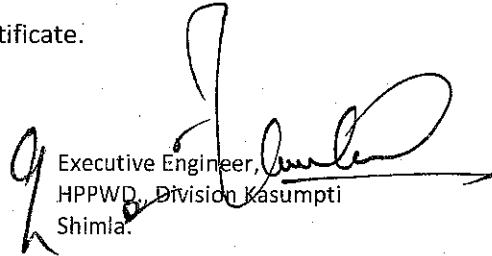
The Executive Engineer (IT Cell)
Nigam Vihar Shimla.

Subject :- Publication of Tender Notice.

Jai Hind

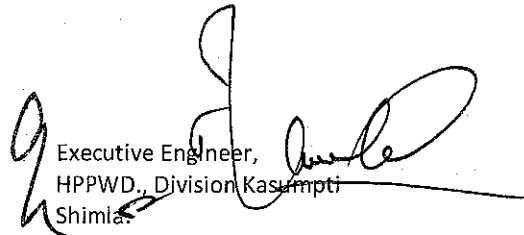
Enclosed please find herewith the tender Notice of work as given in the Notice Inviting tender for uploading on department website as per notification Pr. Secy. (PW) to the Govt. of Himachal Pradesh letter No. PBW (B)A(3)1/2024 dated Shimla-2 the 03-01-2024 and PWD-B-A0(3)/8/2025- 300858 dated 09-10-2025 as the works mentioned in the tender notice are urgent in nature and in public interest.

DA:- Notice Inviting Tender & Schedule of Quantity and Certificate.


Executive Engineer,
HPPWD, Division Kasumpti
Shimla.

Copy forwarded to for further necessary action please.

1. The Superintending Engineer 4th Circle HPPWD Shimla .


Executive Engineer,
HPPWD, Division Kasumpti
Shimla.

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDERS**

Executive Engineer B&R Division Kasumpti HPPWD Shimla for the following works on behalf of the Government of Himachal Pradesh from the eligible contractors enlisted in HPPWD, so as to reach in the office as per time schedule given below:-

- | | |
|--|--------------------------------------|
| 1. Date of receipt of application for tender forms:- | 28-09-09-2026 10:00 AM upto 12:00 PM |
| 2. Dated of Issue /sale of tender forms:- | 28-09-2026 12:00 PM upto 4:00 PM |
| 3. Date of receipt of tender:- | 29-09-2026 .up to 10:30 AM |
| 4. Date of opening of tender:- | 29-09-2026 up to 11:00 AM |

Sr. No.	Name of Work	Estimated cost	EMD(Rs .)	Cost of Tender (Rs.)	Time Limit	Eligible class of Contractor
1	A/R & M/O on Tipra to jagroti road Km. 0/00 to 6/00 (SH:- Construction of Retaining wall RD. 1/570 to 1/572.50) (Excluding GST).	84549/-	1700/-	350/-	30 days	Class-D
2	A/R & M/O various residential Qtrs. under Division No.VIII Kasumpti Shimla-9 (SH:- White washing /Distemping in Type-III set no. 47 and other due/on vacation sets under Kasumpti Sub-Division) (Excluding GST).	84523/-	1700/-	350/-	30 days	Class-D
3	Preparation of Detailed project report, detailed estimate/working estimate along with justification with detailed analysis of rate for various type-I to type-VI Qtrs of heath department at Parimahal Kasumpti Shimla.	29661/-	600/-	350/-	30 days	Class-D
4	A/R & M/O on Tipra to jagroti road Km. 0/00 to 6/00 (SH:- Construction of Retaining wall RD. 1/572.50 to 1/575) (Excluding GST).	84549/-	1700/-	350/-	30 days	Class-D
5	Restoration of Rain damages on sadhora to Mohanpur road Km. 0/000 to /250 (SH:-C/O B/Wall between at RD. 1/690 to 1/717) (Under PDNA).	408305/-	8200/-	350/-	30 days	Class-D
6	Restoration of rain damages on Sadhora to Mohanpur road Km. 0/000 to 250 (SH:- C/O R/Wall between RD. 1/590 to 1/601) (Under PDNA).	415929/-	8400/-	350/-	30 days	Class-D
7	Restoration of rain damages on Shilabag to Kwanti road in Km. 0/000 to 3/000 (SH:-C/O R/Wall between RD 0/465 to 0/477) (Under PDNA) (Excluding GST).	357605/-	7200/-	350/-	30 days	Class-D
8	Restoration of rain damages on Shilabag to Kwanti road in Km. 1/000 to 1/000 (SH:-C/O R/Wall between RD 0/450 to 0/462) (Under PDNA) (Excluding GST).	359470/-	7200/-	350/-	30 days	Class-D
9	A/R & M/O Mehli to Rani Ground Via IAS Colony Km. 0/000 to 0/920 (SH:- C/O R/Wall between RD. 0/830 to 0/840) Under PDNA (Excluding GST).	232763/-	4700/-	350/-	30 days	Class-D
10	R/O & R/D on Shoghi, Mehli, Junga, Sadhupul road Km. 12/375 to 48/925 (SH:- C/O PCC R/Wall at RD 46/580 to 46/591) PDNA (Excluding GST).	375472/-	7600/-	350/-	30 days	Class-D
11	R/O & R/D on Shoghi, Mehli, Junga, Sadhupul road Km. 12/375 to 48/925 (SH:- C/O PCC R/Wall at RD 46/915 to 46/924) PDNA (Excluding GST).	373665/-	8000/-	350/-	30 days	Class-D
12	A/R & M/O various RESidnetial Qtrs under Division No.VIII kasumpti Shimla-3 (SH:- White washing/Distempering in type-II set no.612,620,630,631,632 under kasumpti Sub division)(Excluding GST).	84705/-	1700/-	350	30 days	Class-D
13	A/R & M/O various Type-I & Type-VI Qtrs of GAD at mehli Kasumpti Shimla-9 (SH:- Providing and fixing PVC Flooring in GF in Type-VI set No.1 at kasumpti Shimla-9.	81470	1700	350	30 days	Class-D
14	A/R & M/O various type-I & type-VI Qtrs of GAD at mehli kasumpti Shimla-9 (SH:- Providing and fixing PVC flooring and unitex carpet in FF in type-VI Set no.1 at kasumpti Shimla-9 (Excludung GST).	82043/-	1700/-	350/-	30 days	Class-D
15	A/R & M/O various type-I and Thype-VI GAD Qtrs at kasumpti Shimla (SH:- P/F Cupboard in type-II set nO.24 and white washing/Distempring under Mehli section)(Excluding GST).	83006/-	1700/-	350/-	30 days	Class-D
16	A/R & M/O Policew Chowki Building kasumpti Shimla-9 (SH:- Internal/External painting in police chowki building under kasumpti section).	75760/-	1600/-	350/-	30 days	Class-D
17	Restoration of Rain damages on Eversunny to Pagog road Km.0/00 to 5/000 (SH:-C/O unlined drain, Maintenance of earthen shoulder and Hume pipe culvert removal of land slides etc. at various Rds.) (UNDER PDNA)(Excluding GST)	421999	8500	350/-	30 days	Class-D
18	Restoation of rain damges on Bhattakuffer koti rod km. 0/00 to 14/930 (SH;- Constrcution of Retaining wall with toe wall Rd. 1/460 to 1/471 (Excluding GST)under PDNA	386878/-	7800/-	350/-	30 days	Class-D
19	Restoation of rain damges on Bhattakuffer koti road km . 0/00 to 14/930 (SH;- Removal of slips various RDs and miscellaneous work Tipra to jagroti road km. 0/00 to 6/00(Excluding GST)(Under PDNA)	423719/-	8500/-	350/-	30 days	Class-D
20	A/R & M/O on various roads junga section under junga sub Division (SH;- Supplying and stacking pot seal bags cold mix in various Rds)	83644/-	1700/-	350/-	30 days	Class-D
21	A/R & M/O on various roads Baldiyan section under sub Division Masohbra (SH;- Supplying and stacking pot seal bags cold mix in various Rds)	80975/-	1700/-	350/-	30 days	Class-D
22	A/R & M/O on vaious roads Mashobra section under sub Division (SH;- Supplying and stacking pot seal bags cold mix in various Rds)	81664/-	1700/-	350/-	30 days	Class-D

23	A/R & M/O on various roads Bharari section under sub Division No.1 (SH;- Supplying and stacking pot seal bags cold mix in various Rds)	82754/-	1700/-	350/-	30 days	Class-D
24	A/R & M/O various Residential Qtrs at kasumpti Shimla-9 (SH:- Providing and fixing Glass pans, vanity & on e piece sheat etc in type-V set No.15 at kasumpti Shimla)(Excluding GST).	84563/-	1700/-	350/-	30 days	Class-D

It is certified that the above works are required to be carried out immediately being emergent nature of work in public interest. The tender documents shall be issued only to those contractor/Firm who fulfill the following documents with the application.

1. The valid enlistment/Registration of contractor in Appropriate Class.
2. Permanent account No. (PAN NO).
3. G.S.T No.
4. Earnest Money in the shape of National saving certificate/time deposit account in the any of the post office in HP. F.D.R from any Nationalized Bank duly pleaded in favour of the Executive Engineer Division Kasumpti HPPWD Shimla.
5. The earnest & cost of tender form for the above works should be submitted with the application for the purchase of the tender form. The application received without earnest money & cost of tender form shall summarily be rejected.
6. The officer of the tender shall remain valid up to 75 days after the opening of tender.
7. Ambiguous/telephonic /conditional tenders or tender by fax/E mail shall not be considered and will be summarily be rejected.
8. Executive Engineer reserve the right to reject or cancel any or all tenders without assigning any reasons.
9. If the date given above happens to be holiday the same shall be processed on next working day.
10. The Contractor/firms must quote their rates in words as well as in figures failing which EXN reserve the right to accept/reject any or all tenders.
11. The tender forms shall not be issued to those contractors/firms whose previous performance is not found satisfactory and who have not executed the previous awarded works within the stipulated period of completion.
12. One contractor shall not have more than two major works in hand at a time.
13. Work should be completed by the contractor within stipulated period.

No.PW-SD-I/CB-Tender/2026-2027-
Copy forwarded to:-

1. Copy to the Deputy Commissioner Shimla Distt. Shimla.
2. Copy to the Executive Engineer Shimla Division No-III HPPWD Shimla.
3. Copy to the Sub Divisional Magistrate (U) Shimla.
4. Copy to the Sub Divisional Magistrate (R) Shimla.
5. Copy to Municipal committee Shimla Distt. Shimla.
6. Copy to Block Development officer Mashobra Distt. Shimla.
7. All the Assistant Engineers under this Division, HPPWD Shimla-3.
8. Superintendent / HDM /DAO.
9. Notice Board.

Executive Engineer,
Division Kasumpti.,
HPPWD. Shimla-3.

Dated :- 19-09-2026

Executive Engineer,
Division Kasumpti.,
HPPWD Shimla.


SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 84,549.00		
Name of Work :-A/R & M/O on Tipra to Jagroti road km.0/00 to 6/00. (SH:- Construction of Retaining wall Rd.1/570 to1/572.50) . (Excluding GST)					Earnest Money :- 1700.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	3.75	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	1033.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required).All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	3.75	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	1271.00

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. a) Cement Mortar 1:6:12(One cement: six sand: twelve graded stone agg.40mm nominal size). (Excluding GST)	1.50	Cum	2966.10	Rupees Two Thousand Nine Hundred Sixty Six and Paise Ten Only	Per Cubic Metre	4449.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate20 mm(Twenty milimetre) nominal size).(Excluding GST)	18.40	Cum	4067.80	Rupees Four Thousand Sixty Seven and Paise Seventy Nine Only	Per Cubic Metre	74847.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (a) Granular material. (Excluding GST)	1.65	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	1678.00
6	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	7.50	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running meter	1271.00
						Total	84549.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

SR No-558 1/S No-17143-44 Rs.1,02,761/- Dtd 15-9-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


Executive Engineer,
B&R Division Kasumpti,
HPPWD, Winter Field Shimla-3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 84,523.00		
Name of Work :- A/R & M/O various residential Qtrs under Division No.-VIII, Kasumpti, Shimla-9. (SH:- White washing / Distemping in Type-III Set no. 47 and other due/on vacation sets under Kasumpti Sub - Division.) (Excluding GST)					Earnest Money :- 1,700.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Distemping with oil bound washable distemper of approved brand and manufacture to give an even shade (i) Old work (one or more coats) including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	173.00	Sqm	55.08	Rupees Fifty Five and Paise Eight Only	Per Square Meter	9530.00
2	Wall painting with plastic emulsion paint of approved brand and manufacture to give an even shade with including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) One more coats on old work (Excluding GST)	400.00	Sqm	59.32	Rupees Fifty Nine and Paise Thirty Two Only	Per Square metre	23729.00
3	Removing dry or oil bound distemper, water proofing cement paint and the like By scrapping and sand papering the wall surface smooth including necessary repairs to scratches complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	408.40	Sqm	10.17	Rupees Ten and Paise Sixteen Only	Per Square Metre	4153.00
4	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	218.05	Sqm	59.32	Rupees Fifty Nine and Paise Thirty Two Only	Per Square Meter	12935.00
5	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i) One or more coats on old work (Excluding GST)	340.00	Sqm	63.56	Rupees Sixty Three and Paise Fifty Five Only	Per Square Meter	21610.00

6.	Finishing wall with weather proof exterior grade emulsion of approved design Apexultima Protek) or its equarled on undecorated wall surfaces (two coats) to give an even shade and final finish after thoroughly cleaning the surface to remove all dirt, dust and other foreign matter etc including sand paper smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	40.00	Sqm	101.69	Rupees One Hundred One and Paise Sixty Nine Only	Per Square Meter	4068.00
7	Melamine polishing on wood work (one or more coat) with including carriage of mateirals in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	15.00	Sqm	296.61	Rupees Two Hundred Ninety Six and Paise Sixty	Per Square metre	4449.00
8	Disposal of muck /denris/ excavated earth upto site approved by Municipal Corporation surrounding Shimla upto all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	7.35	Cum	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Per Cubic Metre	4049.00
						Total	84523.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

SRNO-546 T/SNO-16720-21 Rs. 102728/- Dt 8/9/26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla-3

550

SCHEDULE OF QUANTITY								
Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.							Estimated Cost:- 29661.00	
Name of Work :- Preparation of Detailed Project Report ,Detailed Estimate /Working Estimate alongwith							Earnest Money :- 600.00	
Justification with detailed Analysis of Rate for Various Type-1 to Type-VI Qtrs of Health Department at							Time:- One Month.	
Pari Mehal Kasumpti Shimla.								
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount Excluding GST	
				In figures	In words			
1	Preparation of Detailed Project Report ,Detailed Estimate /Working Estimate alongwith Justification with detailed Analysis of Rate for Various Type-1 to Type-VI Qtrs of Health Department at Pari Mehal Kasumpti Shimla. But Excluding GST. including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge	1.00	Nos	29661.00	Rupees Twenty Nine Thousand Six Hundred Sixty One Only	Each	29661.00	
						Total	29661.00	
	Quated rates Percentage in figures							
	Quoted rates Percentage in words							
						G.Total		

SRNO-550-1/3/16-16718-19 Rs. 36050/- Dt 8-9-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

569

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 84,549.00		
Name of Work :- A/R & M/O on Tipra to Jagroti road km.0/00 to 6/00. (SH:- Construction of Retaining wall Rd.1/572.50 to 1/575) . (Excluding GST)					Earnest Money :- 1700.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No. of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	3.75	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	1033.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required).All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	3.75	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	1271.00

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. a) Cement Mortar 1:6:12(One cement: six sand: twelve graded stone agg.40mm nominal size). .(Excluding GST)	1.50	Cum	2966.10	Rupees Two Thousand Nine Hundred Sixty Six and Paise Ten Only	Per Cubic Metre	4449.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate20 mm(Twenty milimetre) nominal size)..(Excluding GST)	18.40	Cum	4067.80	Rupees Four Thousand Sixty Seven and Paise Seventy Nine Only	Per Cubic Metre	74847.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (a) Granular material. .(Excluding GST)	1.65	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	1678.00
6	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. .(Excluding GST)	7.50	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running meter	1271.00
						Total	84549.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

SR No-5697/S No-17145-46 Rs-1,02,761/- Dt 15/9/26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
B&R Division Kasumpti,
HPPWD, Winter Field Shimla-3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 408305.00		
Name of Work :-Restoration of Rain Damages on Sadhora to Mohanpur road Km 0/000 to /250. (SH:-					Earnest Money :- 8200.00		
Construction of B/Wall between Rd 1/690 to 1/717) (Under PDNA).					Time:- Two Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	61.83	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	17029.00
2.	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	12.69	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	4302.00

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802.803.1202 and 1203 .But Excluding GST. including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . . (a) Cement Mortar 1:6:12 (One cement: six sand: Twelve graded stone agg.40mm nominal size).	12.69	Cum	2881.36	Rupees Two Thousand Eight Hundred Eighty One and Paise Thirty Five Only	Per Cubic Metre	36564.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802.803.1202 and 1203 .But Excluding GST. .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . . (a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate 40 mm(Forty metre) nominal size).	92.61	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	345325.00
5	Providing weep holes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614. 709. 1204.3.7 .But Excluding GST. including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	30.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Runing metre	5085.00
					Total		408305.00

SRNO-568 1/SNO-17179-80 Rs 496254/- Dt 15/9/26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
HPPWD Division,
Kasumpti Shimla

SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 415929.00		
Name of Work :-Restoration of Rain Damages on Sadhora to Mohanpur road Km 0/000 to /250. (SH:-					Earnest Money :- 8400.00		
Construction of R/Wall between Rd 1/590 to 1/601) (Under PDNA)-2025					Time:- Two Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	19.80	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	5453.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical .But Excluding GST, including hauling of materials in all leads and	4.29	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	1454.00

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802.803.1202 and 1203 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . . (a) Cement Mortar 1:6:12 (One cement: six sand: Twelve graded stone agg.40mm nominal size).	4.29	Cum	2881.36	Rupees Two Thousand Eight Hundred Eighty One and Paise Thirty Five Only	Per Cubic Metre	12361.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802.803.1202 and 1203 .But Excluding GST. .But Excluding GST. including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . .(a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate 40 mm(Forty metre) nominal size).	100.65	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	375305.00
5	Providing weep holes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	24.00	Rm	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Runing metre	4068.00
6	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 .But Excluding GST. including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . (a) Granular material.	17.00	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	17288.00
					Total		415929.00

SR No- 567 T/S No- 17172-73 RA- 505520/- R D+15/9/26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

SCHEDULE OF QUANTITY							
Tender inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 357605.00.00		
Name of Work :-Restoration of Rain Damages on Shilabag to Kwanti road in Km. 0/000 to 3/000. (SH:-					Earnest Money :- 7200.00		
Construction of R/Wall between Rd 0/465 to 0/477) (Under PDNA).(Excluding GST).					Time:- Two Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site.. according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in-Charge.as per direction of Engineer-In-Charge .	27.00	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	7436.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site. according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	5.00	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	1695.00

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . (a) Cement Mortar 1:6:12 (One cement: six sand: Twelve graded stone agg.40mm nominal size).	5.00	Cum	2881.36	Rupees Two Thousand Eight Hundred Eighty One and Paise Thirty Six Only	Per Cubic Metre	14407.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203.But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge (a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate40 mm(forty milimetre) nominal size).	85.50	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	318813.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . (a) Granular material.	11.00	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	11186.00
6	Providing weep holes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	24.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Runing metre	4068.00
					Total		357605.00

SR No-566 T/S No-17170-71 RA-434633/Dt 15-9-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 359470.00		
Name of Work :-Restoration of Rain Damages on Shilabag to Kwanti road in Km. 1/000 to 1/000. (SH:-					Earnest Money :- 7200.00		
Construction of R/Wall between Rd 0/450 to 0/462) (Under PDNA).(Excluding GST).					Time:- Two Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils. including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost) Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in-Charge.as per direction of Engineer-In-Charge .	27.00	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	7436.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	5.00	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	1695.00

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-in-Charge . (a) Cement Mortar 1:6:12 (One cement: six sand: Twelve graded stone agg.40mm nominal size).	5.00	Cum	2881.36	Rupees Two Thousand Eight Hundred Eighty One and Paise Thirty Six Only	Per Cubic Metre	14407.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge (a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate40 mm(forty milimetre) nominal size).	86.00	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	320678.00
5	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . (a) Granular material.	11.00	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	11186.00
6	Providing weep holes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In- Charge	24.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Runing metre	4068.00
					Total		359470.00

SR No- 565 T/S No- 17168-69 Rs. 436900/- Dt 15-9-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 232763.00		
Name of Work :- A/R & M/O Mehli to Rani Ground Via IAS Colony Km 0/000 to 0/920 (SH:-					Earnest Money :- 4700.00		
Construction of R/Wall between Rd 0/830 to 0/840) Under PDNA.(Excluding GST).					Time:- Two Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils. including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required. setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	29.70	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	8180.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required. setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site. according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	27.23	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	9231.00

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge. (a) Cement Mortar 1:5:10 (One cement: five sand: Ten graded stone agg.40mm nominal size).	5.72	Cum	3220.34	Rupees Three Thousand Two Hundred Twenty and Paise Thirty Three Only	Per Cubic Metre	18420.00
4	Providing concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802,803,1202 & 1203 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge. (i) Nominal mix 1:3:6 (one cement : three sand:six graded stone agg. 40mm (forty milimeter).	32.28	Cum	4661.01	Rupees Four Thousand Six Hundred Sixty One and One Paise Only	Per Cubic Metre	150457.00
5	Providing weep holes in brick masonry / stone masonry /plain reinforced concrete abutment. wing wall. return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	30.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Runing metre	5085.00
6	Backfilling behind abutment. wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.(a) Granular material.	13.20	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	13424.00
7	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.(a) Granular material. (i) Mild steel/Tor steel	300.00	Kgs.	93.22	Rupees Ninety Three and Paise Twenty Two Only	Per Kilo-gram	27966.00
					Total		232763.00

SRNO-564 T/S-No- 17/8/-82 RA-282900/- Dt 15/9/26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA KASUMPTI DIVISION No-I,					Estimated Cost:- 3,75,472.00		
Name of Work :- R/O & R/D on Shoghi, Mehli, Junga, Sadhupul, Road Km. 12/375 to 48/925. (SH:- C/O PCC R/Wall at R/D 46/580 to 46/591). PDNA (Excluding GST)					Earnest Money :- 7,600.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
I	Cutting in Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm (Thirty centimetre) in depth, 1.5 m (One point five metre) in width as well as 10 sqm (ten Square Metre) on plan) including getting out and disposal of excavated earth all lead and lift as directed by Engineer-in-charge and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required) Any loss.to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (i)All kinds of soil. (Excluding GST)	27.50	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	7574.00


2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (Excluding GST)	24.09	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	8166.00
3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 P.C.C nominal mix 1:5:10 (40 mm aggregate). (Excluding GST)	5.28	Cum	3220.34	Rupees Three Thousand Two Hundred Twenty and Paise Thirty Three Only	Per Cubic Metre	17003.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 P.C.C nominal mix 1:4:8 (40 mm aggregate). (Excluding GST)	86.29	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	321759.00

5	Providing weep holes in brick masonry / stone masonry / plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and MORD technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	48.48	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running meter	8217.00
6	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 HPSR 2009 item No 12.14 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	12.54	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	12753.00
						Total	375472.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

SR NO-561 T/3 NO 17149-50 RS. 4,56,349/- Dt 15/9/26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer,
 B& R Division Kasumpti
 HPPWD Winter Field Shimla -3


SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA KASUMPTI DIVISION No-I,					Estimated Cost:- 3,73,665.00		
Name of Work :- R/O & R/D on Shoghi, Mehli, Junga, Sadhupul, Road Km. 12/375 to 48/925. (SH:- C/O					Earnest Money :- 8,000.00		
PCC R/Wall at R/D 46/915 to 46/924) PDNA (Excluding GST)					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Cutting in Earth work in excavation by mechanical means (Hydraulic excavator) manual means over areas (exceeding 30 cm (Thirty centimetre) in depth, 1.5 m (One point five metre) in width as well as 10 sqm (ten Square Metre) on plan) including getting out and disposal of excavated earth all lead and lift as directed by Engineer-in-charge and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required) Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (i)All kinds of soil (Excluding GST)	28.35	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	7808.00

2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer-in-charge at site, according to the HP.PWD, specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (Excluding GST)	24.57	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	8329.00
3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 P.C.C nominal mix 1:5:10 (40 mm aggregate). (Excluding GST)	4.77	Cum	3220.34	Rupees Three Thousand Two Hundred Twenty and Paise Thirty	Per Cubic Metre	15361.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 P.C.C nominal mix 1:4:8 (40 mm aggregate). (Excluding GST)	85.88	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	320231.00

5	Providing weep holes in brick masonry / stone masonry / plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred millimetre) dia PVC pipe extending through the full width of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and MORTI technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge (Excluding GST)	64.62	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running meter	10953.00
6	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 HPSR 2009 item No 12 14 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge (Excluding GST)	10.80	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	10983.00
						Total	373665.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of Indian standars.



 Executive Engineer,
 B& R Division Kasumpti
 HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 84,705.00		
Name of Work :- A/R & M/O various Residential Qtrs under Division No.-VIII, Kasumpti, Shimla-3. (SH:- White washing / Distemping in Type- II Set no. 612, 620, 630, 631, 632, under Kasumpti Sub-Division.) (Excluding GST)					Earnest Money :- 1,700.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No. of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Distemping with oil bound washable distemper of approved brand and manufacture to give an even shade (i) Old work (one or more coats) including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	750.00	Sqm	50.85	Rupees Fifty and Paise Eighty Four Only	Per Square Meter	38136.00
2	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	600.00	Sqm	10.17	Rupees Ten and Paise Sixteen Only	Per Square Meter	6102.00
3	Providing and applying white cement based putty of average thickness 1 mm. of approved brand and manufacturer. over the plastered wall surface to prepare the surface even and smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	262.50	Sqm	55.08	Rupees Fifty Five and Paise Eight Only	Per Square Meter	14460.00
4	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i) One or more coats on old work (Excluding GST)	424.00	Sqm	50.85	Rupees Fifty and Paise Eighty Four Only	Per Square Meter	21559.00
5	Finishing wall with weather proof exterior grade emulsion of approved design Apexultima Protek) or its equarled on undecorated wall surfaces (two coats) to give an even shade and final finish after thoroughly cleaning the surface to remove all dirt, dust and other foreign matter etc including sand paper smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	20.00	Sqm	101.69	Rupees One Hundred One and Paise Sixty Nine Only	Per Square Meter	2034.00

6	Metamine polishing on wood work (one or more coat) with including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	5.00	Sqm	296.61	Rupees Two Hundred Ninety Six and Paise Sixty One Only	Per Square Metre	1483.00
7	Disposal of muck /denris/ excavated earth upto site approved by Municipal Corporation surrounding Shimla upto all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.69	Cum	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Per Cubic Metre	931.00
						Total	84705.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer
 B& R Division Kasumpti
 HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-					Estimated Cost:- 81,470.00		
Name of Work :- A/R & M/O various Type-I & Type-VI Qtrs of GAD at Mehli Kasumpti, Shimla-9. (SH:- Providing and fixing PVC Flooring in GF in Type-VI Set no. 1 at Kasumpti Shimla-171009.) (Excluding GST)					Earnest Money :- 1,700.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Providing and fixing 2 mm thick PVC antistatic vinyl Flooring plain or coloured, carbed or mosaic/metalled finish laid with approved adhesive on sub-floor (damp proofing treatment to be paid for separately) including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	73.95	Sqm	1101.69	Rupees One Thousand One Hundred One and Paise Sixty Nine Only	Per Square Metre	81470.00
						Total	81470.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

SR No-577 T/S No- 17358-59 Rs. 99,019/- Dt 16/9/26

Executive Engineer
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-					Estimated Cost:- 82,043.00		
Name of Work :- A/R & M/O various Type-I & Type-VI Qtrs of GAD at Mehli Kasumpti, Shimla-9. (SH:-					Earnest Money :- 1,700.00		
Providing and fixing PVC Flooring and unitex carpet in FF in Type-VI Set no. 1 at Kasumpti Shimla-171009.) (Excluding GST)					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Providing and fixing 2 mm thick PVC antistatic vinyl Flooring plain or coloured, carbed or mosaic/metalled finish laid with approved adhesive on sub-floor (damp proofing treatment to be paid for separately) including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	70.69	Sqm	1101.69	Rupees One Thousand One Hundred One and Paise Sixty Nine Only	Per Square Metre	77879.00
2	Providing and fixing wooven carpet (Unitex) of superior quality in all shade and colour of approved sample having 6.00mm(Six milimetre) thickness and 1400 grams weight per square meter laid on floor with approved adhasive complete in all respect including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	7.56	Sqm	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Per Square Metre	4164.00
						Total	82043.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

SRNO-576 T/S NO-17360-61 Rs. 16,926,99,715/- 16/9/26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-					Estimated Cost:- 83,006.00		
Name of Work :- A/R & M/O various Type-I and Type-VI GAD Qtrs at, Kasumpti, Shimla-9. (SH:- P/F Cupboard in Type-II Set no. 24 and White washing / Distempering under Mehli Section.) (Excluding GST)					Earnest Money :- 1,700.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Providing and fixing 19mm thick water proof commercial board in shelves/shutters box for cup board with butt joints & fixing with nails & screws etc complete) including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	11.97	Sqm	1228.81	Rupees One Thousand Two Hundred Twenty Eight and Paise Eighty One Only	Per Square Meter	14709.00
2	Providing and fixing 0.80mm thick coloured or plain lamination sheet (sunmica) on boards/ply wood sheets with approved adhesive and nails etc. complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	5.41	Sqm	847.46	Rupees Eight Hundred Forty Seven and Paise Forty Five Only	Per Square meter	4585.00
3	Providing and fixing ply wood lining with butt jointing and nails (frame work and cove fillets to be measured and paid for separately) including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (i) 6mm (six milimetre)thick (Excluding GST)	12.44	Sqm	720.34	Rupees Seven Hundred Twenty and Paise Thirty Three Only	Per Square Meter	8961.00
4	Providing and fixing square edges cover. fillets (beading) 19mmx6mm(Nineteen milimetre into six milimetre) section i/c mitring at junctions with wood screws and nails complete including carriage of materials in all leads and lifts as per directions of the Engineer-In-Charge.(i)1st class deodar wood.	78.85	Rmt	72.03	Rupees Seventy Two and Paise Three Only	Per Running Meter	5680.00
5	Providing and fixing bright finished brass ball catcher 10 mm dia including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	40.00	Nos	55.08	Rupees Fifty Five and Paise Eight Only	Each	2203.00

6	Providing and fixing bright finished brass handles with screws etc complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 100mm (One hundred milimetre) (Excluding GST)	30.00	Nos	152.54	Rupees One Hundred Fifty Two and Paise Fifty Four Only	Each	4576.00
7	Providing and fixing panelled glazed or shutters for doors windows and clerestory windows. Fixing with but hinges of required size with necessary screws,excluding panelling with will be paid for seprately , all complete as per directions of the Engineer-in-Charge. (i) 35 mm thick (a) 2nd class deodar wood. (Excluding GST)	1.80	Sqm	4067.80	Rupees Four Thousand Sixty Seven and Paise Seventy Nine Only	Per Square Metre	7322.00
8	Providing and fixing panelled shutters for doors .Including black enamelled iron butt hinges with necessary screws, all complete as per directions of the Engineer-in-Charge. (i) 35 mm thick (a) 2nd class deodar wood. (Excluding GST)	1.80	Sqm	3559.32	Rupees Three Thousand Five Hundred Fifty Nine and Paise Thirty Two Only	Per Square Metre	6407.00
9	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST) (i) 150x10mm	8.00	Nos.	67.80	Rupees Sixty Seven and Paise Seventy Nine Only	Each	542.00
9.1	(ii) 200x10 mm	5.00	Nos.	93.22	Rupees Ninety Three and Paise Twenty Two Only	Each	466.00
10	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 125 mm (Excluding GST)	4.00	Nos.	67.80	Rupees Sixty Seven and Paise Seventy Nine Only	Each	271.00

11	Providing and fixing bright finished brass hard drawn hooks and eyes,including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 200 mm (Excluding GST)	5.00	Nos	59.32	Rupees Fifty Nine and Paise Thirty Two Only	Each	297.00
12	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	29.01	Sqm	50.85	Rupees Fifty and Paise Eighty Four Only	Per Square Meter	1475.00
13	Applying priming coat over new wood and wood based surfaces after and including prepering the surface by thoroughly cleaning oil,grease,dirt and other foreign matter) sand papering and knotting including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	51.86	Sqm	33.90	Rupees Thirty Three and Paise Eighty Nine Only	Per Square Meter	1758.00
14	Painting two coats(excluding coat) on new wood and wood based surface with enamel paint to give an even shade including cleaning the surface of dirt,dust and other foreign matter,sand papering & stoping including carriage of materials in all leads as per directions of the Engineer-in-Charge.(i) With white enenal paint. (Excluding GST)	51.86	Sqm	66.10	Rupees Sixty Six and Paise Ten Only	Per Square Meter	3428.00
15	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade (i) Old work (one or more coats) including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	173.00	Sqm	55.08	Rupees Fifty Five and Paise Eight Only	Per Square Meter	9530.00
16	Removing dry or oil bound distemper, water proofing cement paint and the like By scrapping and sand papering the wall surface smooth including necessary repairs to scratches complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	103.80	Sqm	10.17	Rupees Ten and Paise Sixteen Only	Per Square Metre	1056.00
17	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	43.25	Sqm	59.32	Rupees Fifty Nine and Paise Thirty Two Only	Per Square Meter	2566.00
18	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i) One or more coats on old work (Excluding GST)	80.00	Sqm	63.56	Rupees Sixty Three and Paise Fifty Five Only	Per Square Meter	5085.00

19	Finishing wall with weather proof exterior grade emulsion of approved design Apexultima) or its equarled on undecorated wall surfaces (two coats) to give an even shade and final finish after thoroughly cleaning the surface to remove all dirt, dust and other foreign matter etc including sand paper smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	5.00	Sqm	76.27	Rupees Seventy Six and Paise Twenty Seven Only	Per Square Meter	381.00
20	Repair to plaster in patches of 2.50 square meter under and upto 10 to 15mm thick including cutting the patch in proper shape and re-plastering the surface of wall including disposal to the dumping ground with a lead of 20 metres with including carriage of mateirals in all leads and lifts as per directions of the Engineer-in-Charge. (i) Cement Mortar 1:5(One cement: Five sand). (Excluding GST)	0.72	Sqm	254.24	Rupees Two Hundred Fifty Four and Paise Twenty Three Only	Per Square Meter	183.00
21	Providing and fixing Telescopic channel for Drawer /cupboard etc complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	2.00	Pair	762.71	Rupees Seven Hundred Sixty Two and Paise Seventy One Only	Per Pair	1525.00
						Total	83006.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

SRNO-575 T/S No 17362-63 Rs. 1,00,885/- Dt 19/9/26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
B & R Division Kasumpti
HPPWD Winter Field Shimla -3


SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 75,760.00		
Name of Work :- A/R & M/O Police Chowki Building, Kasumpti , Shimla-9- (SH:- Internal / External Painting in Police Chowki Building under Kasumpti Section.)					Earnest Money :- 1,600.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Finishing wall with weather proof exterior grade emulsion of approved design Apexultima) or its equarlied on undecorated wall surfaces (two coats) to give an even shade and final finish after throughly cleaning the surface to remove all dirt, dust and other foreign matter etc including sand paper smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	318.50	Sqm	76.27	Rupees Seventy Six and Paise Twenty Seven Only	Per Square Meter	24292.00
2	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade (i) Old work (one or more coats) including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	280.50	Sqm	46.61	Rupees Forty Six and Paise Sixty One Only	Per Square metre	13074.00
3	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	556.06	Sqm	10.17	Rupees Ten and Paise Sixteen Only	Per Square Meter	5655.00

4	Providing and applying white cement based putty of average thickness 1 mm. of approved brand and manufacturer. over the plastered wall surface to prepare the surface even and smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	150.82	Sqm	55.08	Rupees Fifty Five and Paise Eight Only	Per Square Meter	8308.00
5	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i) One or more coats on old work. (Excluding GST)	225.00	Sqm	55.08	Rupees Fifty Five and Paise Eight Only	Per Square Meter	12394.00
6	Repair to plaster in patches of 2.50 square meter under and upto 10 to 15mm thick including cutting the patch in proper shape and re-plastering the surface of wall including disposal to the dumping ground with a lead of 20 metres with including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) Cement Mortar 1:5(One cement: Five sand). (Excluding GST)	2.88	Sqm	254.24	Rupees Two Hundred Fifty Four and Paise Twenty Three Only	Per Square Meter	732.00
7	Providing and Fixing Scaffolding in building side including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) One or more coats on old work. (Excluding GST)	91.50	Sqm.	101.69	Rupees One Hundred One and Paise Sixty Nine Only	Per Square Metre	9305.00
8	Disposal of muck /denris/ excavated earth upto site approved by Municipal Corporation surrounding Shimla upto all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	3.63	Cum	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Per Cubic Metre	2000.00
						Total	75760.00

	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer,
 B& R Division Kasumpti
 IIPPWD Winter Field Shimla -3

456

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-					Estimated Cost:- 75,760.00		
Name of Work :- A/R & M/O Police Chowki Building, Kasumpti , Shimla-9- (SH:- Internal / External Painting in Police Chowki Building under Kasumpti Section.)					Earnest Money :- 1,600.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Finishing wall with weather proof exterior grade emulsion of approved design Apexultima) or its equarled on undecorated wall surfaces (two coats) to give an even shade and final finish after thoroughly cleaning the surface to remove all dirt, dust and other foreign matter etc including sand paper smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	318.50	Sqm	76.27	Rupees Seventy Six and Paise Twenty Seven Only	Per Square Meter	24292.00
2	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade (i) Old work (one or more coats) including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	280.50	Sqm	46.61	Rupees Forty Six and Paise Sixty One Only	Per Square metre	13074.00
3	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	556.06	Sqm	10.17	Rupees Ten and Paise Sixteen Only	Per Square Meter	5655.00

4	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	150.82	Sqm	55.08	Rupees Fifty Five and Paise Eight Only	Per Square Meter	8308.00
5	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i) One or more coats on old work. (Excluding GST)	225.00	Sqm	55.08	Rupees Fifty Five and Paise Eight Only	Per Square Meter	12394.00
6	Repair to plaster in patches of 2.50 square meter under and upto 10 to 15mm thick including cutting the patch in proper shape and re-plastering the surface of wall including disposal to the dumping ground with a lead of 20 metres with including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) Cement Mortar 1:5(One cement: Five sand). (Excluding GST)	2.88	Sqm	254.24	Rupees Two Hundred Fifty Four and Paise Twenty Three Only	Per Square Meter	732.00
7	Providing and Fixing Scaffolding in building side including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) One or more coats on old work. (Excluding GST)	91.50	Sqm.	101.69	Rupees One Hundred One and Paise Sixty Nine Only	Per Square Metre	9305.00

8	Disposal of muck /denris/ excavated earth upto site approved by Municipal Corporation surrounding Shimla upto all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	3.63	Cum	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Per Cubic Metre	2000.00
	Quoted rates Percentage in figures					Total	75760.00
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

DNIT approved for Rs.75,760 /- Only vide DNIT Register Sr.No.456 the financial year 2026- 2027 TS no.14879-80 Date..... Amount - Rs. 92,078 /- 13/8/26

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 4,21,999.00		
Name of Work :-- Restoration of Rain damages on Eversunny to Pagog road Km.0/00 to 5/000 (SH:-C/O unlined drain, Maintenance of earthen shoulder and Hume pipe culvert removal of land slides etc. at various Rds.) (UNDER PDNA)(Excluding GST)					Earnest Money :- 8500.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Construction of unlined surface drains of average X-section area 0.40 sqm in ordinary rocks to specified lines, grades, levels and dimensions as per approved design amend technical specification clause 304 excavated material to be used in embankments at site including carriage of materials in all leads and lifts as per direction of the Engineer-in-Charge. (Mechanical Means).(Excluding GST)	3500.00	Rmt	25.42	Rupees Twenty Five and Paise Forty Two Only	Per Cubic Metre	88970.00
2	Maintenance of Earthen shoulder(stripping of excess soil) Stripping excess soil from the shoulder surface to achieve the approved level and compacting with plate compactor at OMC as per drawings and Technical Specification Clause 1903 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(Excluding GST)	2920.00	Sqm	35.85	Rupees Thirty Five and Paise Eighty Five Only	Per Cubic Metre	104682.00
3	Maintenance of Hume pipe culvert by way of cleaning, Erosion repair to cracks parapets wall and protection work as per drawing and technical specification Clause 1908 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	5.00	Nos	1949.15	Rupees One Thousand Nine Hundred Forty Nine and Paise Fifteen Only	Per Kilogram	9746.00
4	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material within all leads and lifts as per technical specification 302.3.5 and 1611 as per directions of the Engineer-in-Charge. (Excluding GST)	859.82	cum	254.24	Rupees Two Hundred Fifty Four and Paise Twenty Four Only	Per Square Metre	218601.00
	Quoted rates Percentage in figures					Total	421999.00
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
B & R Division Kasumpti
HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 3,86,878.00		
Name of Work :- Restoration of rain damages on Bhattkuffer koti road km.0/00 to 14/930. (SH:- Construction of Retaining wall with toe wall Rd.1/460 to1/471) . (Excluding GST)UNDER PDNA					Earnest Money :-7800.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	16.50	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	4544.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required).All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	19.36	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	6563.00

SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 3,86,878.00		
Name of Work :- Restoration of rain damages on Bhattkuffer koti road km.0/00 to 14/930. (SH:-					Earnest Money :-7800.00		
Construction of Retaining wall with toe wall Rd.1/460 to1/471) . (Excluding GST)UNDER PDNA					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate	Unit	Amount	
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	16.50	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	4544.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required).All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	19.36	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	6563.00

SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,					Estimated Cost:- 4,23,719.00		
Name of Work :- Restoration of rain damages on Bhattkuffer koti road km.0/00 to 14/930.					Earnest Money :-8500.00		
(SH:- Removal of Slips various Rds and miscellaneous work Tipra to Jagroti road km. 0/00 to 6/00. (Excluding GST) UNDER PDNA					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	The maintenance of drains include erosion, repair, clearing, reshaping, regarding, deepening of side drains as well as catch water drains as per technical specification Clause 1907 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(Excluding GST)	5800.00	Rmt	3.90	Rupees Three and Paise Eighty Nine Only	Per Running meter	22610.00
2	Cutting of branches of trees shrubs and trimming of grass and weeds from the shoulders/ berms and disposing off the same to suitable locations as per technical specifications Clause 1914 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge..(Excluding GST)	14210.00	Sqm	3.39	Rupees Three and Paise Thirty Eight Only	Per Square Metre	48169.00
3	Maintenance of Earthen shoulder(stripping of excess soil) Stripping excess soil from the shoulder surface to achieve the approved level and compacting with plate compactor at OMC as per drawings and Technical Specification Clause 1903 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge..(Excluding GST)	6670.00	Sqm	35.84	Rupees Thirty Five and Paise Eighty Three Only	Per Square Metre	239046.00
4	Maintenance of Hume pipe culvert by way of cleaning, Erosion repair to cracks parapets wall and protection work as per drawing and technical specification Clause 1908 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge..(Excluding GST)	10.00	No	1930.51	Rupees One Thousand Nine Hundred Thirty and Paise Fifty Only	Each	19305.00
5	White washing two coats on parapets wall and tree trunks including preparation of surface by cleaning scraping etc. as per technical specification clause 1915 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge..(Excluding GST)	3045.00	Sqm	24.92	Rupees Twenty Four and Paise Ninety One Only	Per Square Metre	75867.00

6	Removal of land slides/slip clearance. Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal responsibility by the contractor with all leads & lift. . The work shall be executed as per the	63.12	Cum	296.61	Rupees Two Hundred Ninety Six and Paise Sixty One Only	Per Cubic Meter	18722.00
	Quoted rates Percentage in figures					Total	423719.00
	Quoted rates Percentage in words						
						G.Total	

SR No-571 T/S 17352-53 Rs. 5,14,988/- D+16-9-26

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to

Executive Engineer
B&R Division Kasumpti,
HPPWD, Winter Field Shimla-3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,					Estimated Cost:- 83,644.00		
NAME OF WORK:- A/R & M/O on Various roads Junga section under Junga Sub Division					Earnest Money :-1,700.00		
(SH:- Supplying and Stacking Pot seal bags cold mix in Various Rds).					Time:- One Month		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount Excluding GST
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	94.00	Nos	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three Only	Per Each	83644.00
						Total	83644.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						

SR/VO-581 T/SNO-17447-48 R3.101661/- Dt 18/9/2026

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,					Estimated Cost:- 80,975.00		
NAME OF WORK:- /R & M/O on Various roads Baldiyan section under Sub Division Mashobra(SH:- Supplying and Stacking Pot seal bags cold mix in Various Rds).					Earnest Money :-1,700.00		
					Time:- One Month		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount Excluding GST
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix But Excluding GST. including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	91.00	Nos	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three Only	Per Each	80975.00
						Total	80975.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						

SR NO-582 T/S NO 17449-50 RS-98417/D+ 18/9/2026

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
HPPWD Division,
Kasumpti Shimla


SCHEDULE OF QUANTITY						
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,				Estimated Cost:- 81,664.00		
NAME OF WORK:- A/R & M/O on Various roads Mashobra section under Sub Division ~~Kasumpti~~				Earnest Money :-1,700.00		
(SH:- Supplying and Stacking Pot seal bags cold mix in Various Rds).				Time:- One Month		
Sr. No	Description of Work / Item (S)	No. of Qty.		Estimated Rate		Unit
				In figures	In words	
1	Supplying and laying pot seal beg of 25 kgs cold mix But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	92.00	Nos	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three Only	Per Each
	Quoted rates Percentage in figures					Total
	Quoted rates Percentage in words					81864.00

SR No-583 T/S No- 17451-52 RA- 98498/- D+18/9/2026

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
HPPWD Division,
Kasumpti Shimla



SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,					Estimated Cost:- 82,754.00		
NAME OF WORK:- A A/R & M/O on Various roads Bharari section under Sub Division No.1					Earnest Money :-1,700.00		
(SH:- Supplying and Stacking Pot seal bags cold mix in Various Rds).					Time:- One Month		
Sr. No	Description of Work / Item (S)	No. of Qty.		Estimated Rate		Unit	Amount Excluding GST
				In figures	In words		
1	Supplying and laying pot seal beg of 25 kgs cold mix But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge .	93.00	Nos	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three	Per Each	82754.00
	Quoted rates Percentage in figures					Total	82754.00
	Quoted rates Percentage in words						

SRNO-584 T/SNO-17436-37 Rs. 100579/- D+18-9-2026

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.							
SCHEDULE OF QUANTITY							
Name of Work :- A/R & M/O various Residential Qtrs at Kasumpti, Shimla-9 . (SH:- Providing and Fixing Glass pans ,vanity & one piece sheat etc in Type-V Set no. 15 at Kasumpti Shimla .) (Excluding GST)				Estimated Cost:- 84,563.00			
				Earnest Money :- 1,700.00			
				Time:- One Month.			
Sr. No	Description of Work / Item (S)	No. of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty (i) Float glass panes of nominal thickness 4 mm including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i) Frosted glass 4 mm thick . (weight not less than 10kg/sqm) (Excluding GST)	17.32	Sqm	779.66	Rupees Seven Hundred Seventy Nine and Paise Sixty Six Only	Per Square Meter	13504.00
2	Providing and fixing Vanity HDHMR with S.S 304 hinges with wash basin and cp waste, including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	3.00	Nos.	18008.47	Rupees Eighteen Thousand Eight and Paise Forty Seven Only	Each	54025.00
3	Providing and fixing one piece water closet oval shaped white, including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. MAKE Hinderware for equivalents.(Excluding GST)	1.00	Nos.	17033.90	Rupees Seventeen Thousand Thirty Three and Paise Eighty Nine Only	Each	17034.00
	Quoted rates Percentage in figures					Total	84563.00
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

R No. 532 T/ SN. 16474-75 ch 39 Ro 102,778/-

Executive Engineer,
B & R Division Kasumpti
HPPWD Winter Field Shimla -3