

Himachal Pradesh
Public Works Department

No. PW-KD- CTR- Tender-NIT/2026-2027-

19478-79

Dated:-

7/10/28

To


The Executive Engineer (IT Cell)
Nigam Vihar Shimla.

Subject :- Publication of Tender Notice.

Jai Hind


Enclosed please find herewith the tender Notice of work as given in the Notice Inviting tender for uploading on department website as per notification Pr. Secy. (PW) to the Govt. of Himachal Pradesh letter No. PBW (B)A(3)1/2024 dated Shimla-2 the 03-01-2024 and PWD-B-A0(3)/8/2025- 300858 dated 09-10-2025 as the works mentioned in the tender notice are urgent in nature and in public interest.

DA:- Notice Inviting Tender & Schedule of Quantity and Certificate.


Executive Engineer,
HPPWD., Division Kasumpti
Shimla.

Copy forwarded to for further necessary action please.

1. The Superintending Engineer 4th Circle HPPWD Shimla .



Executive Engineer,
HPPWD., Division Kasumpti
Shimla.

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDERS**

Executive Engineer B&R Division Kasumpti HPPWD Shimla for the following works on behalf of the Government of Himachal Pradesh from the eligible contractors enlisted in HPPWD, so as to reach in the office as per time schedule given below:-

- | | |
|--|-----------------------------------|
| 1. Date of receipt of application for tender forms:- | 14-10-2026 10:00 AM upto 12:00 PM |
| 2. Dated of Issue /sale of tender forms:- | 14-10-2026 12:00 PM upto 4:00 PM |
| 3. Date of receipt of tender:- | 15-10-2026 .up to 10:30 AM |
| 4. Date of opening of tender:- | 15-10-2026 up to 11:00 AM |

Sr. No.	Name of Work	Estimated cost	EMD(Rs.)	Cost of Tender (Rs.)	Time Limit	Eligible class of Contractor
1	A/R & M/O various roads under AIMSS section (SH:- Providing staff for maintenance of various AIMSS section for the year w.e.f. 15.10.2026 to 14.11.2026. (Excluding GST).	84574/-	1700/-	350	30 days	Class-D
2	Restoration of fain damages on various roads under Junga section (SH:- Removal of slips) (Under PDNA)(Excluding GST).	348999	7000/-	350/-	30 days	Class-D
3	Restoration of rain damages Eversunny to Golcha Bhont road Km. 0/000 to 6/270(SH:- C/O PCC. Retaining wall RD. 2/030 to 2/038) (Excluding GST) (Under PDNA).	364298/-	7300/-	350/-	30 days	Class-D
4	Restoration of rain damages various roads under AIMSS Section (SH:- Removal of slips various RDs between)(Excluding GST)(Under PDNA).	62917/-	1300/-	350/-	30 days	Class-D
5	Restoration of rain damages Eversunny to Golcha Bhont road Km. 0/000 to 6/270(SH:- C/O PCC. Retaining wall RD. 3/045 to 3/057) (Excluding GST) (Under PDNA).	387594/-	7800/-	350/-	30 days	Class-D
6	A/R & M/O on Elsyium Devidhar road Km. 0/000 to 8/00 (SH:- C/O PCC. Retaining wall RD. 6/105 to 6/120) (Excluding GST) (Under PDNA).	394688/-	7900/-	350/-	30 days	Class-D
7	Restoration of rain Damages on Upper Shakti Vihar Road Km. 0/000 to 0/275(SH:- C/O R/Wall between RD. 0/240 to 0/250 under Parimahal Section) (Under PDNA) (Excluding GST).	422787/-	8500/-	350/-	30 days	Class-D
8	Restoration of rain Damages on Upper Shakti Vihar Road Km. 0/000 to 0/275(SH:- C/O R/Wall between RD. 0/230 to 0/240 under Parimahal Section) (Under PDNA) (Excluding GST).	422965/-	8600/-	350/-	30 days	Class-D
9	Restoration of rain Damages on Upper Shakti Vihar Road Km. 0/000 to 0/275(SH:- C/O R/Wall between RD. 0/210 to 0/220 under Parimahal Section) (Under PDNA) (Excluding GST).	422286/-	8500/-	350/-	30 days	Class-D
10	Restoration of rain damages on Baldeyan to Shenal road Km. 0/0000 to 4/220 (SH:- C/O Retaining wall at RD 2/945 to 2/956) (Under PDNA) (Excluding GST).	403309/-	8100/-	350/-	30 days	Class-D
11	Restoration of rain damages on Baldeyan to Shenal road Km. 0/0000 to 4/220 (SH:- C/O Retaining wall at RD 2/540 to 2/553.50) (Under PDNA) (Excluding GST).	407712/-	8200/-	350/-	30 days	Class-D
12	Restoration of rain damages on Shimla to Mandi road Km. 6/00 to 22/000 (SH:- C/O R/Wall between RD 21/045 to 21/056) (Under PDNA) (Excluding GST).	409025/-	8200/-	350	30 days	Class-D
13	Restoration of rain damages on Shimla to Mandi road Km. 6/00 to 22/000 (SH:- C/O R/Wall between RD 21/060 to 21/073.50) (Under PDNA) (Excluding GST).	407543/-	8200/-	350	30 days	Class-D
14	Restoration of rain damages on Shoghi Mehli Junga Sadhupul road Km. 12/375 to 48/925 (SH:- Removal of slips in between RD 39/000 to 48/925) (Under PDNA).	403553/-	8100/-	350/-	30 days	Class-D
15	A/R & M/O Koti to Satlai Km. 0/000 to 4/120 (SH:- Preparation of FRA case in all respect) (Excluding GST).	59322/-	1200/-	350	30 days	Class-D
16	A/R & M/O on Juggar to Bashashra road Km. 0/00 to 8/00 (SH:- Trimming of grass and cleaning of drains at RD 0/00 to 8/00) (Excluding GST).	84433/-	1700/-	350/-	30 days	Class-D
17	A/R & M/O on Juggar to Bashashra road Km. 0/00 to 8/00 (SH:- Removal of Slip/ Road Side Muck between RD 0/00 8/00) (Excluding GST).	83644/-	1700/-	350/-	30 days	Class-D
18	A/R & M/O Koti to Satlai road (Sub-Head) C/O Link road from Chilhar to Jhandi G.P Satlai Km. 0/000 to 1/900 (SH:- Preparation of FRA case in all respect) (Excluding GST).	59322/-	1200/-	350 days	30 days	Class-D
19	A/R & M/O various Type-I to Type VI Qtrs. of GAD at Kasumpti Shimla-9 (SH:- Repair work in Type-I Set No. 632 New Shimla Type-II Set No. 8 Dhalli under Kasumpti Section) (Excluding GST).	84324/-	1700/-	350/-	30 days	Class-D
20	A/R & M/O Various Type-I & Type-VI GAD at Parimahal kasumpti Shimla-9 (SH:- Repair work in Type-III set No. 42 under Parimahal Section). (Excluding GST)	83315/-	1700/-	350 days	30 days	Class-D



21	Annual Repair and Maintenance on Shiv Mandir to Shakti Bihar km. 0/00 to 1/500 (SH:- Providing and fixing Crash Barrier W-Beam High intensity reflector in kilometer 0/400 to 0/670 (Without GST).	83325/-	1700/-	350/-	30 days	Class-D
22	Annual Repair and Maintenance on Shiv Mandir to Shakti Bihar km. 0/00 to 1/500 (SH:- Providing and fixing crash Barrier W-Beam high intensity reflector in kilometer 0/120 to 0/370 (without GST).	84398/-	1700/-	350 days	30 days	Class-D

It is certified that the above works are required to be carried out immediately being emergent nature of work in public interest.

The tender documents shall be issued only to those contractor/Firm who fulfill the following documents with the application.

1. The valid enlistment/Registration of contractor in Appropriate Class.
2. Permanent account No. (PAN NO).
3. G.S.T No.
4. Earnest Money in the shape of National saving certificate/time deposit account in the any of the post office in HP. F.D.R from any Nationalized Bank duly pleaded in favour of the Executive Engineer Division Kasumpti HPPWD Shimla.
5. The earnest & cost of tender form for the above works should be submitted with the application for the purchase of the tender form. The application received without earnest money & cost of tender form shall summarily be rejected.
6. The officer of the tender shall remain valid up to 75 days after the opening of tender.
7. Ambiguous/telephonic /conditional tenders or tender by fax/E mail shall not be considered and will be summarily be rejected.
8. Executive Engineer reserve the right to reject or cancel any or all tenders without assigning any reasons.
9. If the date given above happens to be holiday the same shall be processed on next working day.
10. The Contractor/firms must quote their rates in words as well as in figures failing which EXN reserve the right to accept/reject any or all tenders.
11. The tender forms shall not be issued to those contractors/firms whose previous performance is not found satisfactory and who have not executed the previous awarded works within the stipulated period of completion.
12. One contractor shall not have more than two major works in hand at a time.
13. Work should be completed by the contractor within stipulated period.

Executive Engineer,
Division Kasumpti.,
HPPWD. Shimla-3.

Dated :- 7/10/20

No.PW-SD-I/CB-Tender/2026-2027-

Copy forwarded to:-

1. Copy to the Deputy Commissioner Shimla Distt. Shimla.
2. Copy to the Executive Engineer Shimla Division No-III HPPWD Shimla.
3. Copy to the Sub Divisional Magistrate (U) Shimla.
4. Copy to the Sub Divisional Magistrate (R) Shimla.
5. Copy to Municipal committee Shimla Distt. Shimla.
6. Copy to Block Development officer Mashobra Distt. Shimla.
7. All the Assistant Engineers under this Division, HPPWD Shimla-3.
8. Superintendent / HDM /DAO.
9. Notice Board.

Executive Engineer,
Division Kasumpti.,
HPPWD. Shimla.


SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,						Estimated Cost:-84,574.00	
Name of Work :- --A/R & M/O various roads under AIMSS section .(SH:- Providing Staff for maintenance of various AIMSS section for the year w.e.f. 15.10.2026 to 14.11.2026.(Excluding GST)						Earnest Money :1700.00	
						Time:- one Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Engagement of 5 Nos. Beldar for any of duties assigned by Junior Engineer unskilled jobs such as earth work, carriage of material cleaning and washing of areas, assisting plumber carpenter etc cutting of grass and other misclenious works assigned by Junior Engineer.(Six No. Beldar)T&P, will be supplied by the department as per the direction of the Engineer-in-Charge..(Excluding GST) w.e.f. 15.10.2026 to 15.11.2026.	145.00	Days	583.27	Rupees Five Hundred Eighty Three and Paise Twenty Seven Only	Per Days	84574.00
						Total	84574.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

SR No- 710

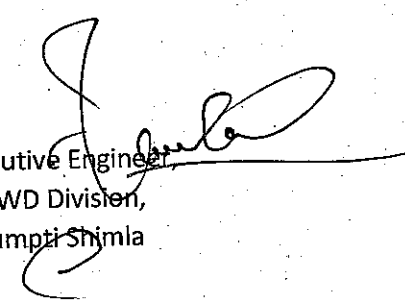
CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer,
 B&R Division Kasumpti,
 HPPWD, Winter Field Shimla-3

SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA						Estimated Cost:- 3,48,999.00	
Name of Work :- Restoration of Rain damages on Various roads under Junga Section (SH:-						Earnest Money :- 7,000.00	
Removal of slips).(Under PDNA)(Excluding GST).						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Removal of land slides/slip clearance. Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material as per technical specification 302.3.5 and 1611. But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	1372.77	Cum	254.23	Rupees Two Hundred Fifty Four and Paise Twenty Three Only	Per Cubic Meter	348999.00
						Total	348999.00


 Executive Engineer,
 HPPWD Division,
 Kasumpti Shimla


SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.						Estimated Cost:-3,64,298.00	
Name of Work :- Restoration of rain damages Eversunny to Golcha Bhont road Km 0/000 to6/270 (SH:- Construction of PCC. Retaining wall Rd.2/030 to 2/038) . (Excluding GST)UNDER PDNA						Earnest Money :7300.00	
						Time:- One Month.	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required).All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	17.16	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	5817.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate40 mm(Twenty milimetre) nominal size)..(Excluding GST)	93.20	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	347525.00

3	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (a) Granular material. .(Excluding GST)	5.44	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	5532.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. .(Excluding-GST)	32.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running meter	5424.00
						Total	364298.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer,
 B&R Division Kasumpti,
 HPPWD, Winter Field Shimla-3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,					Estimated Cost:-62,917.00		
Name of Work :- Restoration of rain damages various roads under AIMSS section (SH :-Removal of Slips various Rds Between) (Excluding GST))UNDER PDNA					Earnest Money :1300.00		
					Time:- One Month		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Removal of land slides/slip clearance. Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal responsibility by the contractor with all leads & lift. . The work shall be executed as per the direction of the Engineer-in-Charge. (Excluding GST)	212.12	Cum	296.61	Rupees Two Hundred Ninety Six and Paise	Per Cubic Meter	62917.00
						Total	62917.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
B&R Division Kasumpti,
HPPWD, Winter Field Shimla-3


SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.						Estimated Cost:-3,87,594.00	
Name of Work :- Restoration of rain damages Eversunny to Golcha Bhont road Km 0/000 to 6/270 (SH:-						Earnest Money :7800.00	
Construction of PCC. Retaining wall Rd.3/045 to 3/057) . (Excluding GST) UNDER PDNA						Time:- One Month.	
Sr. No	Description of Work / Item (S)	No. of Qty.		Estimated Rate		Unit	Amount
				In	In words		
1	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	15.64	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	5302.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate40 mm(Twenty milimetre) nominal size)..(Excluding GST)	99.12	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty	Per Cubic Metre	369600.00
3	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (a) Granular material. .(Excluding GST)	6.48	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	6590.00

4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	36.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running meter	6102.00
						Total	387594.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer,
 B&R Division Kasumpti,
 HPPWD, Winter Field Shimla-3

SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.						Estimated Cost:-3,94,688.00	
Name of Work :-- A/R & M/O On Elysiyum Devidhar road Km 0/000 to 8/00 (SH:- Construction of PCC. Retaining wall Rd.6/105 to 6/120) . (Excluding GST)UNDER PDNA						Earnest Money :7900.00	
						Time:- One Month.	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required).All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges.(Excluding GST)	19.08	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	6468.00
2	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate40 mm(Twenty milimetre) nominal size)..(Excluding GST)	102.00	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	380339.00

3	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (a) Granular material. .(Excluding GST)	5.25	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	5339.00
4	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. .(Excluding GST)	15.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running meter	2542.00
						Total	394688.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

SR No-706

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
B&R Division Kasumpti,
HPPWD, Winter Field Shimla-3

761

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,						Estimated Cost:- 4,22,787.00	
Name of Work :- Restoration of rain damages on Upper Shakti Vihar Road Km 0/000 to 0/275. (SH:- C/O R/Wall between R.D 0/240 to 0/250 under Parimahal Section.) (Under PDNA) (Excluding GST)						Earnest Money :- 8,500.00	
						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Cutting in Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm (Thirty centimetre) in depth, 1.5 m (One point five metre) in width as well as 10 sqm (ten Square Metre) on plan) including getting out and disposal of excavated earth all lead and lift as directed by Engineer-in-charge and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required) Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (i)All kinds of soil. (Excluding GST)	22.80	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	6280.00

2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required).All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (Excluding GST)	21.10	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	7153.00
3	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 1:5:10 (One cement : five coarse sand) : ten graded stone aggregate 40 mm nominal size) (Excluding GST)	3.14	Cum	3220.34	Rupees Three Thousand Two Hundred Twenty and Paise Thirty Three Only	Per Cubic Metre	10112.00

4	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 1:3:6 (One cement : Three coarse sand) : Six graded stone aggregate 20 mm nominal size) (Excluding GST)	66.65	Cum	4915.25	Rupees Four Thousand Nine Hundred Fifteen and Paise Twenty Five Only	Per Cubic Metre	327602.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	16.20	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running Metre	2746.00
6	B/Filling with granuals as per specification to thicknesssize toward the soil and bigger size towards the wall , abutment , wing walls , return wall to the full length complete as per drawing and technical specification graded stone clause , including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	12.30	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	12508.00
7	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level including carriage of materials in all leads and lifts as per directions of the Engineer-in-charge. (i) Mild steel and Medium Tensile steel bars (Excluding GST)	100.00	Kgs.	93.22	Rupees Ninety Three and Paise Twenty Two Only	Per Kilogram	9322.00
8	Disposal of excavated earth work by debris material upto site on approved dumping siteapproved by M.C. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	44.90	Cum	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Per Cubic Metre	24733.00

9	Square masonry Random rubble masonry/polygonal rubble masonry(un-coursed/brought to courses) with hard stone of approved quality in foundation and plinth including leveling up with cement concrete 1:6:12 (One cement:Six sand:twelve graded stone aggregate 20mm (twenty milimetre)nominal size) in cement mortar 1:6 (One cement: Six sand) in breast wall and retaining walls including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	4.25	Cum	5254.24	Rupees Five Thousand Two Hundred Fifty Four and Paise Twenty Three Only	Per Cubic Metre	22331.00
						Total	422787.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G. Total	

SR No- 701

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

698

DRAFT SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,					Estimated Cost:- 4,22,965.00		
Name of Work :- Restoration of rain damages on Upper Shakti Vihar Road Km 0/000 to 0/275. (SH:-					Earnest Money :- 8,600.00		
C/O R/Wall between R.D 0/230 to 0/240 under Parimahal Section.) (Under PDNA) (Excluding GST)					Time:- One Month		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Cutting in Earth work in excavation by mechanical means (Hydraulic excavator/manual means over areas (exceeding 30 cm (Thirty centimetre) in depth, 1.5 m (One point five metre) in width as well as 10 sqm (ten Square Metre) on plan) including getting out and disposal of excavated earth all lead and lift as directed by Engineer-in-charge and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required) Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (i)All kinds of soil. (Excluding GST)	25.60	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	7051.00

2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required).All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (Excluding GST)	23.70	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	8034.00
3	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 1:5:10 (One cement : five coarse sand) : ten graded stone aggregate 40 mm nominal size) (Excluding GST)	3.14	Cum	3220.34	Rupees Three Thousand Two Hundred Twenty and Paise Thirty Three Only	Per Cubic Metre	10112.00

4	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 1:3:6 (One cement : Three coarse sand) : Six graded stone aggregate 20 mm nominal size) (Excluding GST)	66.05	Cum	4915.25	Rupees Four Thousand Nine Hundred Fifteen and Paise Twenty Five Only	Per Cubic Metre	324653.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	16.20	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running Metre	2746.00
6	B/Filling with granuals as per specification to thicknesssize toward the soil and bigger size towards the wall , abutment , wing walls , return wall to the full length complete as per drawing and technical specification graded stone clause , including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	11.60	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	11797.00
7	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level including carriage of materials in all leads and lifts as per directions of the Engineer-in-charge. (i) Mild steel and Medium Tensile steel bars (Excluding GST)	100.00	Kgs.	93.22	Rupees Ninety Three and Paise Twenty Two Only	Per Kilogram	9322.00
8	Disposal of excavated earth work by debris material upto site on approved dumping siteapproved by M.C. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	50.30	Cum	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Per Cubic Metre	27708.00

9	Square masonry Random rubble masonry/polygonal rubble masonry(un-coursed/brought to courses) with hard stone of approved quality in foundation and plinth including leveling up with cement concrete 1:6:12 (One cement:Six sand:twelve graded stone aggregate 20mm (twenty milimetre)nominal size) in cement mortar 1:6 (One cement: Six sand) in breast wall and retaining walls including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	4.10	Cum	5254.24	Rupees Five Thousand Two Hundred Fifty Four and Paise Twenty Three Only	Per Cubic Metre	21542.00
						Total	422965.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G. Total	

CONDITION:-

DNIT approved for Rs. 4,22,965 /- Only vide DNIT Register Sr.No. ⁶⁹⁸ the financial year 2026-27.T/S NO.....DATE.....AMT 5,14,072 /- only

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

702

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,					Estimated Cost:- 4,22,286.00		
Name of Work :- Restoration of rain damages on Upper Shakti Vihar Road Km 0/000 to 0/275. (SH:- C/O R/Wall between R.D 0/210 to 0/220 under Parimahal Section.) (Under PDNA) (Excluding GST)					Earnest Money :- 8,500.00		
					Time:- One Month		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting in Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm (Thirty centimetre) in depth, 1.5 m (One point five metre) in width as well as 10 sqm (ten Square Metre) on plan) including getting out and disposal of excavated earth all lead and lift as directed by Engineer-in-charge and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required) Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (i)All kinds of soil. (Excluding GST)	31.40	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	8648.00

2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required).All useful material such as stones, shingles aggregate and slates shall be properly stacked at site to the maximum possible extent in all leads and lifts through all modes of transportation the usefull stones as per the direction of the Engineer-in-Charge. Any loss to the public and private propriety during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects including all incidental charges. (Excluding GST)	20.60	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	6983.00
3	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 1:5:10 (One cement : five coarse sand) : ten graded stone aggregate 40 mm nominal size) (Excluding GST)	3.14	Cum	3220.34	Rupees Three Thousand Two Hundred Twenty and Paise Thirty Three Only	Per Cubic Metre	10112.00

4	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 1:3:6 (One cement : Three coarse sand) : Six graded stone aggregate 20 mm nominal size) (Excluding GST)	64.00	Cum	4915.25	Rupees Four Thousand Nine Hundred Fifteen and Paise Twenty Five Only	Per Cubic Metre	314576.00
5	Providing weapholes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	16.20	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Running Metre	2746.00
6	B/Filling with granuals as per specification to thicknesssize toward the soil and bigger size towards the wall , abutment , wing walls , return wall to the full length complete as per drawing and technical specification graded stone clause , including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	12.90	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	13119.00
7	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level including carriage of materials in all leads and lifts as per directions of the Engineer-in-charge. (i) Mild steel and Medium Tensile steel bars (Excluding GST)	100.00	Kgs.	93.22	Rupees Ninety Three and Paise Twenty Two Only	Per Kilogram	9322.00
8	Disposal of excavated earth work by debris material upto site on approved dumping siteapproved by M.C. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	53.00	Cum	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Per Cubic Metre	29195.00

9	Square masonry Random rubble masonry/polygonal rubble masonry(un-coursed/brought to courses) with hard stone of approved quality in foundation and plinth including leveling up with cement concrete 1:6:12 (One cement:Six sand:twelve graded stone aggregate 20mm (twenty milimetre)nominal size) in cement mortar 1:6 (One cement: Six sand) in breast wall and retaining walls including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	5.25	Cum	5254.24	Rupees Five Thousand Two Hundred Fifty Four and Paise Twenty Three Only	Per Cubic Metre	27585.00
						Total	422286.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G. Total	

SR NO-702

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.						Estimated Cost:- 403309.00	
Name of Work :- Restoration of rain damages on Baldeyan to Shenal road Km 0/0000 to 4/220 (SH:-						Earnest Money :- 8100.00	
Construction of Retaining Wall at Rd 2/945 to 2/956). (Under PDNA)(Excluding GST).						Time:- Two Month.	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	41.00	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	11292.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	9.00	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	3051.00

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . (a) Cement Mortar 1:6:12 (One cement: six sand: Twelve graded stone agg.40mm nominal size).	9.00	Cum	2881.36	Rupees Two Thousand Eight Hundred Eighty One and Paise Thirty Five Only	Per Cubic Metre	25932.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203.But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge (a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate40 mm(forty milimetre) nominal size).	93.95	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	350322.00
5	Providing weep holes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	27.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Runing metre	4576.00
6	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.(a) Granular material.	8.00	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	8136.00
					Total		403309.00

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.	Estimated Cost:- 407712.00
Name of Work :- Restoration of rain damages on Baldeyan to Shenal road Km 0/0000 to 4/220 (SH:-	Earnest Money :- 8200.00
Construction of R/Wall between Rd 2/540 to 2/553.50). (Under PDNA)(Excluding GST).	Time:- Two Month.

Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	52.00	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	14322.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	10.00	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	3390.00
3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . (a) Cement Mortar 1:6:12 (One cement: six sand: Twelve graded stone agg.40mm nominal size).	10.00	Cum	2881.36	Rupees Two Thousand Eight Hundred Eighty One and Paise Thirty Five Only	Per Cubic Metre	28814.00

4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203.But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge (a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate40 mm(forty milimetre) nominal size).	94.00	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	350508.00
5	Providing weep holes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	27.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Runing metre	4576.00
6	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.(a) Granular material.	6.00	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	6102.00
					Total		407712.00

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla


SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.W.D., SHIMLA-3.						Estimated Cost:- 409025.00	
Name of Work :- Restoration of rain damages on Shimla to Mandi road Km 6/00 to 22/000 (SH:-						Earnest Money :- 8200.00	
Construction of R/Wall between Rd 21/045 to 21/056). (Under PDNA)(Excluding GST).						Time:- Two Month.	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	34.00	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	9364.00
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	4.00	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	1356.00

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . (a) Cement Mortar 1:6:12 (One cement: six sand: Twelve graded stone agg.40mm nominal size).	4.00	Cum	2881.36	Rupees Two Thousand Eight Hundred Eighty One and Paise Thirty Five Only	Per Cubic Metre	11525.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203.But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge (a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate40 mm(forty milimetre) nominal size).	99.00	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	369153.00
5	Providing weep holes in brick masonry / stone masonry /plain, reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	20.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Runing metre	3390.00
6	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.(a).Granular material.	14.00	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	14237.00
					Total		409025.00

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars


 Executive Engineer,
 HPPWD Division,
 Kasumpti Shimla

695

SCHEDULE OF QUANTITY								
Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.						Estimated Cost:- 407543.00		
Name of Work :- Restoration of rain damages on Shimla to Mandi road Km 6/00 to 22/000 (SH:-						Earnest Money :- 8200.00		
Construction of R/Wall between Rd 21/060 to 21/073.50). (Under PDNA)(Excluding GST).						Time:- Two Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)	
				In figures	In words			
1	Cutting and disposal of earth work in by mechanical in all heights and depths in all kinds of soils, including saturated soils comprising of pick work, jumper work and blasting work both in soft and hard rock with chiseling and wedging out of rock (where blasting is prohibited) and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site., according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site as per satisfaction of Engineer- in -charge through all modes of transportation including head load ,animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical means and labour (if required). All the surplus excavated earth to be dumped at dumping site(dumping sites will be arranged by the contractor on his own cost). Any loss to the public and private propriety, human being, machinery during the course of execution and disposal of serviceable and unserviceable materials shall be the absolute responsibility of the contractor and shall have to be duly compensated by him in all respects But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	44.00	Cum	275.42	Rupees Two Hundred Seventy Five and Paise Forty Two Only	Per Cubic Metre	12119.00	
2	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and back filling with approved material. Hard Roack blasting prohibited and their intermediate classification of soils including, dewatering wherever required, setting of to the required lines, levels as shown on the drawing and directed by the Engineer -in-charge at site, according to the HP.PWD. specification of 1990 (one thousand nine hundred ninety) volume-I (one) and sorting out useful and unuseful material and transportation of the unuseful material for disposing at dumping site (To be arranged by the contractor) including payment of prescribed charges of dumping to the owner of dumping site as per satisfaction of Engineer-in-Charge through all modes of transportation including head load, animal load or mechanical means along with its leveling fine dressing and with all kinds of labour, machineries, tools equipments and safety measures and incidentals necessary to complete the work by mechanical But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	10.00	Cum	338.98	Rupees Three Hundred Thirty Eight and Paise Ninety Eight Only	Per Cubic Metre	3390.00	

3	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203 .But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge . (a) Cement Mortar 1:6:12 (One cement: six sand: Twelve graded stone agg.40mm nominal size).	10.00	Cum	2881.36	Rupees Two Thousand Eight Hundred Eighty One and Paise Thirty Five Only	Per Cubic Metre	28814.00
4	Providing and laying concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clauses 802,803,1202 and 1203.But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.as per direction of Engineer-In-Charge (a) Cement Mortar 1:4:8(One cement:Four sand:Eight graded stone aggregate40 mm(forty milimetre) nominal size).	94.00	Cum	3728.81	Rupees Three Thousand Seven Hundred Twenty Eight and Paise Eighty One Only	Per Cubic Metre	350508.00
5	Providing weep holes in brick masonry / stone masonry /plain reinforced concrete abutment, wing wall, return wall with 100 mm(One hundred milimetre) dia PVC pipe extending through the full with of the structures with slop of 1(v):20(H) towards drawing face complete as per drawing and technical specification clauses 614, 709, 1204.3.7 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	27.00	Rmt	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Per Runing metre	4576.00
6	Backfilling behind abutment, wing wall and return wall complete as per drawings and technical specification clause 1204.3.8 But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.(a) Granular material.	8.00	Cum	1016.95	Rupees One Thousand Sixteen and Paise Ninety Four Only	Per Cubic Metre	8136.00
					Total		407543.00

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer,
HPPWD Division,
Kasumpti/Shimla

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-					Estimated Cost:- 403553.00		
Name of Work :- Restoration of rain damages on Shoghi Mehli Junga Sadhupul road Km 12/375 to 48/925 (SH:- Removal of slips in between Rd 39/000 to 48/925).Under PDNA					Earnest Money :- 8,100.00		
					Time:- One Month		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Removal of land slides/slip clearance. Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in a lift upto 1.5 meter and land upto 1000 meter as per technical specification 302.3.5 and 1611. But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	1360.55	Cum	296.61	Rupees Two Hundred Ninety Six and Paise Sixty One Only	Per Cubic Meter	403553.00
						Total	403553.00

CONDITION:


1. All the P.O.L. Charges shall be borne by the contractor.
2. All the repair /maintenance of machineries shall be borne by the contractor.
3. For any minor /Major repair or any accident /damaged shall be the whole responsibility of contractor.
4. Any damages or loss to Govt./Private property during course of work shall have to be make good by the contractor.

Executive Engineer,
HPPWD Division,
Kasumpti Shimla

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,					Estimated Cost:- 59,322.00		
NAME OF WORK:- A/R & M/O Koti to Satlai road (Sub Head) C/o Link road from Satlai to Majhar					Earnest Money :- 1,200.00		
Kanchi G.P Satali Km 0/000 to 4/120 (SH:- Preparation of FRA case in all respect). (Excluding GST)					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Collecting the data from site for road preparation of Kml. File Digital with Co-ordinates , Topo sheet and SHP file with preparation of 3 folders complete in all respect up to final approval as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Per Case	59322.03	Rupees Fifty Nine Thousand Three Hundred Twenty Two and Paise Three Only	Per Case	59322.00
						Total	59322.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-


1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer,
 B& R Division-Kasumpti
 HPPWD, Winter Field Shimla -3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 84,433.00		
NAME OF WORK:- A/R & M/O on Juggar to Bashashra road km 0/00 to 8/00 (SH:-Trimming of glass and cleaning of drains at RD 0/00 to 8/00.) (Excluding GST)					Earnest Money :- 1,700.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Cutting of Branches of trees shrubs and trimming of glass and weeds Trimming of glass and weeds from the shoulder / berms and disposing off the same to suitable location as per technical specification Clause 1914. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	15400.00	Sqm	3.46	Rupees Three and Paise Forty Five Only	Per Square metre	53247.00
2	Maintenance of Drain The maintenance of drain include erosion , repair , clearing , cleaning, reshaping ,regarding , deepening of side drain as well as catch water drain as per technical specification Clause 1907. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	8000.00	Rmt	3.90	Rupees Three and Paise Eighty Nine Only	Per Running Metre	31186.00
						Total	84433.00
	Quated rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-


1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer,
 B& R Division Kasumpti
 HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 83,644.00		
NAME OF WORK:- Restoration of Rain Damages on Juggar to Bashashra road km 0/00 to 8/00 (SH: Removal of slip / Road side Muck between RD 0/00 to 8/00.) (Excluding GST)					Earnest Money :- 1,700.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Hiring of JCB excavator-cum-loader for removal of slip Debris and dressing of Beams including coat of fuel oil lubricants wages of operational staffs any repair package during operation will be carried out at his risk and cost at required location actual working will be accounted for payment and proper disposal slips/ debris by the contractor will be insured and dumping site will be arranged by the contractor at his own cost of tripper or carriage out as per instructions, including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	282.00	Cum	296.61	Rupees Two Hundred Ninety Six and Paise Sixty One Only	Per Cubic Metre	83644.00
						Total	83644.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-


1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standards.


 Executive Engineer,
 B& R Division Kasumpti
 HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D.,						Estimated Cost:- 59,322.00	
NAME OF WORK:- A/R & M/O Koti to Satlai road (Sub Head) C/o Link road from Chilhar to Jhandi						Earnest Money :- 1,200.00	
G.P Satlai Km 0/000 to 1/900 (SH:- Preparation of FRA case in all respect). (Excluding GST)						Time:- One Month.	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Collecting the data from site for road preparation of Kml. File Digital with Co-ordinates , Topo sheet and SHP file with preparation of 3 folders complete in all respect up to final approval as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Per Case	59322.03	Rupees Fifty Nine Thousand Three Hundred Twenty Two and Paise Three Only	Per Case	59322.00
						Total	59322.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.


 Executive Engineer,
 B& R Division Kasumpti
 HPPWD Winter Field Shimla -3

DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-I, H.P.P.W.D., SHIMLA-3.					Estimated Cost:- 84,324.00		
Name of Work :- A/R & M/O various Type-I & Type-VI Qtrs of GAD at Kasumpti, Shimla-9. (SH:-Repair work in Type-I Set no. 632 New Shimla, Type-II Set no. 8 Dhalli under Kasumpti Section) (Excluding GST)					Earnest Money :- 1,700.00		
					Time:- One Month.		
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Providing and fixing panelled glazed or shutters for doors windows and clerestory windows. Fixing with but hinges of required size with necessary screws, excluding panelling with will be paid for separately, all complete as per directions of the Engineer-in-Charge. (i) 35 mm thick (a) 2nd class deodar wood. (Excluding GST)	0.63	Sqm	3559.32	Rupees Three Thousand Five Hundred Fifty Nine and Paise Thirty Two Only	Per Square Metre	2242.00
2	Providing and fixing wire gauge shutters using galvanised M.S. wire gauge of I.S. gauge designation 85 G. with wire of dia 0.56 mm for doors windows and clerestorey windows including bright finished black enamelled iron hinges with necessary screws including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 40mm thick (a) 2nd class deodar wood (Excluding GST)	1.55	Sqm	3813.56	Rupees Three Thousand Eight Hundred Thirteen and Paise Fifty Five Only	Per square metre	5911.00
3	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 150x10mm (Excluding GST)	2.00	Nos.	84.75	Rupees Eighty Four and Paise Seventy Four Only	Each	169.00
3.1	(ii) 200x10 mm	2.00	Nos.	93.22	Rupees Ninety Three and Paise Twenty Two Only	Each	186.00

4	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 125 mm (Excluding GST)	2.00	Nos.	67.80	Rupees Sixty Seven and Paise Seventy Nine Only	Each	136.00
5	Providing and fixing bright finished brass hard drawn hooks and eyes including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 200 mm (Excluding GST)	2.00	Nos	59.32	Rupees Fifty Nine and Paise Thirty Two Only	Each	119.00
6	Providing and fixing 19mm thick water proof commercial board in shelves/shutters box for cup board with butt joints & fixing with nails & screws etc complete) including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	10.62	Sqm	1186.44	Rupees One Thousand One Hundred Eighty Six and Paise Forty Four Only	Per Square Meter	12600.00
7	Providing and fixing 19mm thick coloured or plain lamination sheet (sunmica) on boards/ply wood sheets with approved adhesive and nails etc. complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	4.32	Sqm	805.08	Rupees Eight Hundred Five and Paise Eight Only	Per Square meter	3478.00
8	Providing and fixing 1.00mm thick coloured or plain lamination sheet (sunmica) on boards/ply wood sheets with approved adhesive and nails etc complete including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	7.56	Sqm	762.71	Rupees Seven Hundred Sixty Two and Paise Seventy One Only	Per Square Meter	5766.00
9	Providing and fixing ply wood lining with butt jointing and nails (frame work and cove fillets to be measured and paid for separately) including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (i) 9mm thick (Excluding GST)	9.72	Sqm	805.08	Rupees Eight Hundred Five and Paise Eight Only	Per Square Meter	7825.00

10	Providing and fixing square edges cover fillets (beading) 19mmx6mm(Nineteen milimetre into six milimetre) section i/c mitring at junctions with wood screws and nails complete including carriage of materials in all leads and lifts as per directions of the Engineer-In-Charge.(i) 1st class deodar wood. (Excluding GST)	28.60	Rmt	67.80	Rupees Sixty Seven and Paise Seventy Nine Only	Per Running Meter	1939.00
11	Providing and fixing bright finished brass ball catcher 10 mm dia including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	18.00	Nos	59.32	Rupees Fifty Nine and Paise Thirty Two Only	Each	1068.00
12	Providing and fixing bright finished brass handles with screws etc complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 100mm (One hundred milimetre) (Excluding GST)	18.00	Nos	152.54	Rupees One Hundred Fifty Two and Paise Fifty Four Only	Each	2746.00
13	Applying priming coat over new wood and wood based surfaces after and including prepering the surface by thoroughly cleaning oil,grease,dirt and other foreign matter) sand papering and knotting including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	34.25	Sqm	29.66	Rupees Twenty Nine and Paise Sixty Six Only	Per Square Meter	1016.00
14	Painting two coats(excluding coat) on new wood and wood based surface with enamel paint to give an even shade including cleaning the surface of dirt,dust and other foreign matter,sand papering & stoping including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i) With white enemal paint. (Excluding GST)	34.25	Sqm	63.56	Rupees Sixty Three and Paise Fifty Five Only	Per Square Meter	2177.00
15	Providing wood work in frames of doors, windows, clerestory, windows and other frames wrought, framed and fixed in position including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(i) 2nd class deodar wood (Excluding GST)	0.005	Cum	84745.76	Rupees Eighty Four Thousand Seven Hundred Forty Five and Paise Seventy Six Only	Per Cubic Metre	424.00

16	Repair to plaster in patches of 2.50 square meter under and upto 10 to 15mm thick including cutting the patch in proper shape and re-plastering the surface of wall including disposal to the dumping ground with a lead of 20 metres with including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) Cement Mortar 1:5 (One cement: Five sand). (Excluding GST)	6.80	Sqm	237.29	Rupees Two Hundred Thirty Seven and Paise Twenty Eight Only	Per Square Meter	1614.00
17	Providing and fixing wire gauge shutters using galvanised M.S. wire gauge of I.S. gauge designation 85 G. with wire of dia 0.56 mm for doors windows and clerestorey windows including bright finished black enamelled iron hinges with necessary screws including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	2.00	Sqm	254.24	Rupees Two Hundred Fifty Four and Paise Twenty Three Only	Per Square Metre	508.00
18	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade (i) Old work (one or more coats) including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	170.00	Sqm	33.90	Rupees Thirty Three and Paise Eighty Nine Only	Per Square Meter	5763.00
19	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	72.00	Sqm	10.17	Rupees Ten and Paise Sixteen Only	Per Square Meter	732.00
20	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	106.25	Sqm	50.85	Rupees Fifty and Paise Eighty Four Only	Per Square Meter	5403.00
21	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i) One or more coats on old work (Excluding GST)	120.00	Sqm	50.85	Rupees Fifty and Paise Eighty Four Only	Per Square Meter	6102.00

22	Renewing glass panes , with putty and nails wherever necessary including racking out the old putty ,including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i)Float glass panes of nominal thickness 4 mm (weight not less than 10 kg/sqm) (Excluding GST)	2.00	Sqm	762.71	Rupees Seven Hundred Sixty Two and Paise Seventy One Only	Per Square metre	1525.00
22.1	Froster glass 4 mm thick	2.00	Sqm	847.46	Rupees Eight Hundred Forty Seven and Paise Forty Five Only	Per Square metre	1695.00
23	Providing and fixing Hydraulic channel for drawer in cupboard including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Nos	932.20	Rupees Nine Hundred Thirty Two and Paise Twenty Only	Each	932.00
24	Providing and fixing curtain rods of 1.25mm thick chromium plated brass plate with two chromium plated brass brackets fixed with brass screws and wooden plugs etc including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 25mm dia (Excluding GST)	1.80	Rmt	423.73	Rupees Four Hundred Twenty Three and Paise Seventy Two Only	Per Running Metre	763.00
25	Providing and fixing 1.50mm(One point Fifty milimetre) thick PVC antistatic vinyl Flooring plain or coloured, carbed or mosaic/metalled finish laid with approved adhesive on sub-floor (damp proofing treatment to be paid for separately) including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	10.08	Sqm	974.58	Rupees Nine Hundred Seventy Four and Paise Fifty Seven Only	Per Square metre	9824.00

26	Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, laid on 20mm (twenty milimetre) thick cement mortar 1:4 (One cement : four coarse sand), jointing with grey cement slurry @ 3.3 kg/sqm including grouting the joints with white cement and matching pigments etc., complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(i) Size of tile 600x600mm (six hundred into six hundred milimetre) (Excluding GST)	1.40	Sqm	1186.44	Rupees One Thousand One Hundred Eighty Six and Paise Forty Four Only	Per Square metre	1661.00
					Total		84324.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	
	CONDITION:- 1. Rates should be quoted for all heights including all leads and lifts. 2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.						

DNIT approved for Rs 84,324 /- Only) vide DNIT Register Sr.No **511** the financial year 2026-27 T/S NO.....DATE.....AMT 1,02,487 /- only

16443-44

31/9/26

Executive Engineer
B& R Division Kasumpti
HPPWD Winter Field Shimla -3

DRAFT SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER SHIMLA DIVISION No-1, H.P.P.W.D., SHIMLA-3.

Estimated Cost:- 83,315.00

Name of Work :- A/R & M/O various Type-I & Type-VI Qtrs of GAD at Parimahal Kasumpti, Shimla-9. (SH:-Repair work in Type-III Set no. 42 ,under Parimahal Section.) (Excluding GST)

Earnest Money :- 1,700.00

Time:- One Month.

Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount (Excluding GST)
				In figures	In words		
1	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge. (i)Nominal concrete 1:4:8 or leaner mix (i/c equivalent design mix) (Excluding GST)	0.26	Cum	1144.07	Rupees One Thousand One Hundred Forty Four and Paise Six Only	Per Cubic Metre	297.00
2	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i)For thickness of tiles 10 mm to 25 mm (Excluding GST)	5.04	Sqm	42.37	Rupees Forty Two and Paise Thirty Seven Only	Per Square Meter	214.00
3	Dismantling doors, windows and clerestory windows (steel or wood) shutter including chowkhats, architrave, holdfasts etc. complete and stacking within 50 metres including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) Of area 3 sq. metres and below. (Excluding GST)	2.00	Nos	254.24	Rupees Two Hundred Fifty Four and Paise Twenty Three Only	Each	508.00
4	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 1:3:6 (One cement : Three coarse sand) : Six graded stone aggregate 20 mm nominal size) (Excluding GST)	0.29	Cum	4915.25	Rupees Four Thousand Nine Hundred Fifteen and Paise Twenty Five Only	Per Cubic Metre	1425.00
4.1	(ii) 1:2:4 (1 cement : 2 Coarse sand) : 4 Graded stone aggregate 20 mm nominal size)	0.01	Cum	5593.22	Rupees Five Thousand Five Hundred Ninety Three and Paise Twenty Two Only	Per Cubic Metre	56.00

5	Providing and laying rectified Glazed Ceramic floor tiles of size 300x300 mm or more (thickness to be specified by the manufacturer), of 1st quality conforming to IS : 15622, of approved make, in all colours, shades, except White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick Cement Mortar 1:4 (1 Cement : 4 Coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including pointing the joints with white cement and matching pigments etc., including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	3.05	Sqm	1144.07	Rupees One Thousand One Hundred Forty Four and Paise Six Only	Per Square Meter	3489.00
6	Tile work in skirting, risers of steps and dado up to 2 m height over 12 mm thick bed of cement mortar 1:3 (1 cement :3 coarse sand) and jointed with grey cement slurry @ 3.3 kg/sqm, including pointing in white cement mixed with pigment of matching shade 300x600, including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.44	Sqm	1186.44	Rupees One Thousand One Hundred Eighty Six and Paise Forty Four Only	Per Square Meter	1708.00
7	Providing and fixing vitreous China wash down, water closet (European type, W.C. pan) with integral 'P' or 'S' trap including jointing the trap with soil pipe in cement mortar 1:1 (1 cement : 1 sand) (Seat and over to be measured and paid for separately) including carriage of materials in all leads as per directions of the Engineer-in-Charge (i) European type seat Make Ess Ess (Excluding GST)	1.00	Nos.	2881.36	Rupees Two Thousand Eight Hundred Eighty One and Paise Thirty Five Only	Each	2881.00
8	Providing and fixing plastic seat (solid / Holow type) and cover for wash down water closet with C.P. Brass hinges and rubber buffers. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. White plastic seat and Cover MAKE ESSCO (Excluding GST)	1.00	Nos.	932.20	Rupees Nine Hundred Thirty Two and Paise Twenty Only	Each	932.00
9	Providing and fixing P.V.C. low level flushing cistern with manually controlled device (handle lever) conforming to IS : 7231, with all fittings and fixtures including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 10 litre capacity - White MAKE ESSCO or Equivalent (Excluding GST)	1.00	Nos.	2203.39	Rupees Two Thousand Two Hundred Three and Paise Thirty Eight Only	Each	2203.00
10	Providing and fixing hand faucet including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Nos.	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three Only	Each	890.00

11	Providing and fixing C.P. Brass Towel rail complete with C.P. Brass brackets fixed to wooden plugs with C.P. Brass screws including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 600 mm long towel rail with total length of 645 mm, width 78 mm and effective height of 88 mm, weighing not less than 190 gms. (Excluding GST)	1.00	Nos.	762.71	Rupees Seven Hundred Sixty Two and Paise Seventy One Only	Each	763.00
12	Providing and fixing PTMT towel ring trapezoidal shape 215 mm long, 200 mm wide with minimum distances of 37 mm from wall face with concealed fittings arrangement of approved quality and colour, weighing not less than 88 gms including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. MAKE ESSCO or Equivalent (Excluding GST)	1.00	Nos.	720.34	Rupees Seven Hundred Twenty and Paise Thirty Three Only	Each	720.00
13	Providing and fixing 600x450 mm beveled edge mirror of superior glass (of approved quality) complete with 6 mm thick hard board ground fixed to wooden cleats with C.P. brass screws and washers including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Nos.	932.20	Rupees Nine Hundred Thirty Two and Paise Twenty Only	Each	932.00
14	Providing and fixing chromium plated brass soap dish with C.P. Brass brackets fixed to wooden cleats with C.P. Brass screws:- including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (E.S) MAKE ESSCO (Excluding GST)	1.00	Nos.	635.59	Rupees Six Hundred Thirty Five and Paise Fifty Nine Only	Each	636.00
15	Providing and fixing C.P. brass bib cock of approved quality conforming to IS:8931 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 15 mm nominal bore MAKE ESSCO (Excluding GST)	1.00	Nos.	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three Only	Each	890.00
15.1	15 mm nominal bore with 45 cm length	1.00	Nos.	932.20	Rupees Nine Hundred Thirty Two and Paise Twenty Only	Each	932.00
16	Providing and fixing unplasticised P.V.C. connection pipe with PTMT Nuts, collar and bush of approved quality and colour including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 15 mm nominal bore with 45 cm length (Excluding GST)	2.00	Nos.	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Each	339.00

17	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) Flexible pipe (a) 32 mm dia (Excluding GST)	1.00	Nos.	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Each	169.00
18	Providing and fixing 600x120x5 mm glass shelf with edges round off, supported on anodised aluminium angle frame with C.P. brass brackets and guard rail complete fixed with 40 mm long screws, rawl plugs etc., including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Nos.	2118.64	Rupees Two Thousand One Hundred Eighteen and Paise Sixty Four Only	Each	2119.00
19	Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:8931 including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 15mm nominal bore MAKE ESSCO (Excluding GST)	2.00	Nos.	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three Only	Each	1780.00
20	Providing and fixing high UPVC pipe complete with UPVC fitting and clamps, i/c cutting and making good the wall etc. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 15mm nominal bore (Excluding GST)	4.00	Rmt	254.24	Rupees Two Hundred Fifty Four and Paise Twenty Three Only	Per Running Meter	1017.00
20.1	(ii) 40 mm	1.00	Rmt	296.61	Rupees Two Hundred Ninety Six and Paise Sixty One Only	Per Running Meter	297.00
21	Providing and fixing high UPVC Union in UPVC pipe including cutting and threading the pipe and long screws etc complete (New work). including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 15mm nominal bore (Excluding GST)	1.00	Nos	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Each	169.00
21.1	(ii) 40 mm	1.00	Nos	211.86	Rupees Two Hundred Eleven and Paise Eighty Six Only	Each	212.00

22	Providing and fixing PVC reducer ISI marked including jointing with approved adhesive etc. complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 110mmx90 mm dia , (Excluding GST)	2.00	Nos	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Each	339.00
23	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 150x10mm (Excluding GST)	2.00	Nos.	67.80	Rupees Sixty Seven and Paise Seventy Nine Only	Each	136.00
23.1	(ii) 200x10 mm	2.00	Nos.	84.75	Rupees Eighty Four and Paise Seventy Four Only	Each	169.00
24	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 125 mm (Excluding GST)	2.00	Nos.	84.75	Rupees Eighty Four and Paise Seventy Four Only	Each	169.00
25	Providing and fixing bright finished brass hard drawn hooks and eyes including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 200 mm (Excluding GST)	2.00	Nos.	59.32	Rupees Fifty Nine and Paise Thirty Two Only	Each	119.00
26	Providing woodwork in frame of doors windows , clerestory , windows and other frames wrought framed and fixed in position , including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 2nd class deodar wood (Excluding GST)	0.010	Cum	84745.76	Rupees Eighty Four Thousand Seven Hundred Forty Five and Paise Seventy Six Only	Per Cubic Metre	847.00
27	Providing and fixing C.P brass extension nipple (size 15mm x 50 mm) of approved make and quality, as per direction of the Engineer-in-Charge. (Excluding GST)	2.00	Nos.	67.80	Rupees Sixty Seven and Paise Seventy Nine Only	Each	136.00

28	Providing and fixing 15mm mixer for kitchen sink with top / bottom swinging spout. including carriage of materials in all leads as per directions of the Engineer-in-Charge. MAKE ESS ESS/ESSCO (Excluding GST)	1.00	Nos.	3813.56	Rupees Three Thousand Eight Hundred Thirteen and Paise Fifty Five Only	Each	3814.00
29	Providing and fixing one hole basin mixing Faucet. including carriage of materials in all leads as per directions of the Engineer-in-Charge. MAKE ESS ESS/ESSCO (Excluding GST)	1.00	Nos.	3813.56	Rupees Three Thousand Eight Hundred Thirteen and Paise Fifty Five Only	Each	3814.00
30	Providing and fixing wall bend mixing faucet including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. MAKE ESS ESS/ESSCO or Equivalent (Excluding GST)	1.00	Nos.	3813.56	Rupees Three Thousand Eight Hundred Thirteen and Paise Fifty Five Only	Each	3814.00
31	Providing and fixing vitreous China wash basin with single hole for pillar tap with C.I. or M.S. brackets painted white including cutting holes and making good the same but excluding fittings including carriage of materials in all leads as per directions of the Engineer-in-Charge. (a) Flat back (i) 550mmx400mm MAKE ESS ESS/ESSCO or Equivalent (Excluding GST)	1.00	Nos.	4154.24	Rupees Four Thousand One Hundred Fifty Four and Paise Twenty Three Only	Each	4154.00
32	Providing and fixing 32 mm (thirty two milimetre) dia C.P. brass waste for wash basin or sink complete within all leads, lifts of materials and other incidentals. including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST) MAKE ESS ESS/ESSCO	1.00	Nos.	508.47	Rupees Five Hundred Eight and Paise Forty Seven Only	Each	508.00
33	Providing and fixing wire gauge shutters using galvanised M.S. wire gauge of I.S. gauge designation 85 G. with wire of dia 0.56 mm for doors windows and clerestorey windows including bright finished black enamelled iron hinges with necessary screws including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	5.00	Sqm	254.24	Rupees Two Hundred Fifty Four and Paise Twenty Three Only	Per Square Metre	1271.00
34	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty (i) Float glass panes of nominal thickness 4 mm including carriage of materials in all leads as per directions of the Engineer-in-Charge. (weight not less than 10kg/sqm) (Excluding GST)	2.00	Sqm	762.71	Rupees Seven Hundred Sixty Two and Paise Seventy One Only	Per Square Meter	1525.00

34.1	(ii) Frosted glass 4 mm thick .	1.00	Sqm	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three Only	Per Square Meter	890.00
35	Repair to plaster in patches of 2.50 square meter under and upto 10 to 15mm thick including cutting the patch in proper shape and re-plastering the surface of wall including disposal to the dumping ground with a lead of 20 metres with including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) Cement Mortar 1:5(One cement: Five sand). (Excluding GST)	1.54	Sqm	254.24	Rupees Two Hundred Fifty Four and Paise Twenty Three Only	Per Square Meter	392.00
36	Providing and fixing chicken mesh in wall with wood screws and nails including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.54	Sqm	237.29	Rupees Two Hundred Thirty Seven and Paise Twenty Eight Only	Per Square Metre	365.00
37	Dubbing out an old irregular walls average 10mm thick with including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) cement mortar 1:5 (One cement: Five sand). (Excluding GST)	1.54	Sqm.	211.86	Rupees Two Hundred Eleven and Paise Eighty Six Only	Per Square Metre	326.00
38	Providing and fixing PVC corner shelves complete with C.P. brass brackets fixed to wooden plugs with C.P. brass screws complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge (Excluding GST)	1.00	Nos	508.47	Rupees Five Hundred Eight and Paise Forty Seven Only	Each	508.00
39	Providing and fixing pedestal for wash basin completely recessed at the back for the reception of pipes and fittings including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(Excluding GST)	1.00	Nos.	2966.10	Rupees Two Thousand Nine Hundred Sixty Six and Paise Ten Only	Each	2966.00
40	Providing and fixing 100 mm sand cast Iron grating for gully trap, including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Nos.	169.49	Rupees One Hundred Sixty Nine and Paise Forty Nine Only	Each	169.00
41	Providing and fixing ply wood lining with butt jointing and nails (frame work and cove fillets to be measured and paid for separately) including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (i) 6mm (six milimetre)thick (Excluding GST)	2.00	Sqm	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three Only	Per Square Meter	1780.00

42	Providing and fixing square edges cover fillets (beading) 19mmx6mm(Nineteen milimetre into six milimetre) section i/c mitring at junctions with wood screws and nails complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge.(i)1st class deodar wood. (Excluding GST)	2.00	Rmt	72.03	Rupees Seventy Two and Paise Three Only	Per Running Meter	144.00
43	Providing and fixing PVC waste pipe for wash basin, including PVC waste fitting, including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) Flexible pipe , (a) 32 mm dia (Excluding GST)	2.00	Nos.	110.17	Rupees One Hundred Ten and Paise Sixteen Only	Each	220.00
44	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade (i) Old work (one or more coats) including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	180.00	Sqm	42.37	Rupees Forty Two and Paise Thirty Seven Only	Per Square Meter	7627.00
45	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	108.00	Sqm	10.17	Rupees Ten and Paise Sixteen Only	Per Square Meter	1098.00
46	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	54.00	Sqm	50.85	Rupees Fifty and Paise Eighty Four Only	Per Square Meter	2746.00
47	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade including carriage of materials in all leads as per directions of the Engineer-in-Charge. (i) One or more coats on old work, (Excluding GST)	95.00	Sqm	55.08	Rupees Fifty Five and Paise Eight Only	Per Square Meter	5233.00
48	Finishing wall with weather proof exterior grade emulsion of approved design Apexultima Protek) or its equarled on undecorated wall surfaces (two coats) to give an even shade and final finish after thoroughly cleaning the surface to remove all dirt, dust and other foreign matter etc including sand paper smooth including carriage of materials in all leads as per directions of the Engineer-in-Charge. (Excluding GST)	10.00	Sqm	105.93	Rupees One Hundred Five and Paise Ninety Three Only	Per Square Meter	1059.00
49	Melamine polishing on wood work (one or more coat) with including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	5.00	Sqm	296.61	Rupees Two Hundred Ninety Six and Paise Sixty One Only	Per Square Metre	1483.00

50	Disposal of muck /denris/ excavated earth upto site approved by Municipal Corporation surrounding Shimla upto all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Cum	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Per Cubic Metre	551.00
51	Providing and Fixing Glass Corner including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Nos	847.46	Rupees Eight Hundred Forty Seven and Paise Forty Five Only	Each	847.00
52	Providing and fixing 600x120x5 mm glass shelf with edges round off, supported on anodised aluminium angle frame with C.P. brass brackets and guard rail complete fixed with 40 mm long screws, rawl plugs etc., including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.00	Nos.	550.85	Rupees Five Hundred Fifty and Paise Eighty Four Only	Each	551.00
53	P/F stainless steel Curtain Road 20 mm includes carriage of material in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.50	Rmt	296.61	Rupees Two Hundred Ninety Six and Paise Sixty One Only	Per Running Metre	445.00
54	Providing and fixing 19mm thick water proof commercial board in shelves/shutters box for cup board with butt joints & fixing with nails & screws etc complete) including carriage of materials in all leads and lifts as per the directions of the Engineer-in-Charge. (Excluding GST)	2.63	Sqm	1186.44	Rupees One Thousand One Hundred Eighty Six and Paise Forty Four Only	Per Square Meter	3120.00
55	Providing and fixing 1.00mm thick coloured or plain lamination sheet (sunmica) on boards/ply wood sheets with approved adhesive and nails etc. complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	1.44	Sqm	805.08	Rupees Eight Hundred Five and Paise Eight Only	Per Square Metre	1159.00
56	Providing and fixing ply wood lining with but jointing and nails (frame work and cover fillets to be measured and paid for separately) including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (a) 6 mm thick. (Excluding GST)	2.20	Sqm	889.83	Rupees Eight Hundred Eighty Nine and Paise Eighty Three Only	Per Square Metre	1958.00
57	Providing and fixing square edges cover fillets (beading) 19mmx6mm section i/c mitring at junctions with wood screws and nails complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (a) 1st class deodar wood. (Excluding GST)	4.80	Rmt	84.75	Rupees Eighty Four and Paise Seventy Four Only	Per Running Meter	407.00

58	Providing and fixing bright finished brass ball catcher 10 mm dia including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (Excluding GST)	2.00	Nos	50.85	Rupees Fifty and Paise Eighty Four Only	Each	102.00
59	Providing and fixing bright finished brass handles with screws etc. complete including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (i) 100mm (Excluding GST)	2.00	Nos	152.54	Rupees One Hundred Fifty Two and Paise Fifty Four Only	Each	305.00
60	Applying priming coat over new wood and wood based surfaces after and i/c preparing the surface by thoroughly cleaning oil, grease dirt and other foreign matter sand papering and knotting including carriage of material in all leads and lifts as per direction of the Engineer-in-charge.(a)Ready mixed paint brushing wood primer pink. (Excluding GST)	4.83	Sqm	33.90	Rupees Thirty Three and Paise Eighty Nine Only	Per Square meter	164.00
61	Painting two coats (excluding coat) on new wood and wood based surface with enamel paint to give an even shade including cleaning the surface of dirt, dust and other foreign matter, sand papering & stopping including carriage of materials in all leads and lifts as per directions of the Engineer-in-Charge. (a) With white enamel paint. (Excluding GST)	4.83	Sqm	63.56	Rupees Sixty Three and Paise Fifty Five Only	Per Square meter	307.00
						Total	83315.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						
						G.Total	

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

DNIT approved for Rs. 83,315 /- Only vide DNIT Register Sr.No. 509 the financial year 2026-27. T/S NO.....DATE.....AMT 1,01,261 /- only

16447-48 3/9/26

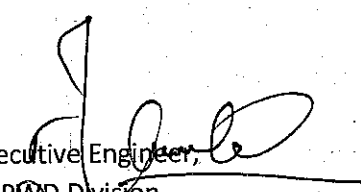
Executive Engineer
B & R Division Kasumpti
HPPWD Winter Field Shimla -3

SCHEDULE OF QUANTITY

Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.						Estimated Cost:- 83,32500	
NAME OF WORK:- Annual Repair and Maintenance on Shiv Mandir to Shakti Bihar 0/000 to 1/500 (SH:- Providing and fixing Crash Barrier W-Beam high intensity reflector in Kilometer 0/400 to 0/670 .(Without GST)						Earnest Money :- 1,700.00	
						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Providing and fixing on Crash Barricade W-Beam high intensity prismatic reflector type trapezoid metal body size 150 mmx80mm with 6.5 mm steel/zinc plated bolt, fixed with distance of 1 meter. Three side (left, right and front) laminated with plastic body (yellow/white /red colours etc) as directed But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	233.00	Nos	357.62	Rupees Three Hundred Fifty Seven and Paise Sixty Two Only	Per Each	83325.00
						Total	83325.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standards.


 Executive Engineer,
 HPPWD Division,
 Kasumpti Shimla

SCHEDULE OF QUANTITY							
Tender Inviting Authority : EXECUTIVE ENGINEER KASUMPTI DIVISION , H.P.P.W.D., SHIMLA-3.						Estimated Cost:- 84,398.00	
NAME OF WORK:- Annual Repair and Maintenance on Shiv Mandir to Shakti Bihar 0/000 to 1/500 (SH:- Providing and fixing Crash Barrier W-Beam high intensity reflector in Kilometer 0/120 to 0/370 .(Without GST)						Earnest Money :- 1,700.00	
						Time:- One Month	
Sr. No	Description of Work / Item (S)	No.of Qty.		Estimated Rate		Unit	Amount
				In figures	In words		
1	Providing and fixing on Crash Barricade W-Beam high intensity prismatic reflector type trapezoid metal body size 150 mmx80mm with 6.5 mm steel/zinc plated bolt, fixed with distance of 1 meter. Three side (left, right and front) laminated with plastic body (yellow/white /red colours etc) as directed But Excluding GST, including hauling of materials in all leads and lifts as per entire satisfaction and direction of Engineer-in- Charge.	236.00	Nos	357.62	Rupees Three Hundred Fifty Seven and Paise Sixty Two Only	Per Each	84398.00
						Total	84398.00
	Quoted rates Percentage in figures						
	Quoted rates Percentage in words						

CONDITION:-

1. Rates should be quoted for all heights including all leads and lifts.
2. Sample of all the material to be used on work shall be got approved from the Engineer-in-Charge in advance before actual use on work and any or all of the material which are available as per Indian standard in the market should confirm to bureau of indian standars.

Executive Engineer
HPPWD Division,
Kasumpti Shimla